


CUTOUT DIMENSIONS

Allow minimum of 3” clearance from the grill’s rear edge (3.75” from cutout) to the backsplash to allow hood to fully open.



Rotisserie Motor can be installed either on the right hand side or left hand side.

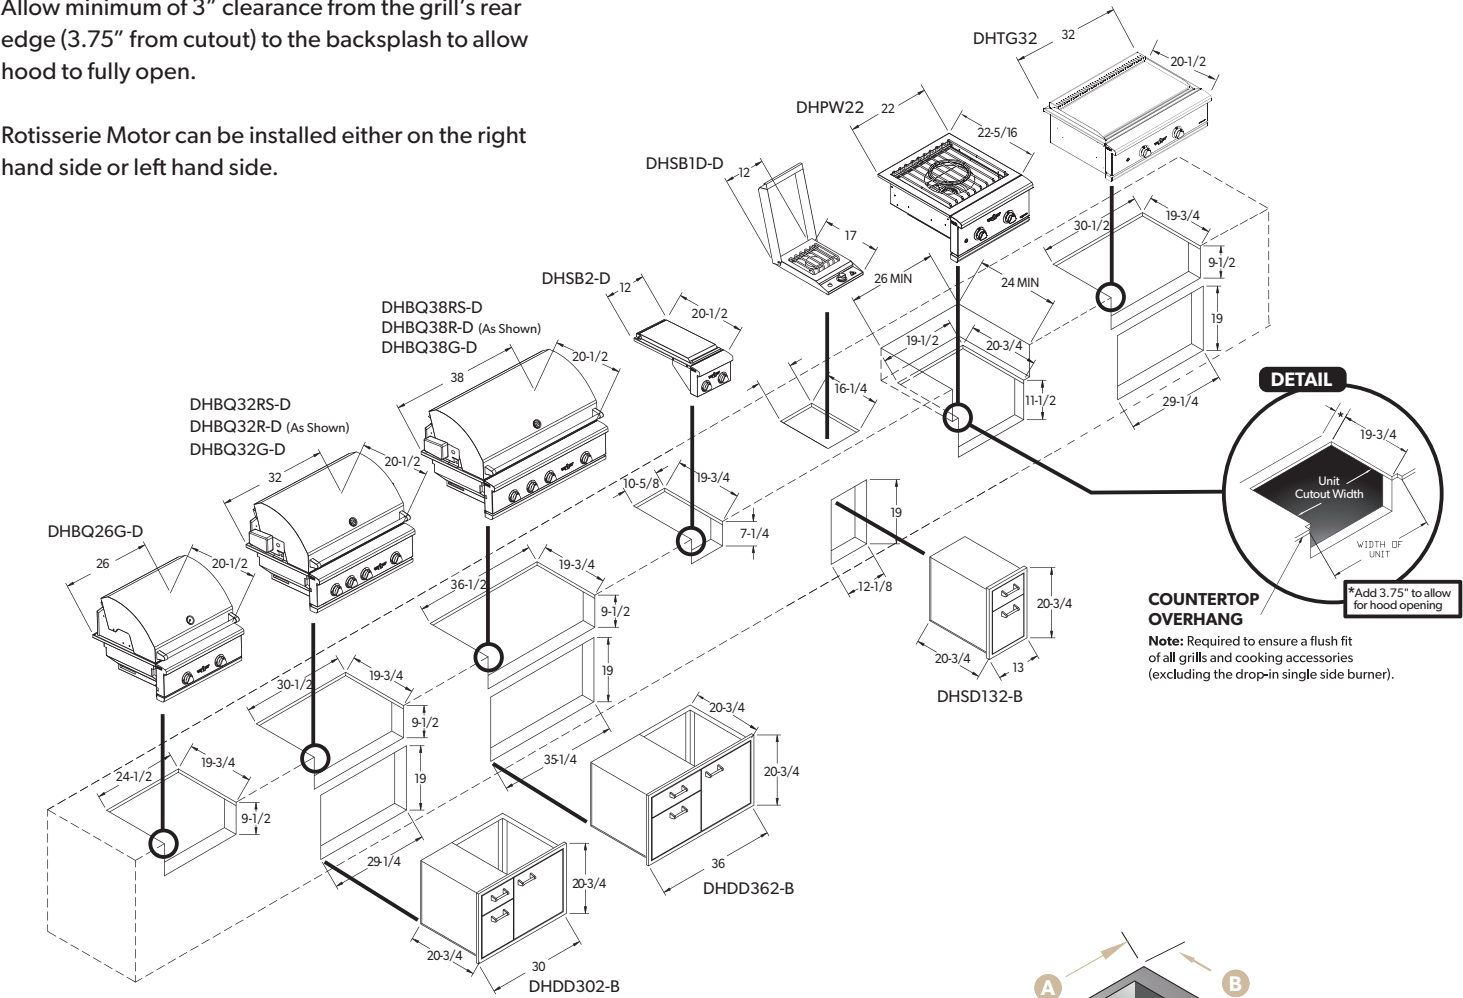

INSULATING JACKETS

- Stainless steel construction
- Polished stainless steel trim
- For installation in combustible construction

MODEL NUMBER	OVERALL DIMENSIONS			CUTOUT DIMENSIONS		
	A WIDTH	B DEPTH	C HEIGHT	D WIDTH	E DEPTH	F HEIGHT
DHIJ22	25-7/8"	23-1/2"	13"	24"	22-1/2"	12-1/2"
DHIJ26	30-7/8"	22-1/4"	11"	29"	21-1/2"	10-1/2"
DHIJ32	36-7/8"	22-1/4"	11"	35"	21-1/2"	10-1/2"
DHIJ38	42-7/8"	22-1/4"	11"	41"	21-1/2"	10-1/2"

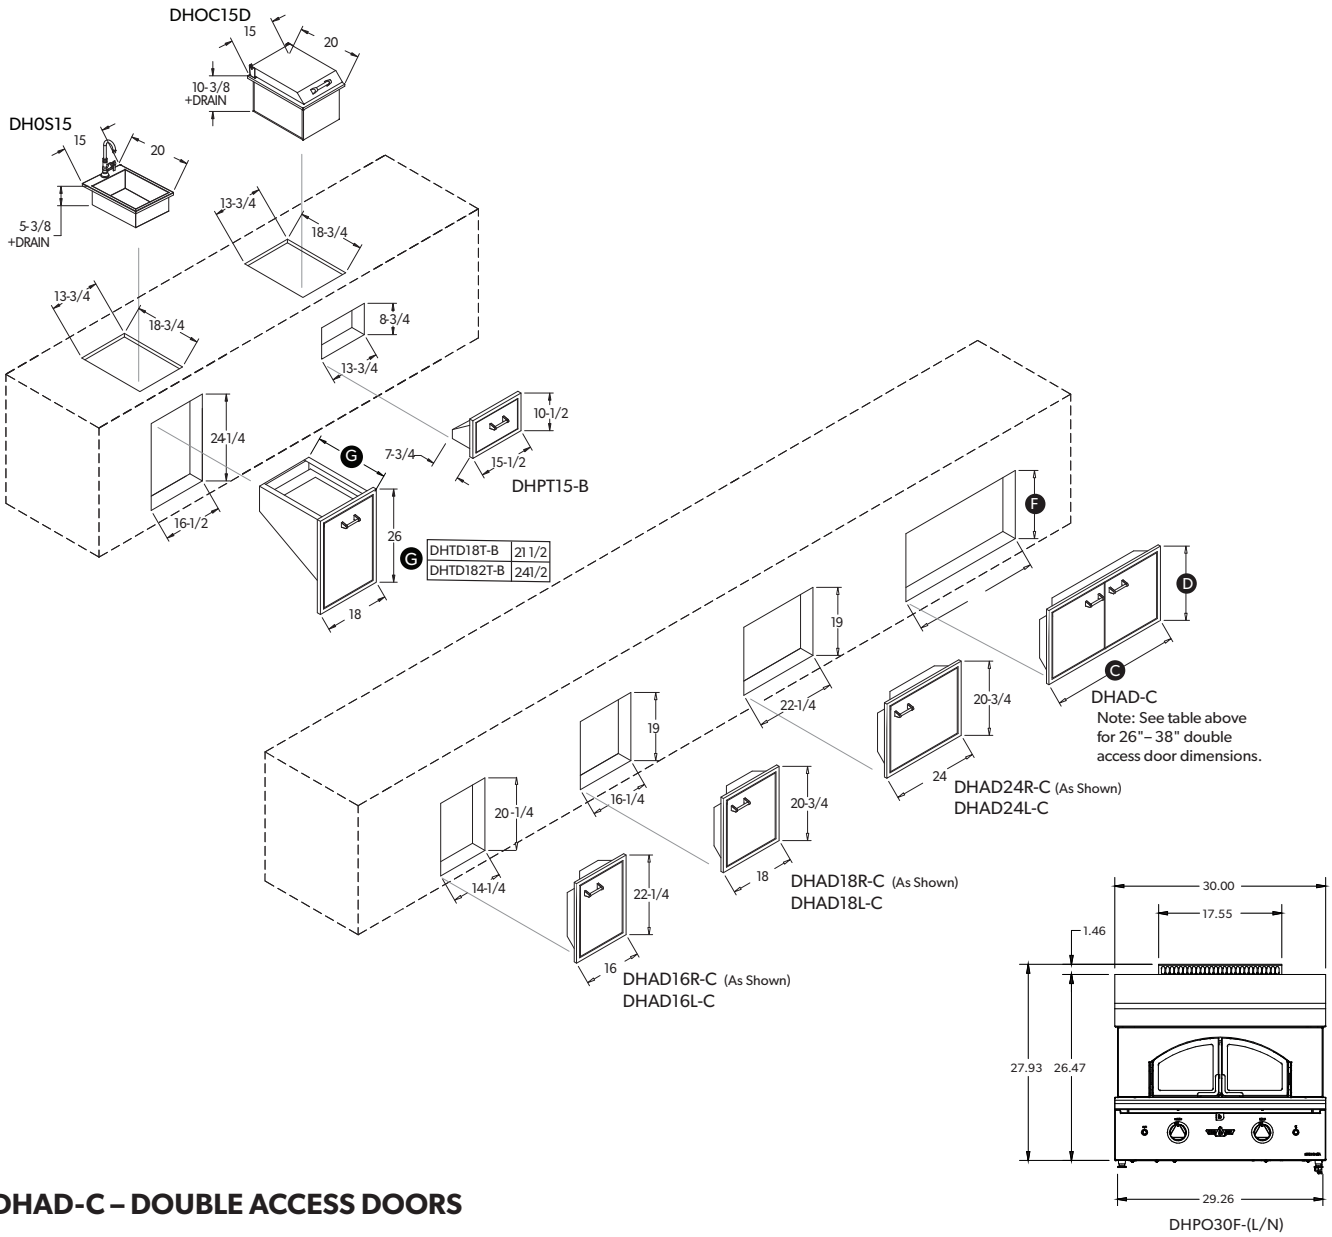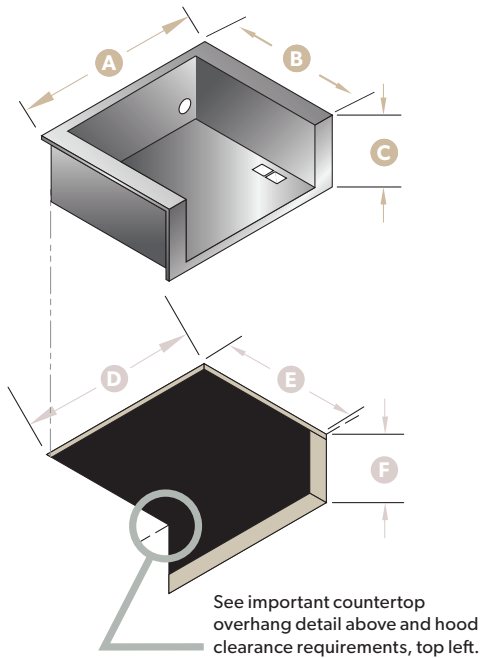

MODEL NUMBER	OVERALL DIMENSIONS		CUTOUT DIMENSIONS	
	C WIDTH	D HEIGHT	E WIDTH	F HEIGHT
DHAD26-C	26	20 3/4	24 1/4	19
DHAD30-C	30	20 3/4	28 1/4	19
DHAD32-C	32	20 3/4	30 1/4	19
DHAD36-C	36	20 3/4	34 1/4	19
DHAD38-C	38	20 3/4	36 1/4	19

