
588—ASSEMBLY



588—ASSEMBLY - Pg 2



Piece together valve assembly—— 1: Place spring small side touching brass. 2: Place shutter plate on bottom of burner as shown above, and turn to screw burner onto brass valve. Repeat steps for both burners.

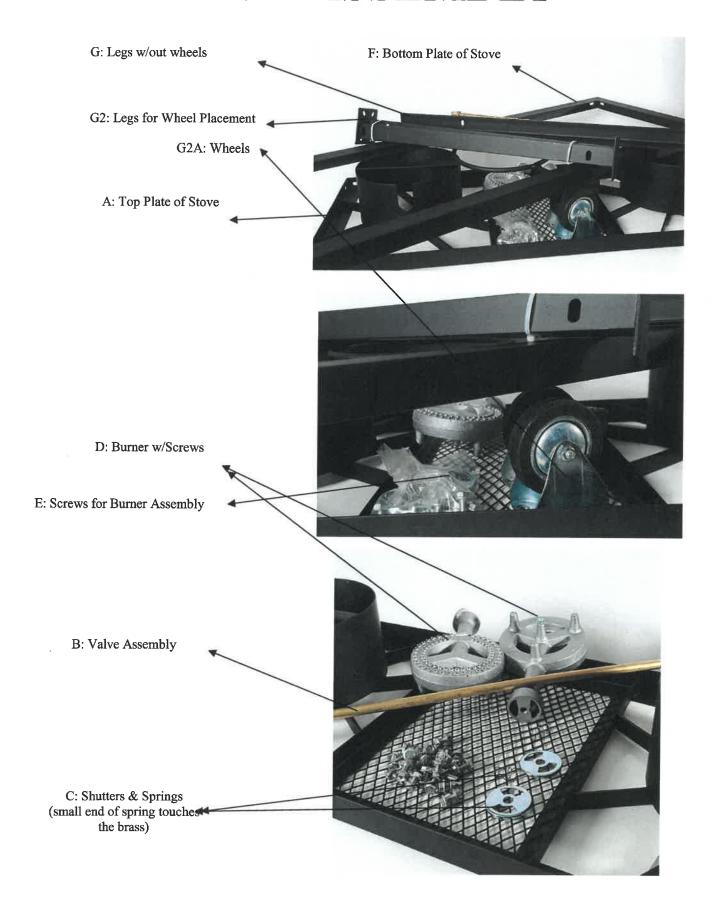

3: Remove mounting screw from bottom of both burners, place top plate of stove on a flat surface. Then place burners and valve assembly in place, and tighten mounting screws securely with a 3/8 socket.

Once Valve Assembly is secured (photo left) you are ready to attach the legs.



4: Attach legs snugly, but DO NOT tighten the screws all the way. You will need to stand the burner, right side up later, to be sure it is level, and only then will you tighten all the screws. Once legs are attached, 5: Install the Bottom Grate and Wheels as shown below. The bottom grate attaches to the inside of each leg.

