



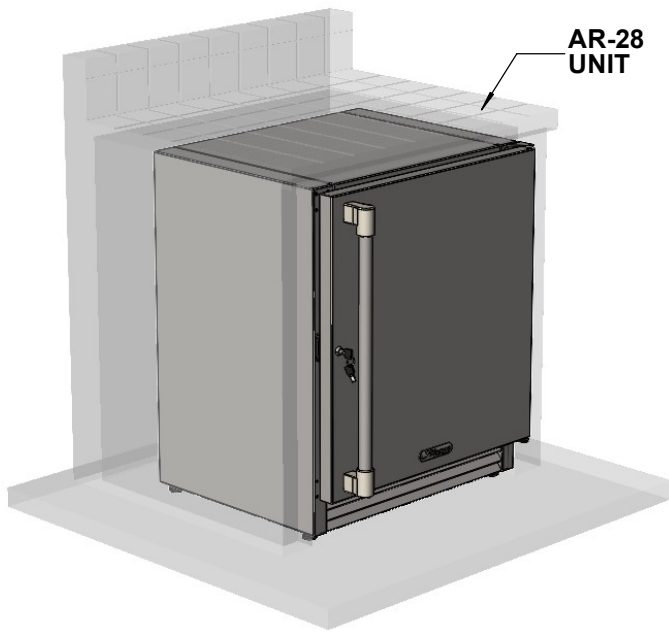

AR-28 TYPICAL INSTALLATION

COUNTER FRONT CUTOUT REQUIREMENTS

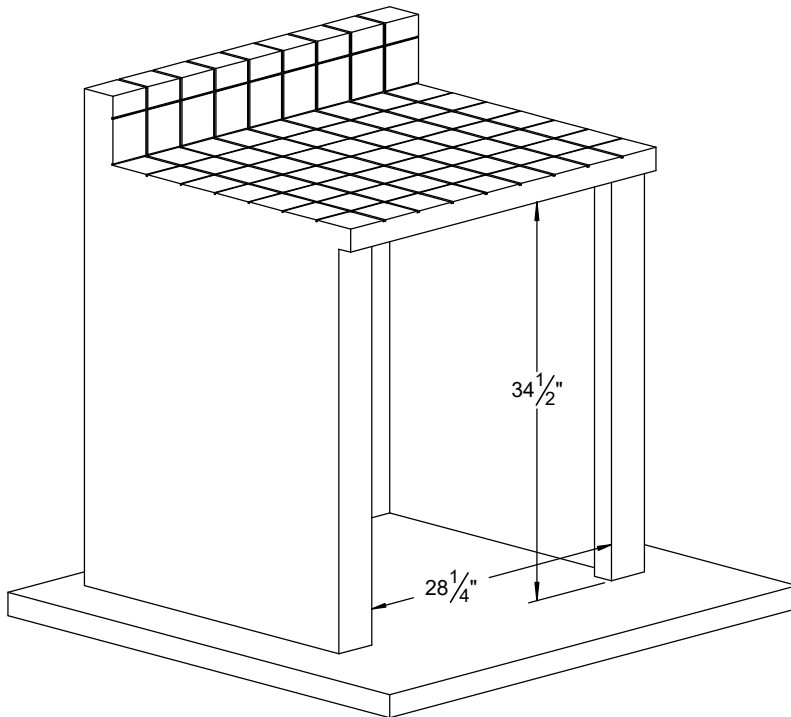

SPECIFICATIONS:
 R-290 REFRIGERANT
 115 VAC - 1 Ø - 3W - 2.1 AMPS
 1.5 RLA - 6.5 LRA - 2.5 MCA
 MOC PD 15 AMPS

GROUNDING RECEPTACLE REQUIRED
GFCI RECOMMENDED

