


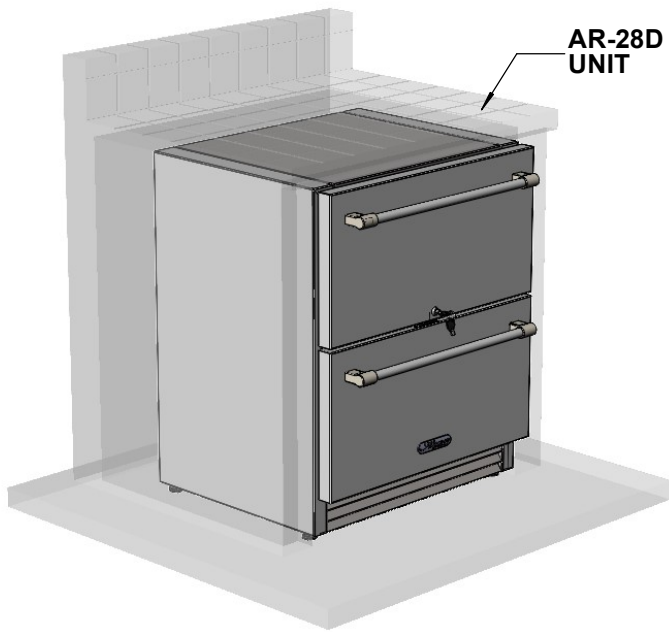
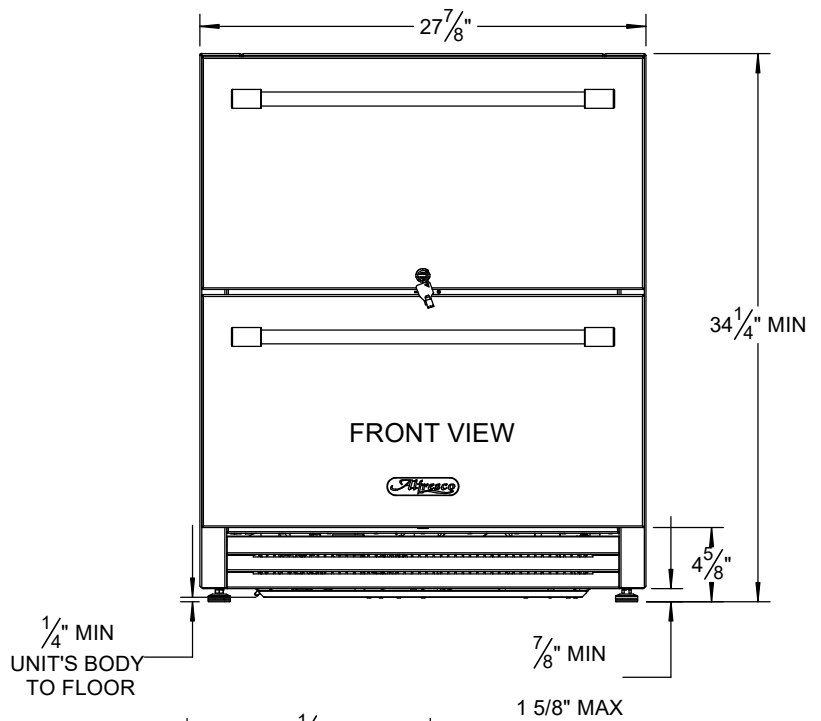
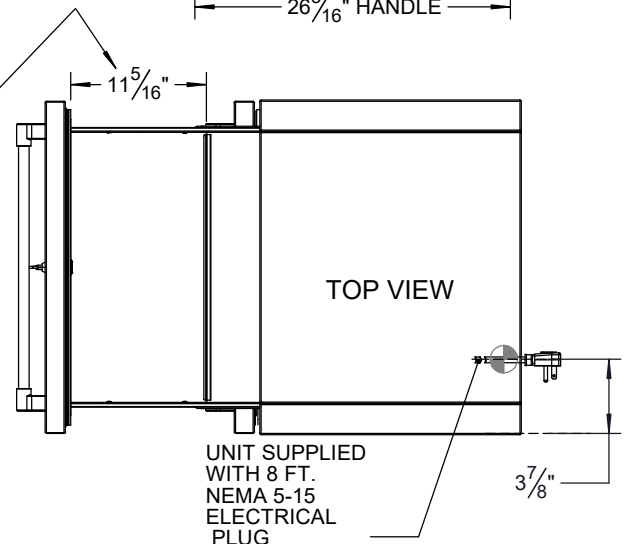




AR-28D TYPICAL INSTALLATION

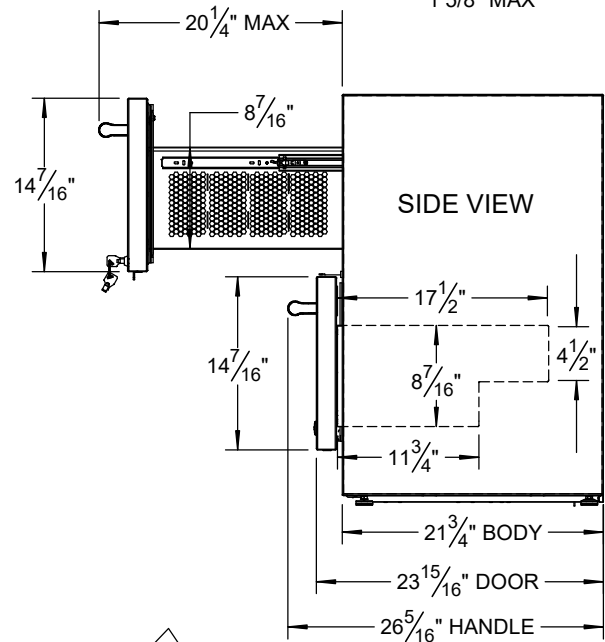

COUNTER FRONT CUTOUT REQUIREMENTS

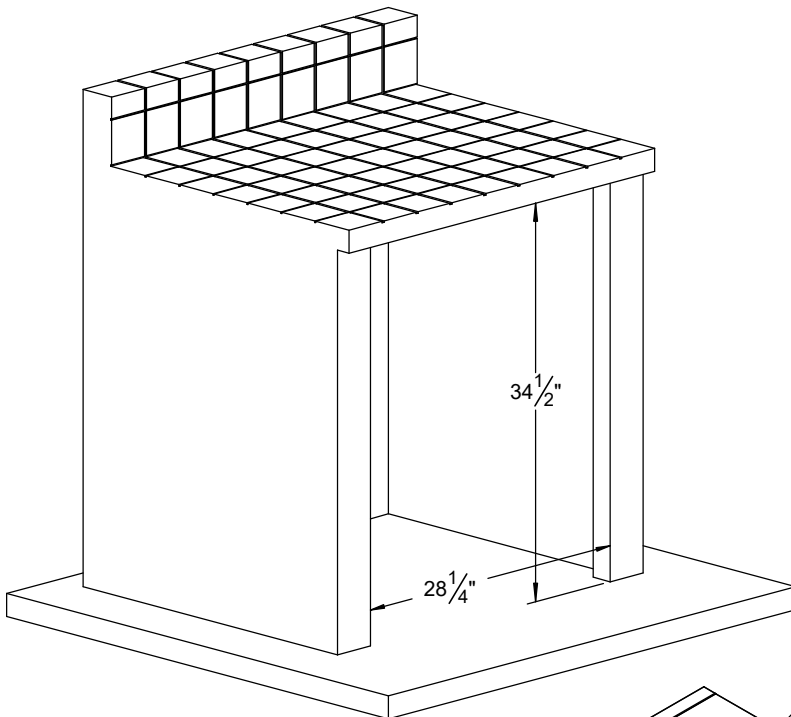

SPECIFICATIONS:
R-290 REFRIGERANT
115 VAC - 1 Ø - 3W - 2.1 AMPS
1.5 RLA - 6.5 LRA - 2.5 MCA
MOC PD 15 AMPS

GROUNDING RECEPTACLE REQUIRED
GFCI RECOMMENDED