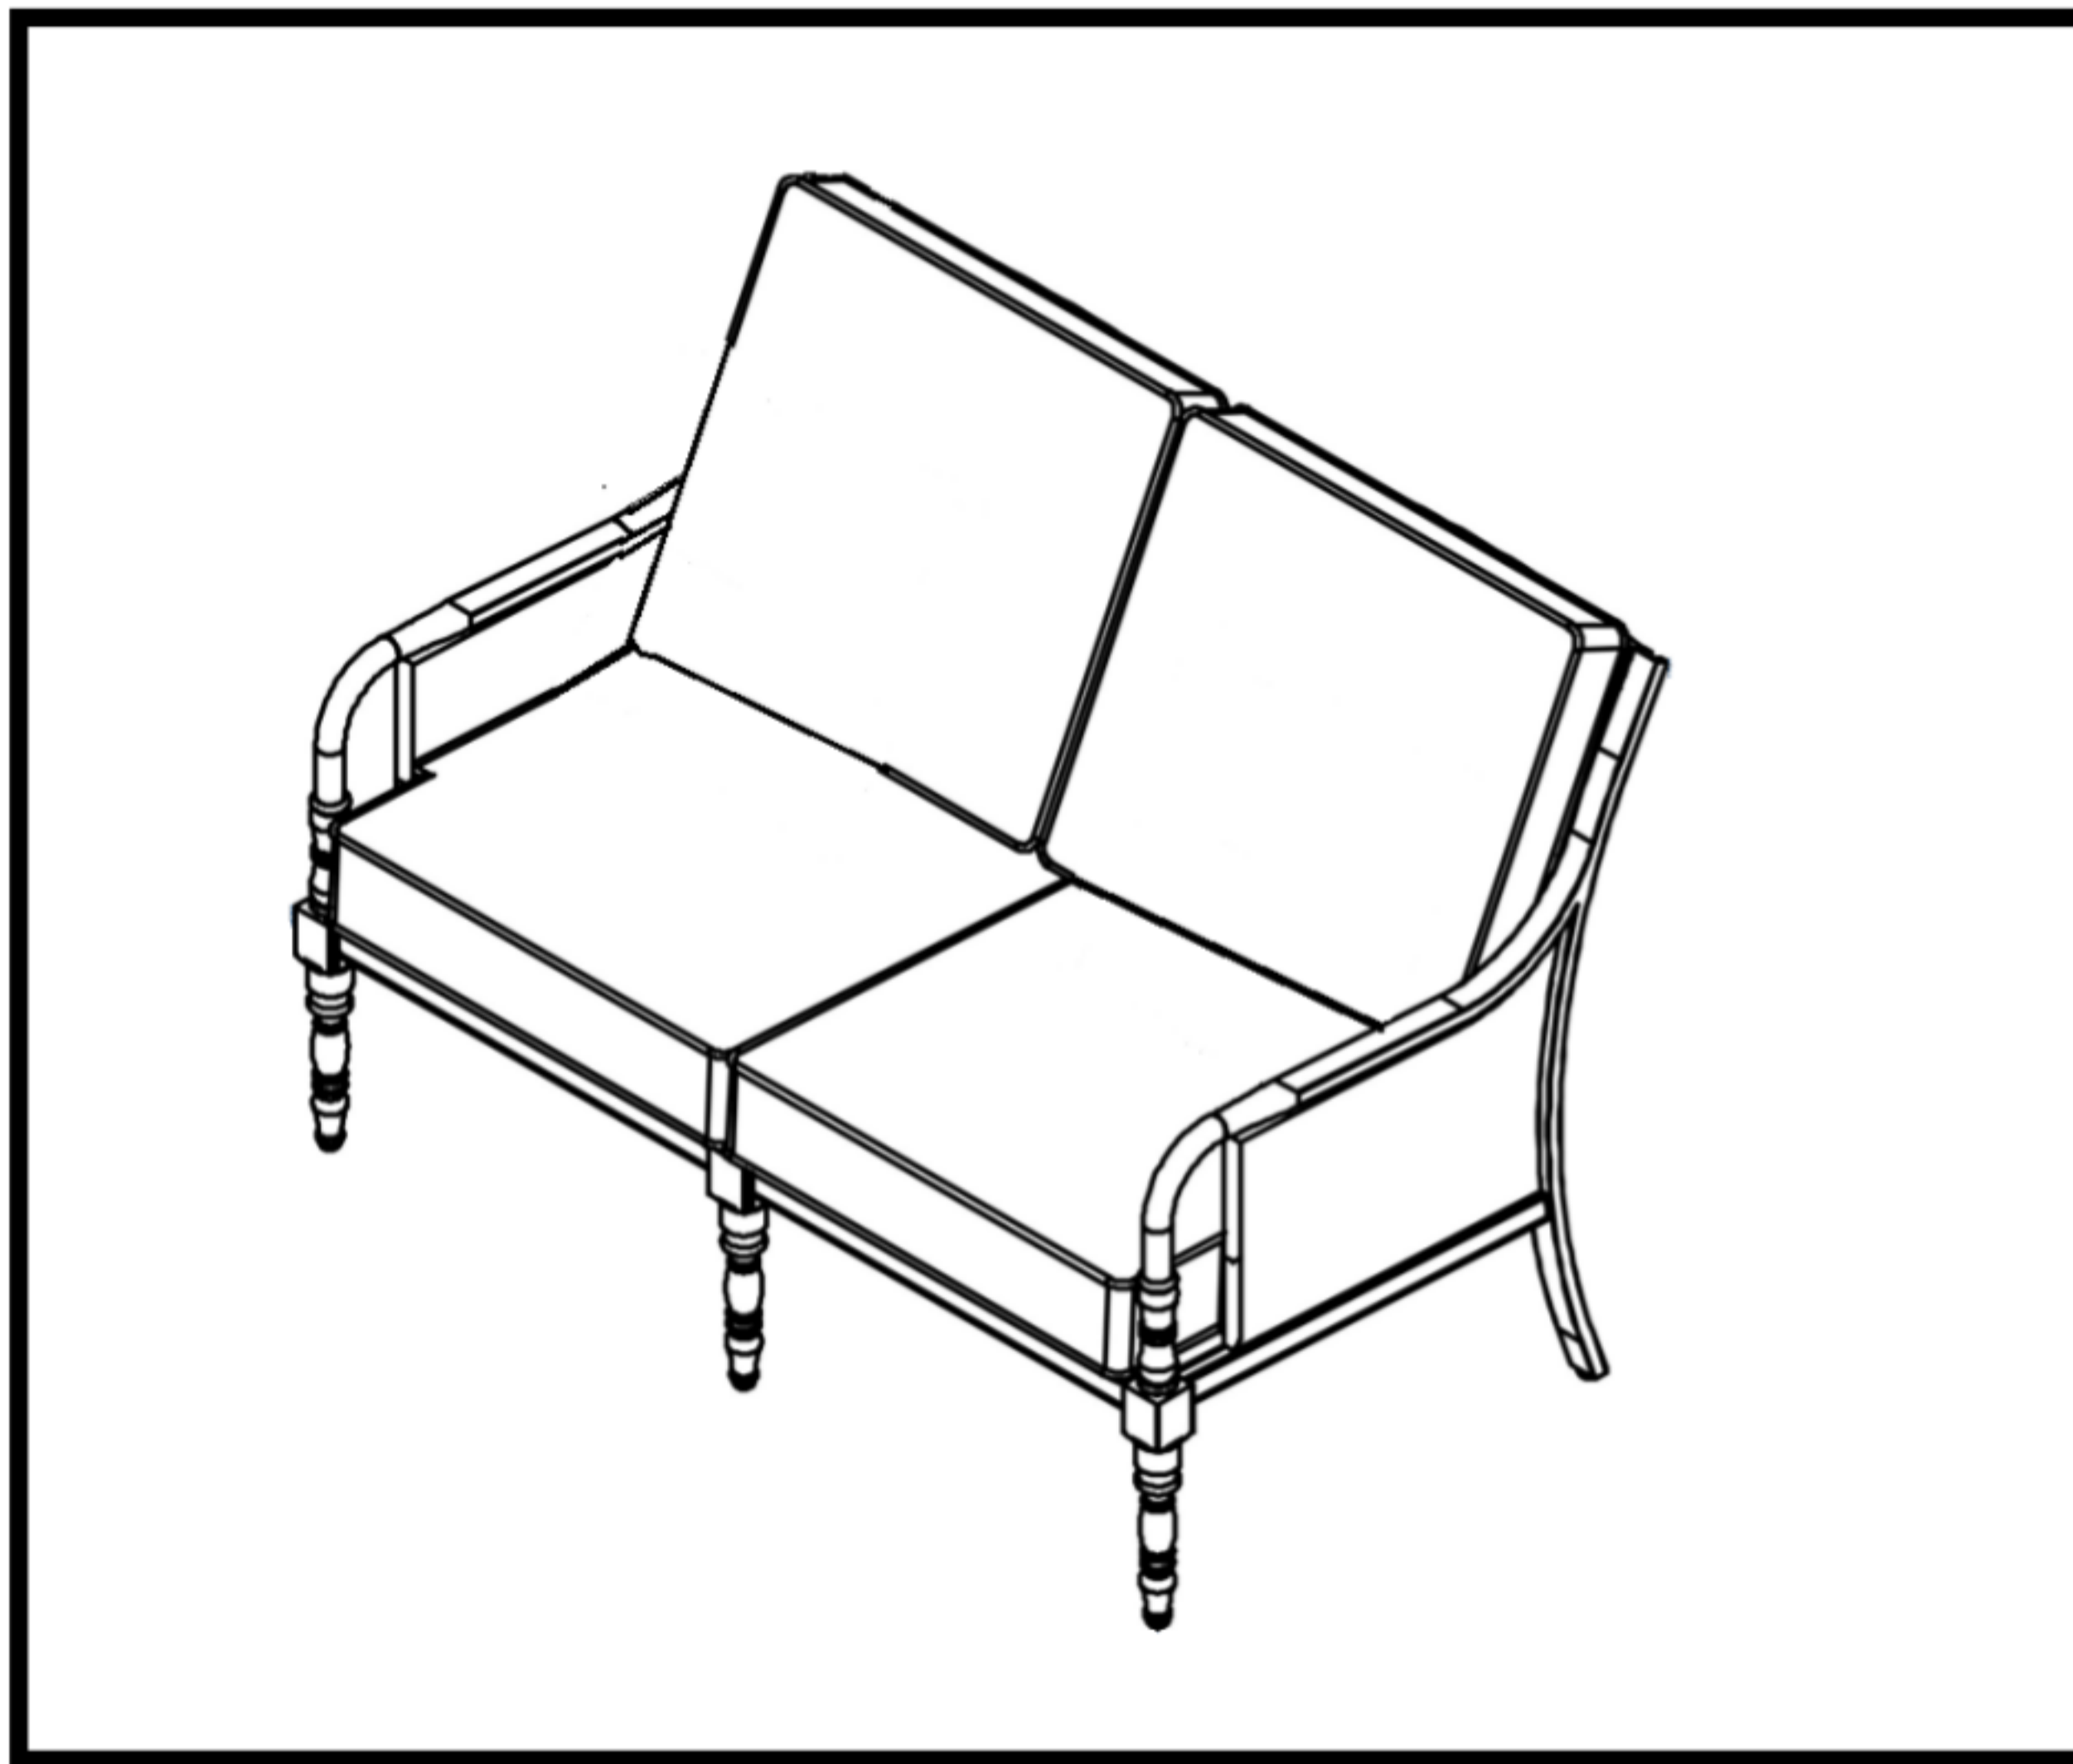




Arabella Aluminum Loveseat



Customer Service

CustomerService@ShoppersChoice.com

Monday-Friday 7-9, Sat. 9-3, Sun. 12-6 CST

Toll Free: 1-877-743-2269

www.ShoppersChoice.com

WARNING





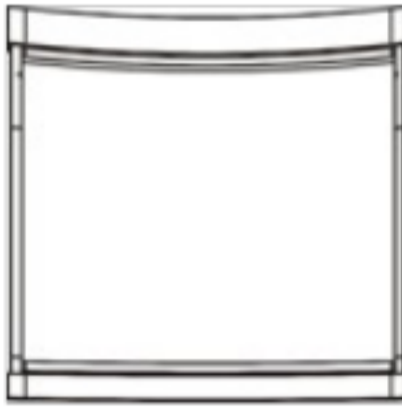



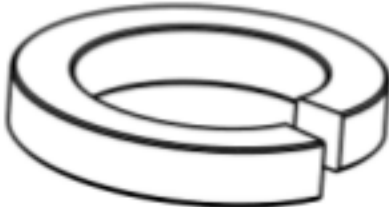
Please read instructions carefully and thoroughly before assembling. Check parts against the parts list to make sure you have all the parts needed for proper assembly. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

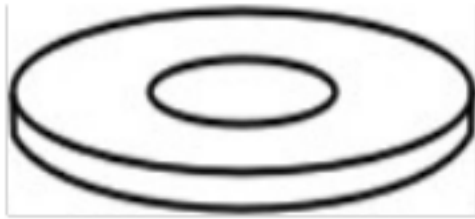

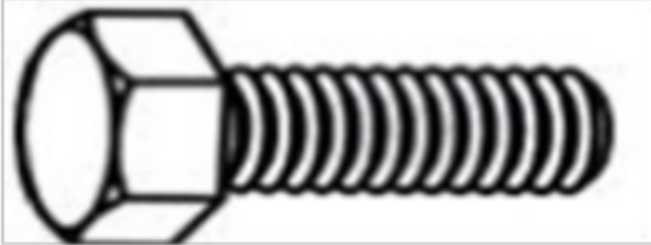
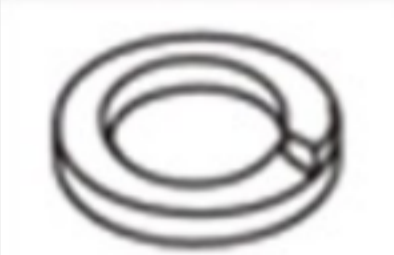







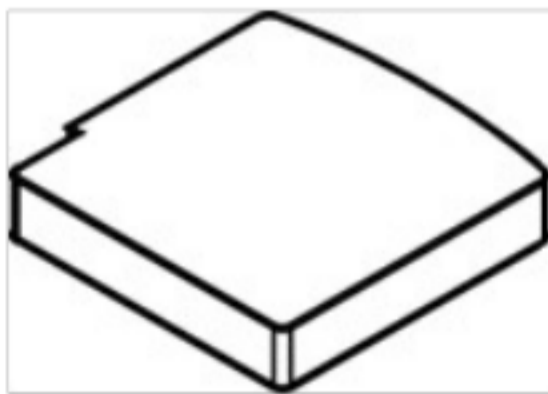
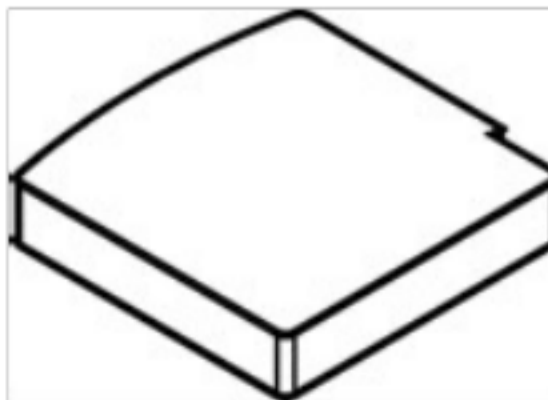
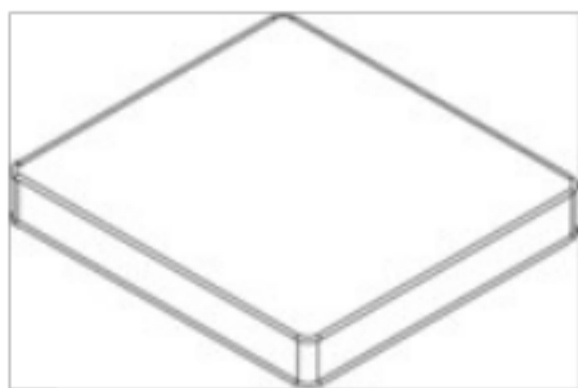
DO NOT ATTEMPT TO ASSEMBLE IF PARTS ARE MISSING OR DAMAGED.

IMPROPER ASSEMBLY MAY RESULT IN DAMAGE OR SERIOUS INJURY .

To assemble, place the loveseat on a non-abrasive flat surface to prevent scratching.

PARTS LIST

PART	DESCRIPTION	PICTURE	QTY
A	Left arm		1
B	Right arm		1
C	Middle leg		2
D	Chair seat		2
E	Chair back		2
F	Bolt(1/4X1.181")		12
G	Bolt(1/4X1.575")		4
H	Bolt(1/4X3.35")		2
I	Φ8mm Lock washer		18

PART	DESCRIPTION	PICTURE	QTY
J	Φ12mm Flat Washer		20
K	Nut		2
L	Bolt(5/16X 0.984")		4
M	Φ14mm Lock washer		4
N	Φ16mm Flat washer		4
O	Bolt cover		16
P	Large bolt cover		4
Q	Nut cover		2
R	Bolt cover		2
S	Hex screw driver		1
T	Washer		1
U	Left seat cushion		1
V	Right seat cushion		1
W	Back cushion		2

1 Attach the chair back (D) to left arm (A) by inserting bolts (F) through lock washers (I) and flat washers (J). Do not tighten the bolts at this point.

Using bolt (L), lock washer (M) and flat washer (N) attach the front chair seat (D) joint to the front left arm leg. Do not tighten the bolt at this point.

Next attach the chair seat (D) to left arm (A) by inserting bolts (G) through lock washers (I) and washers (J). Do not tighten the bolts at this point.

(Figure 1)

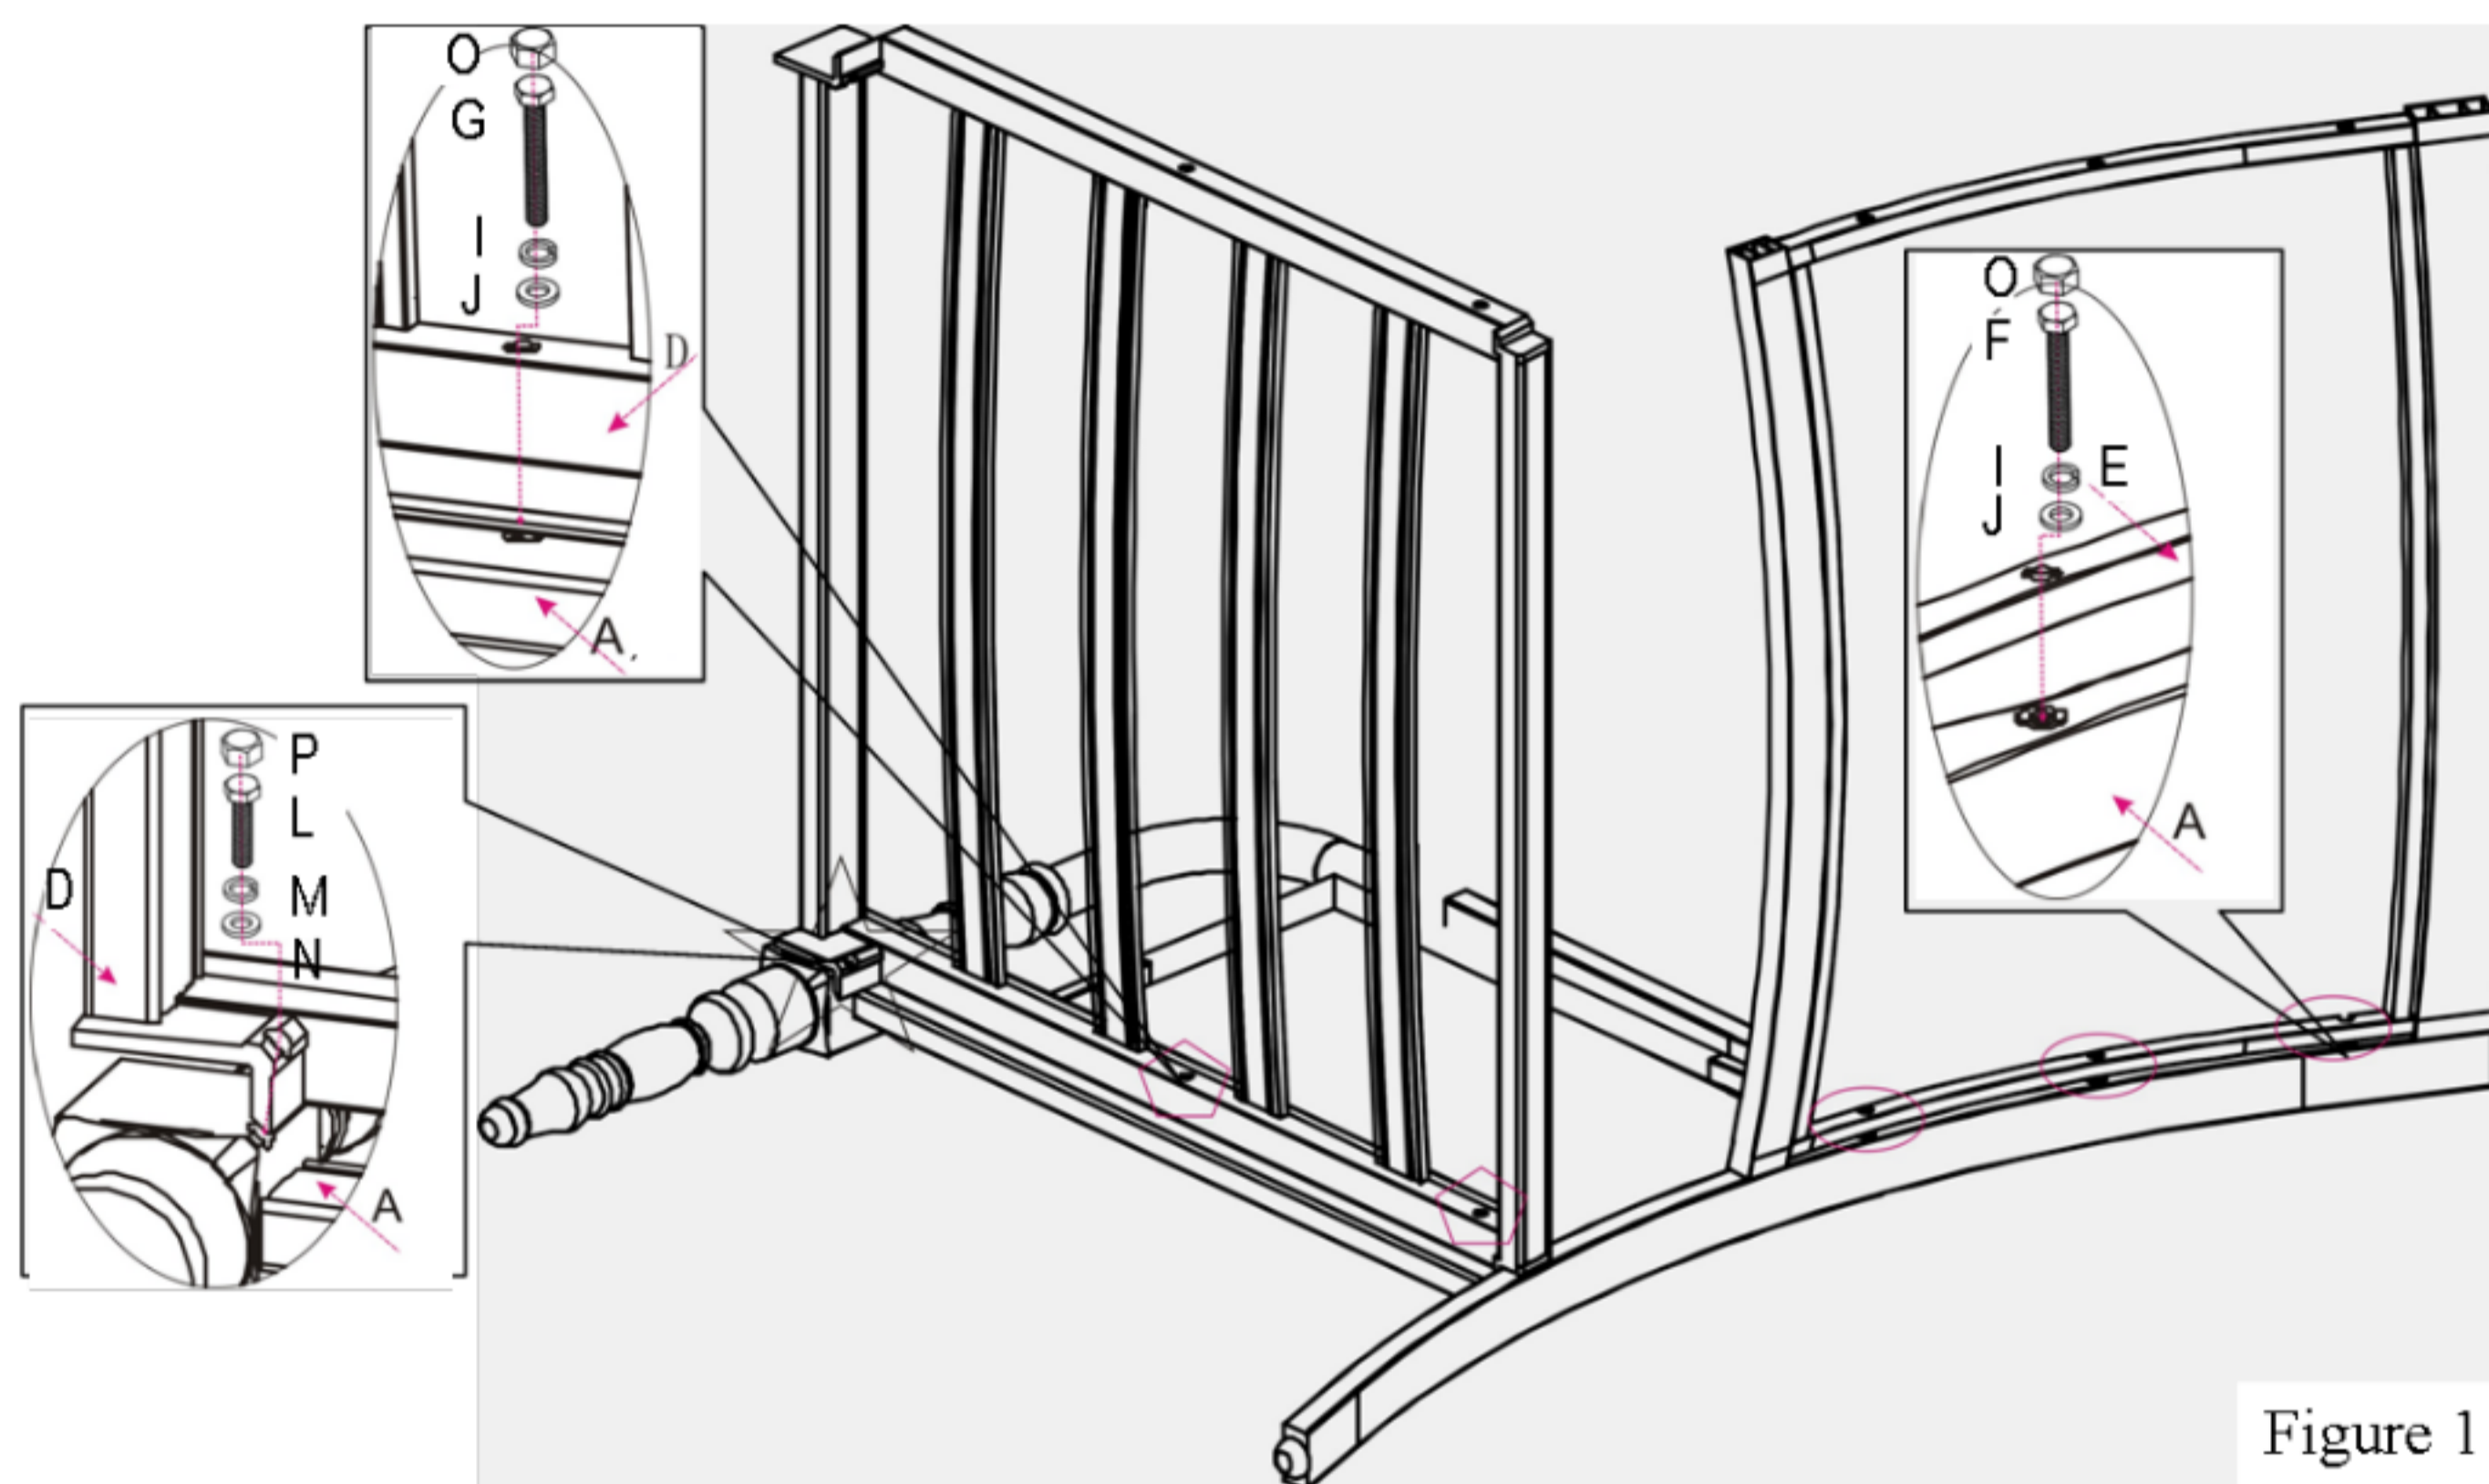


Figure 1

2 Repeat the steps in figure 1 to assemble the right arm (B), back (E) and seat (D) assembly.

3 Attach the right arm back and left arm back to the middle leg (C) by inserting bolts (F) through lock washers (I) and washers (J). Do not tighten the bolts at this point.

Attach the right arm seat and left arm seat to the middle leg (C) by bolts (H) through flat washers (J), lock washers (I) and nuts (R). Do not tighten the bolts at this point.

Using bolt (L), lock washer (M) and flat washer (N) attach the front chair seat joints to the front center arm leg. Do not tighten the bolt at this point.

(Figure 2)

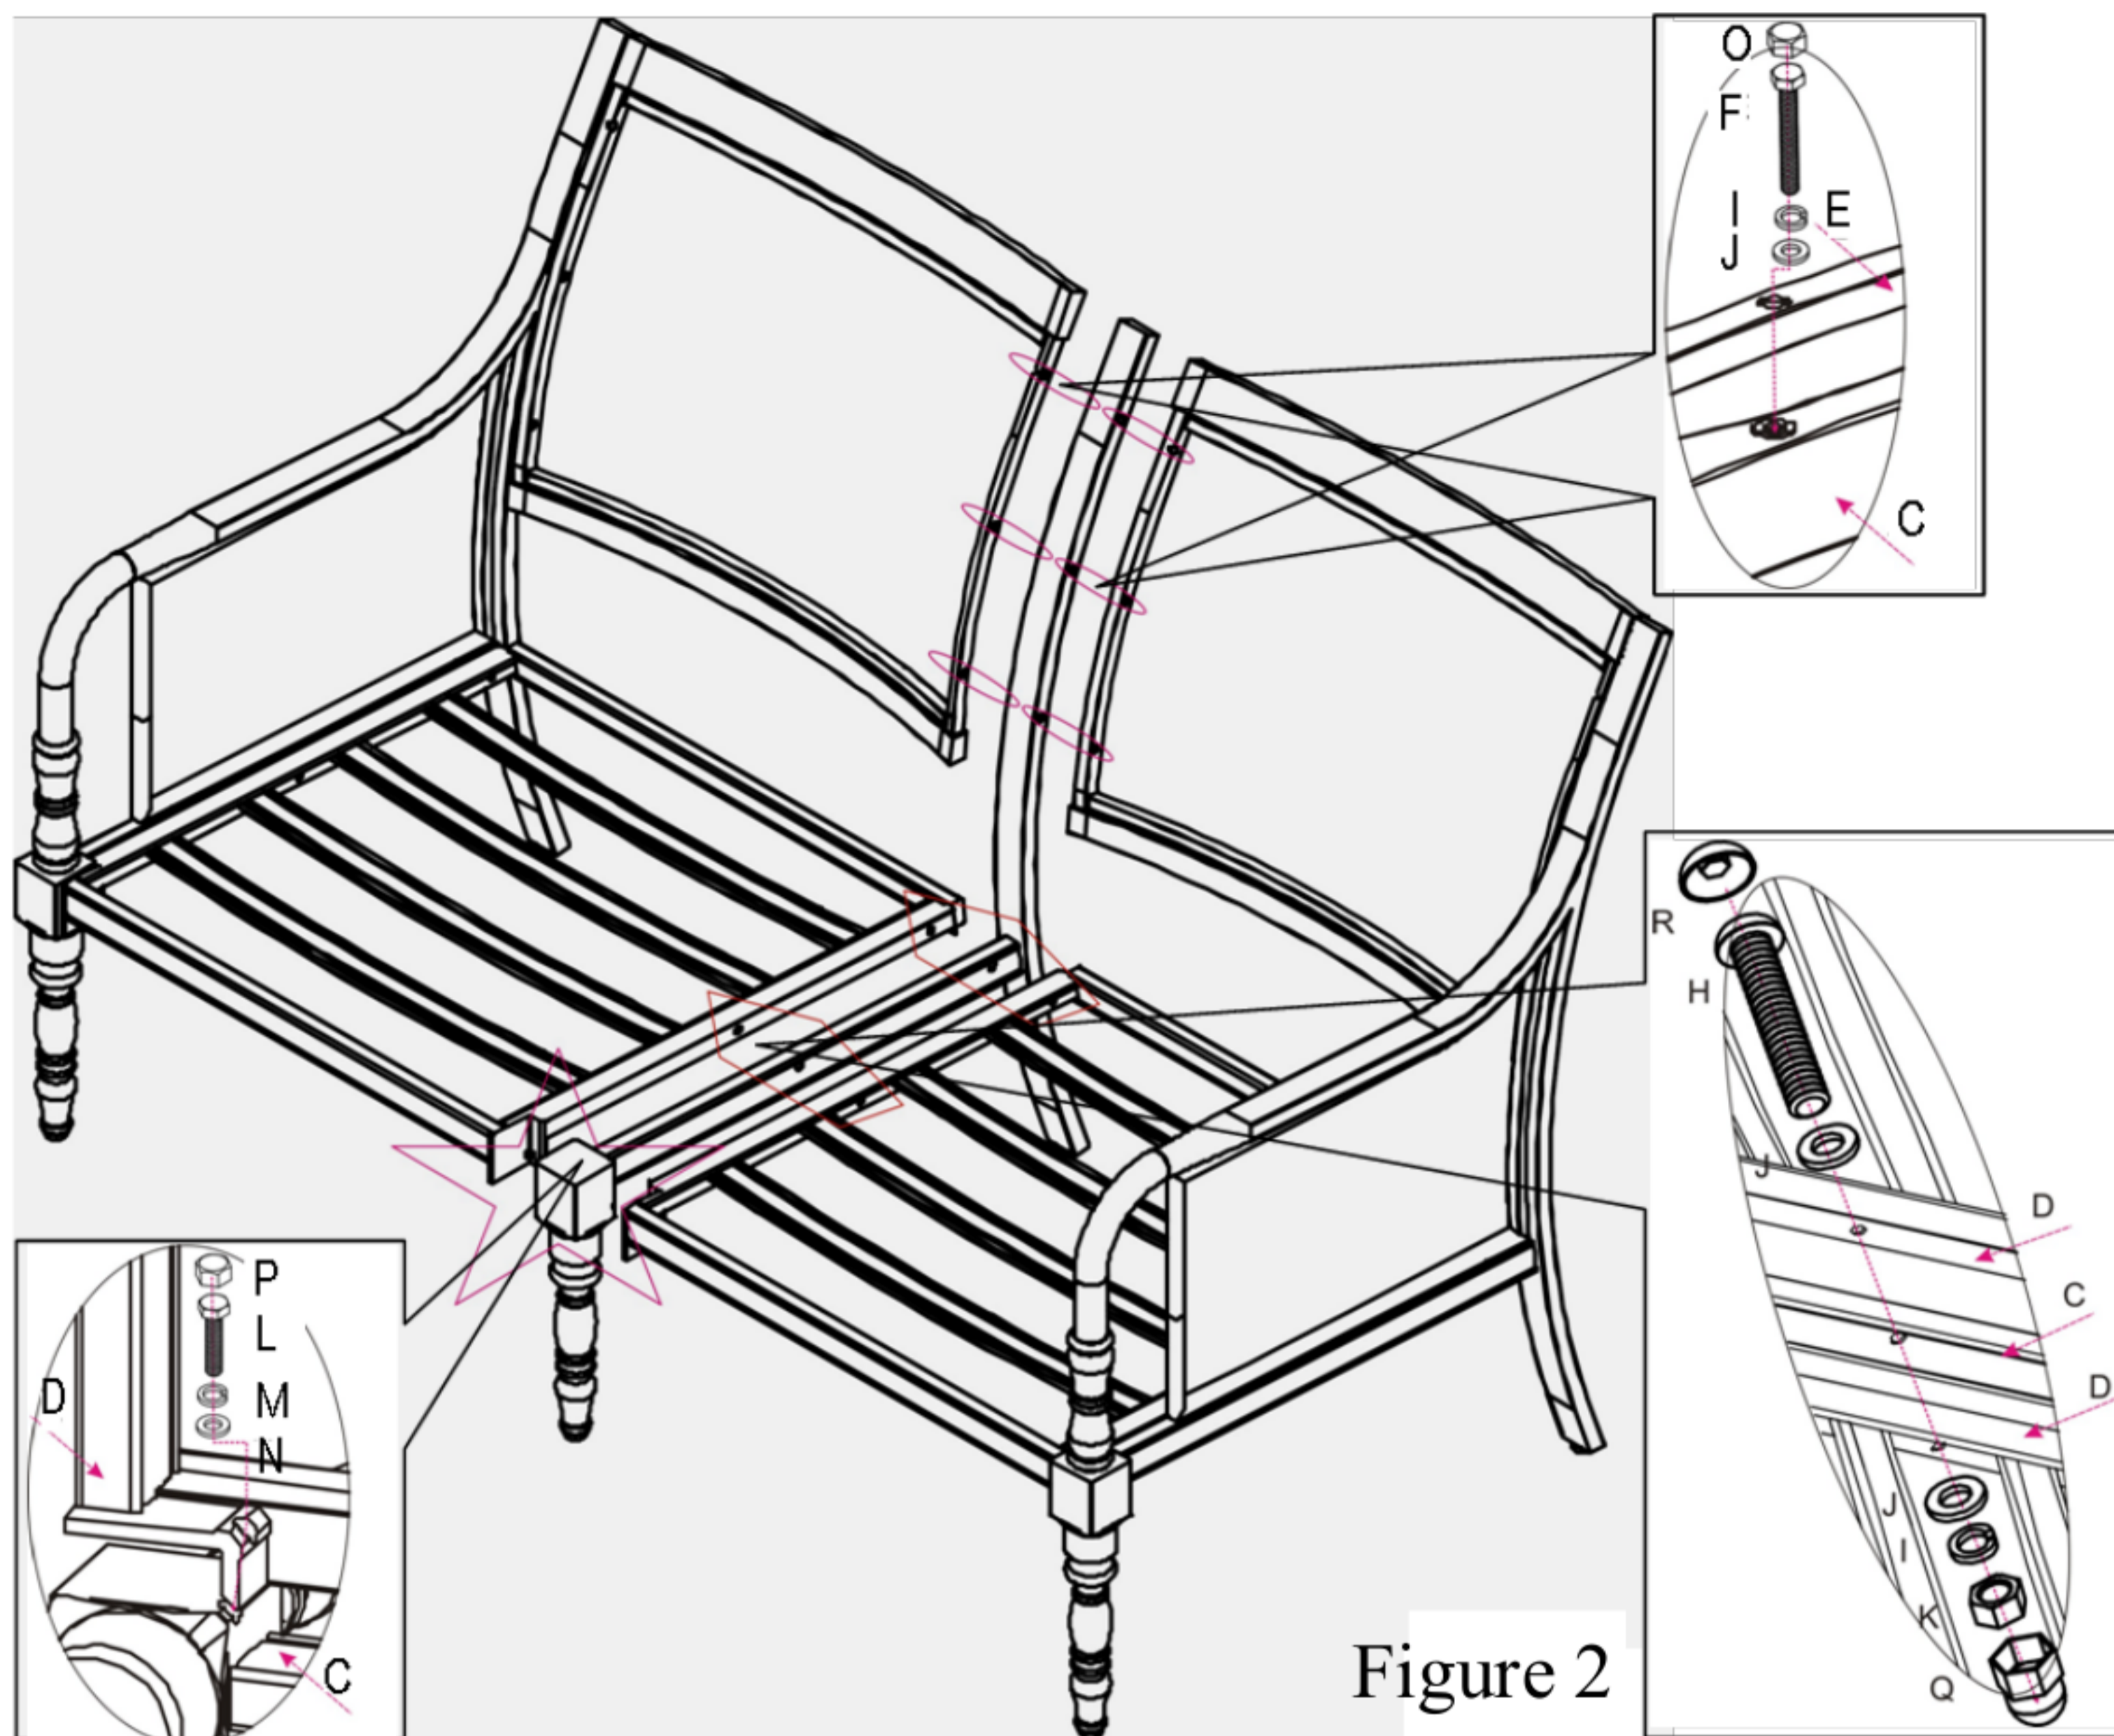


Figure 2

4 Once all pieces are assembled hand tighten all bolts, and cover using nut covers (Q) and bolt covers (R).

5 With the help of another person turn the loveseat into an upright position and place the seat cushion (U&V) and back cushion (W) and on the chair.

The loveseat is ready for your enjoyment.
(Figure 3)

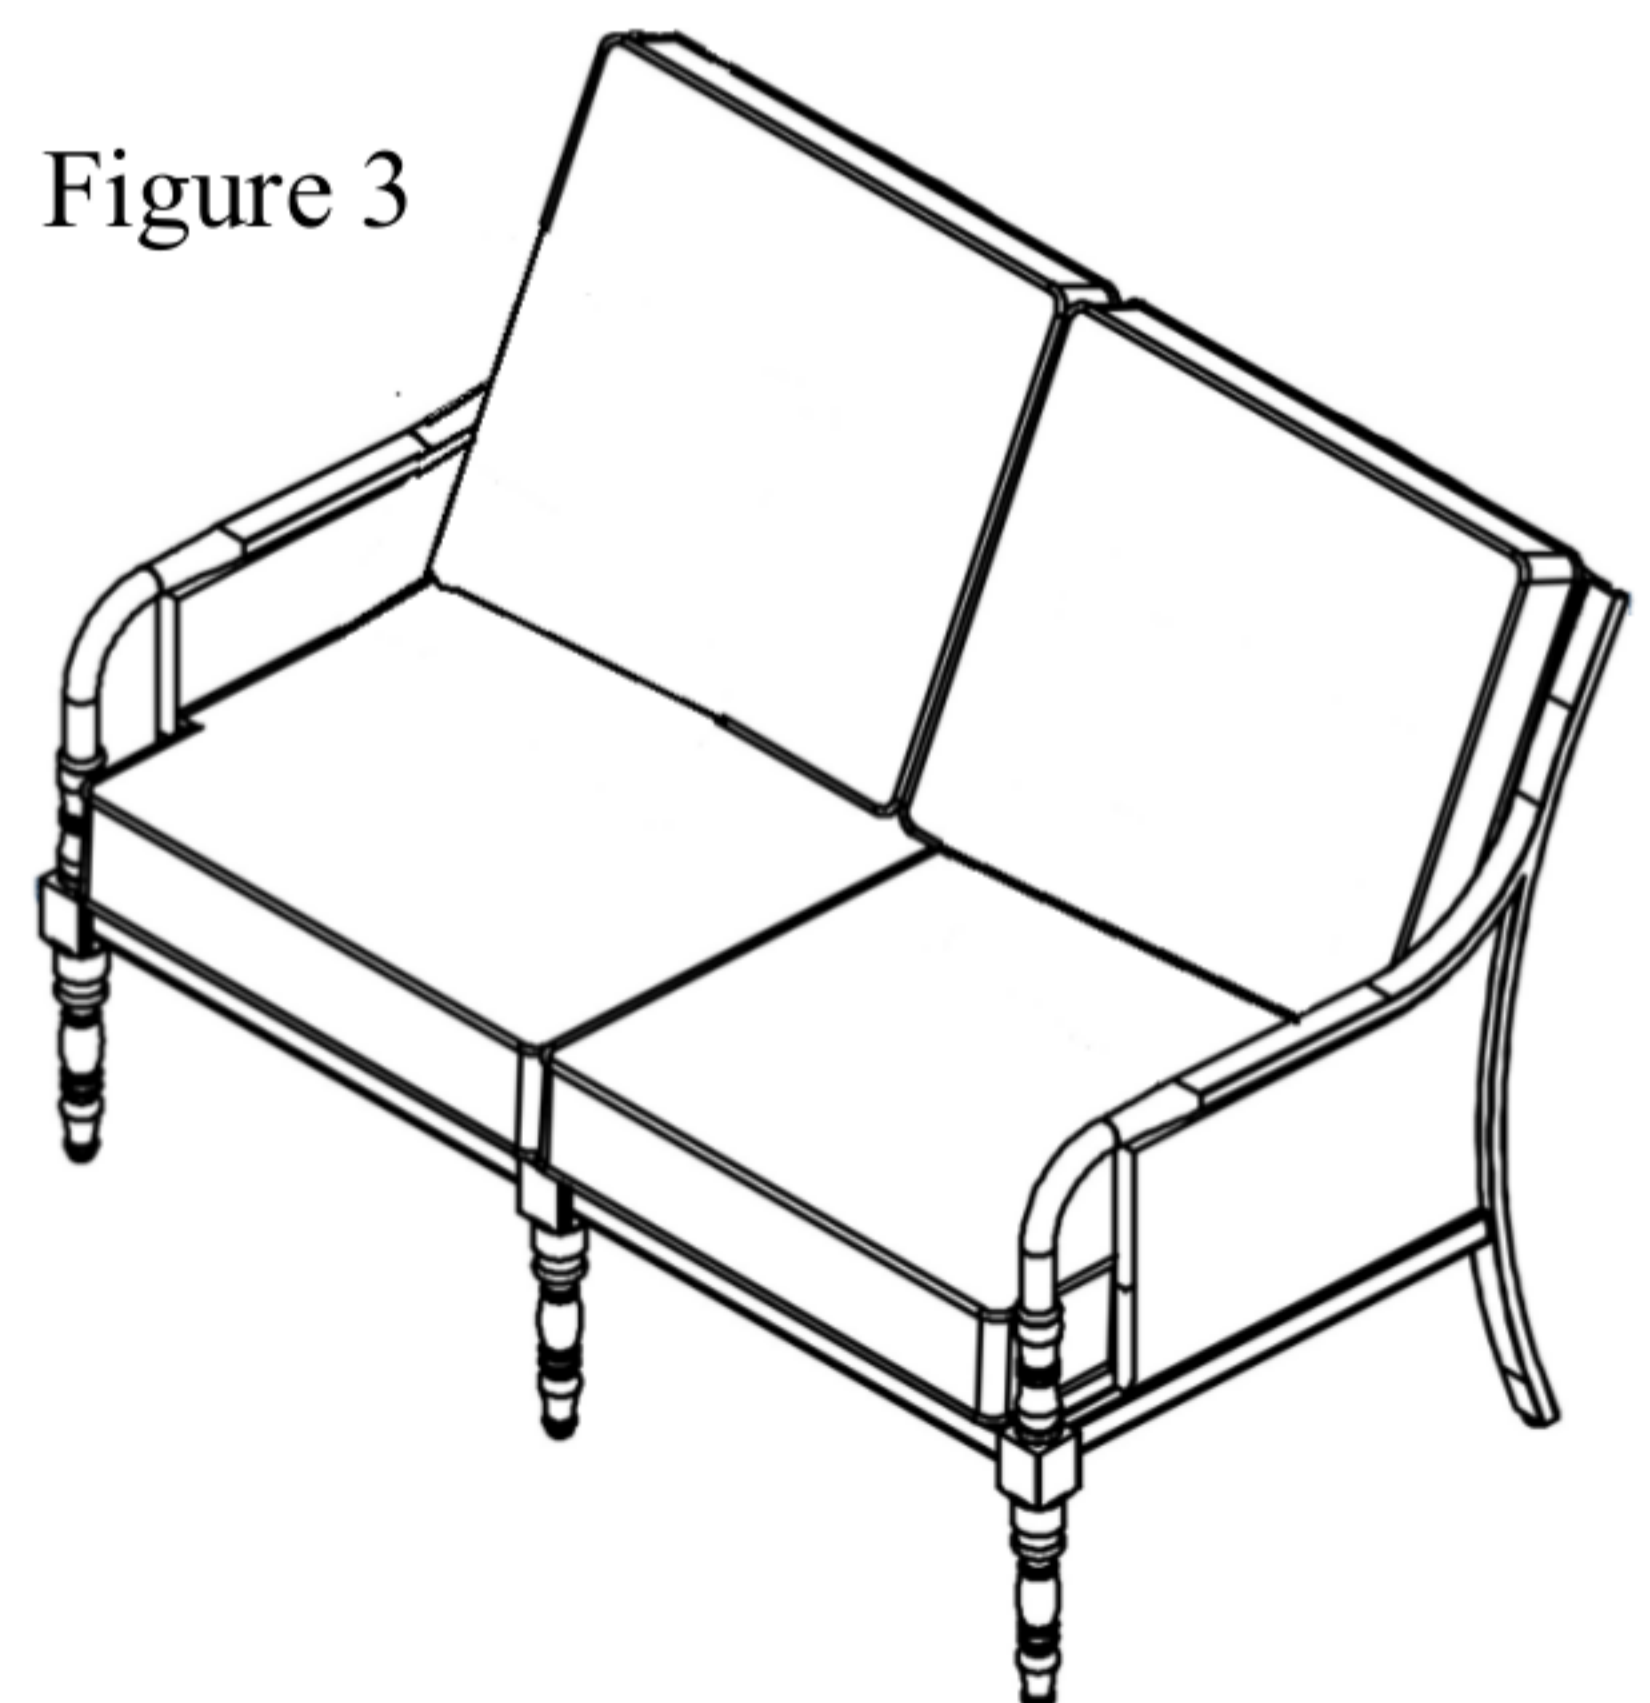


Figure 3