




## **Arabella Aluminum Swivel Rocker Dining Chair**

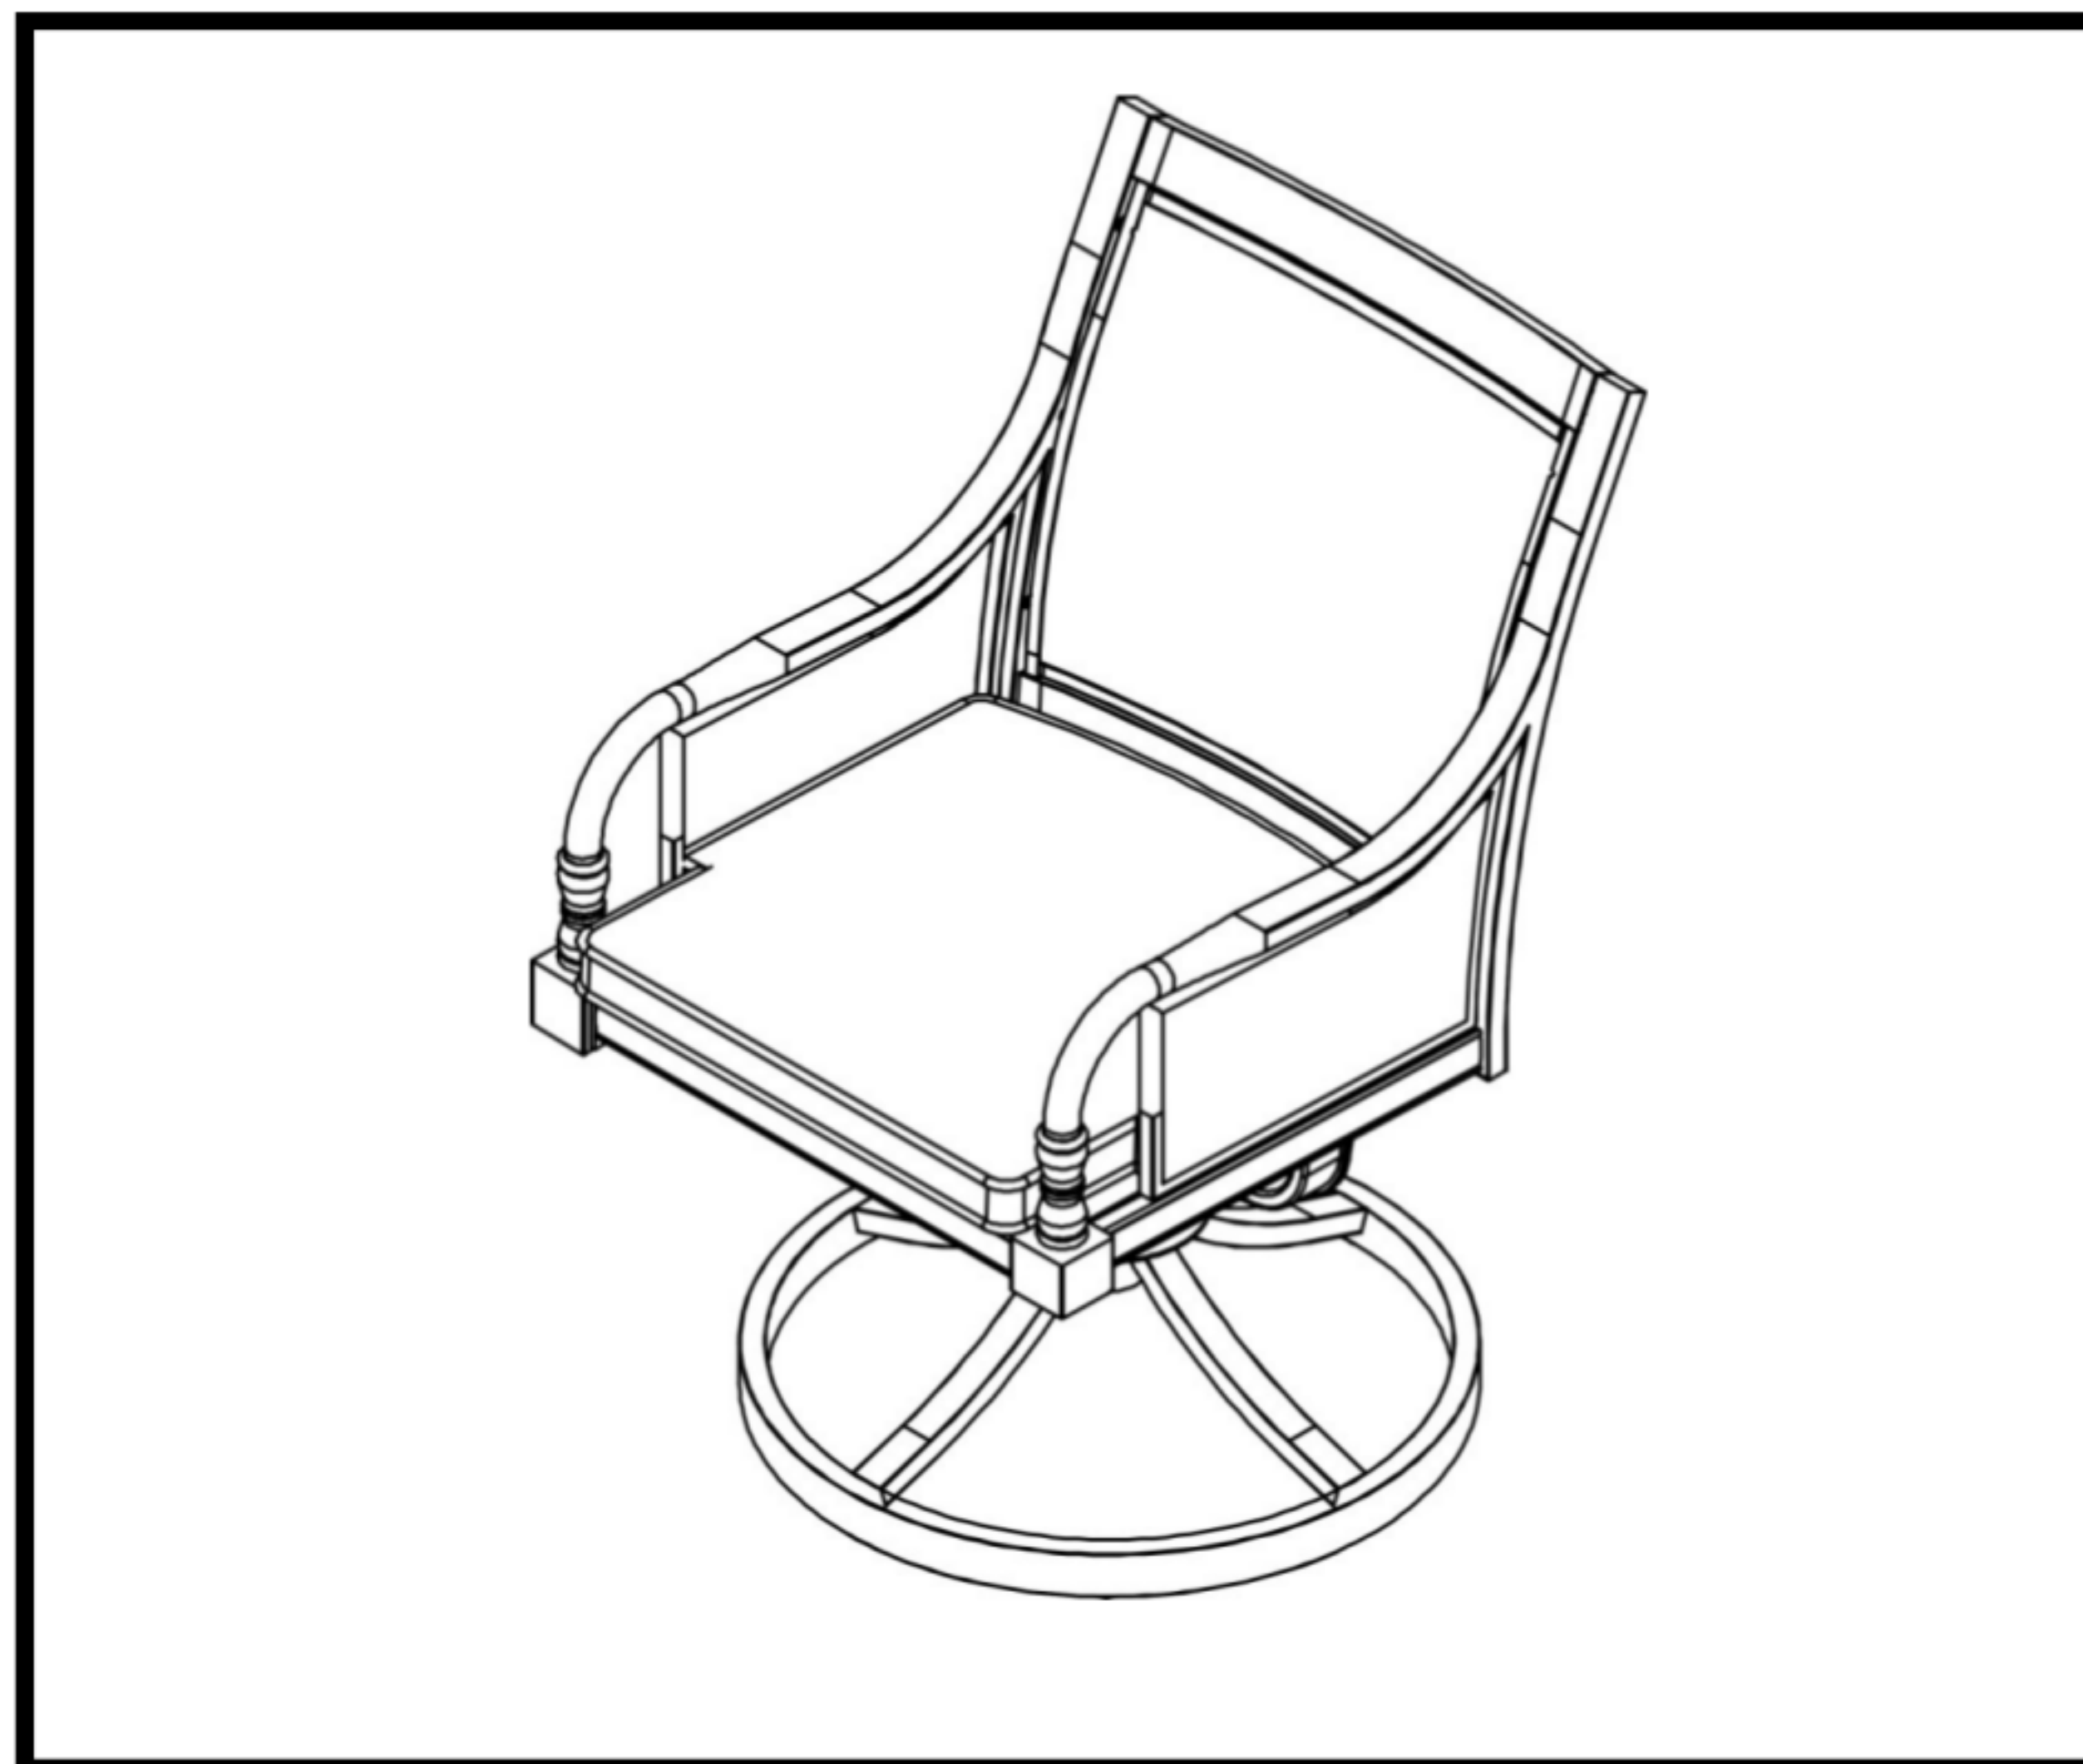

**Customer Service**

**CustomerService@ShoppersChoice.com**

Monday-Friday 7-9, Sat. 9-3, Sun. 12-6 CST

Toll Free: 1-877-743-2269


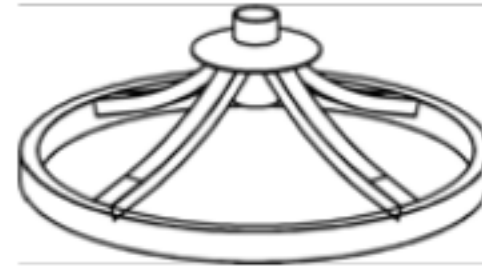








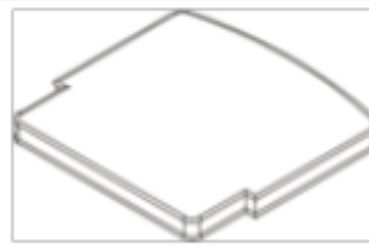

[www.ShoppersChoice.com](http://www.ShoppersChoice.com)

## WARNING

Please read instructions carefully and thoroughly before assembling. Check parts against the parts list to make sure you have all the parts needed for proper assembly. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

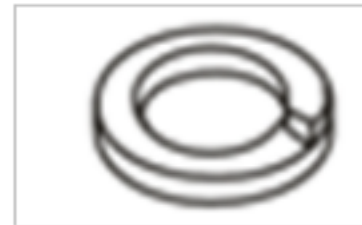**DO NOT ATTEMPT TO ASSEMBLE IF PARTS ARE MISSING OR DAMAGED. IMPROPER ASSEMBLY MAY RESULT IN DAMAGE OR SERIOUS INJURY .**  
To assemble, place the chair on a non-abrasive flat surface to prevent scratching.

## PARTS LIST

PART	DESCRIPTION	PICTURE	QTY
A	Chair seat		2
B	Chair base		2
C	T-rocker		2
D	Bolt(5/16×1.772")		8
E	Lock washer		8
F	Flat washer		16
G	Metal plate		8
H	Nut		8
I	Bolt cover		8
J	Nut cover		8
K	Seat cushion		2
L	Wrench		2



**1** Align the holes on the support bar on the underside of the chair seat (A) with the holes on the spring plates attached to the t-rocker (C). Make sure the arrow labels on the rocker mechanism and chair support bar are facing the same direction towards the front of the chair. Insert bolts (D) through flat washers (F), the metal plates (G), support bar, spring plate and the metal plates (G) as showed in the diagram. Secure bolts with flat washers (F), lock washers (E), and nuts (H). The support bar and spring plate should be sandwiched in between the metal plates (G).

Warning: Improper assembly may result in serious personal injury.

Once all the nuts and bolts are in place, securely tighten all the bolts (D) and nuts (H), including the ones at the front. Part on the rocker mechanism with the wrench (L). Cover all nuts (H) and bolts (D) with nut covers (J) and bolt covers (I).

Place the chair base (B) on a flat surface and insert the chair seat (A) with stem into the chair base. Firmly push down to lock the chair seat (A) into the chair base (B).

Test the swivel rocker gently. If the rocker does not rock properly, double check the assembly procedure.

Repeat the above steps to assemble the other chair.

