





## CRYSTAL FIRE® PLUS LINEAR ELECTRONIC IGNITION GAS FIRE PIT BURNER PLATE

42" X 24"





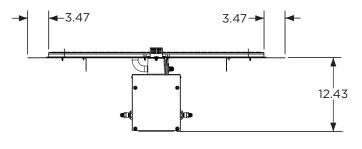



FRONT VIEW

RIGHT VIEW

| ITEM CODE     | BTU/hr. | FIRE<br>MEDIA | LENGTH (in.)<br>Packaged | WIDTH (in.)<br>Packaged | HEIGHT (in.)<br>Packaged | WEIGHT(lbs.) Packaged |
|---------------|---------|---------------|--------------------------|-------------------------|--------------------------|-----------------------|
| BP2442DSING-B | 80,000  | 20 lbs.       | 47                       | 27                      | 19                       | 60                    |
| BP2442DSILP-B | 80,000  | 20 lbs.       | 47                       | 27                      | 19                       | 60                    |

## **Technical Specifications:**

- 1. CLEARANCE TO COMBUSTIBLES
  - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials.
- 2. GAS SUPPLY
  - Natural Gas Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
  - Liquid Propane Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- 3. ELECTRICAL REQUIREMENTS
  - Readily accessible GFCI-protected outlet installed within enclosure to local or national electrical code. Weatherproof-while-in-use cover should be installed on junction box. (CF-DSI-JB is recommended)
- 4. CONTROLS
  - Included: Low-voltage three-position control switch and control panel for installation on enclosure.
  - Optional (Low-Voltage): 4-hour timer (4HRTC) for installation on enclosure, RF remote (CF-DSI-R)
  - Optional (110VAC): E-Stop (CF-ESO-CP), wall switch/E-stop combination (WSES-CP), 4-hour timer/E-stop combination (4HTES-CP). All 110VAC controls intended to control outlet to which appliance is connected.
- LISTING
  - Standard ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
  - Testing Agency Underwriters Laboratories (UL LLC)

Included Items: Switch bypass (CF-DSI-SB), control panel (CF-DSI-CP), 110VAC/3.3 VDC transformer (OGR-3V-ADP), standard fire media (CFG-D), 10' regulator hose (CF-HOSE-REG)

Optional Items: Tempered glass burner cover (1242GGC), stainless steel burner cover (SS1242BC), tempered glass wind guard (GG-1242), folding glass wind guard (FWG-1242), additional media options