SBC695OSCMTWIN



34.25" x 23.88" x 25" (H x W x D)

Outdoor/indoor commercial nitro-infused dual tap coffee dispenser for built-in or freestanding use, with complete tap kit, digital thermostat, and 304 grade stainless steel exterior

Highlights:

Commercially listed to NSF-7 standards

Flexible design allows built-in or freestanding use in 24" spaces

Commercial grade tap kit includes everything you need to serve both flat iced cold brew and creamy nitro-infused cold brew drafts

Product Features:

Dispenses both flat and nitro-infused coffee	Unique combination stout and standard tap system allows you to serve both flat iced cold brew and nitro-infused drafts from two cornelius kegs	
Commercially approved	ETL-S listed to NSF-7 commercial standards and meets UL-471 for use in foodservice settings	
Weatherproof design	Solid construction allows placement in the outdoors	
Built-in capable	Front-breathing design allows fully recessed installation under counters	
Full-sized coffee dispenser	Large interior can accept up to three cornelius kegs	
Complete tap kit	Commercial grade tap kit includes a dual tap draft tower with a standard and stout tap, Nitrogen tank, dual gauge regulator, and connections for ball lock Cornelius kegs	
Dual tap system	Twin style draft tower allows you to serve from two cornelius style kegs	
Stainless steel exterior	Door and cabinet are wrapped in 304 grade stainless steel for lasting durability in the outdoors	
Professional handle	Blade style handle in brushed stainless steel matches many popular styles of cabinetry and grill details	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com






SBC695OSCMTWIN Specifications:

Overview	
Height of Cabinet	34.25" (87 cm)
Width	23.88" (61 cm)
Depth	25.0" (64 cm)
Depth with Handle	26.88" (68 cm)
Depth with door at 90°	47.75" (121 cm)
Capacity	6.04 cu.ft. (171 L)
Defrost Type	Automatic
Door	Stainless Steel
Cabinet	Stainless Steel
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Amps	1.3
Voltage/Frequency	115 V AC/60 Hz
Weight	108.0 lbs. (49 kg)
Shipping Weight	113.0 lbs. (51 kg)
Estimated Time to Ship	3 to 5 days
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
Kegerator	
Door Swing	RHD
Reversible	Yes
Tap Kit	Yes
Height with Tap	50.38" (128 cm)
Number of Taps	2
Thermostat Type	Digital
Interior Light	Yes
Fan Type	Interior and Exterior
Refrigerant	R600a
Refrigerant Amount	1.76 oz.
High Side PSI	220.0
Low Side PSI	43.0
Inter Height	27.0" (69 cm)
Interior Width	20.38" (52 cm)
Interior Depth	21.25" (54 cm)
Compressor Step Height	5.5" (14 cm)
Compressor Step Width	9.63" (24 cm)

Compressor Step Depth	2.5" (6 cm)
Wheel Qty	4
Surface	Stainless Steel
Temperature Range	32º to 50ºF

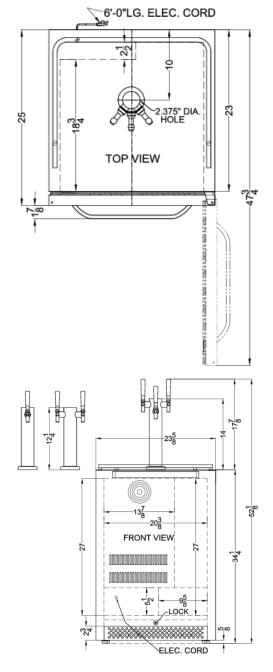

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

