


## PRODUCT SPEC SHEET CRYSTAL FIRE® PLUS LINEAR GAS FIRE PIT BURNER

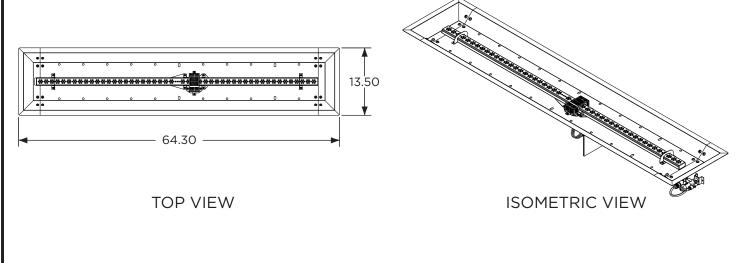





RIGHT VIEW

## FRONT VIEW

ITEM CODE	BTU/hr. (LP)	BTU/hr. (NG)	FIRE MEDIA	LENGTH (in.) Packaged	WIDTH (in.) Packaged	HEIGHT (in.) Packaged	WEIGHT(lbs.) Packaged
CFP1264-B	102,000	101,000	25 lbs.	66	16	7	50

## **Technical Specifications:**

- 1. CLEARANCE TO COMBUSTIBLES
  - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials
- 2. GAS SUPPLY
  - Natural Gas Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
  - Liquid Propane Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- 3. CONTROLS
  - Thermocouple safety valve and push-button sparker
  - Valve connected to appliance; intended for installation on enclosure
- 4. LISTING
  - Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
  - Testing Agency: Underwriters Laboratories (UL LLC)

Included Items: Manual control valve (VCSV-L), push-button sparker (CF-SPARKERZ), control panel (VCSV-CP-BLK), natural gas conversion kit, control knob and screws (BL-KNOB), standard fire media (CFG-D) Optional Items: Tempered glass burner cover (1264GGC), stainless steel burner cover (SS1264BC), tempered glass wind guard (GG-1264), additional media options