





the **outdoor**  
**greatroom**  
company


PRODUCT SPEC SHEET  
**CRYSTAL FIRE® PLUS LINEAR**  
**GAS FIRE PIT BURNER**  
96" X 12"

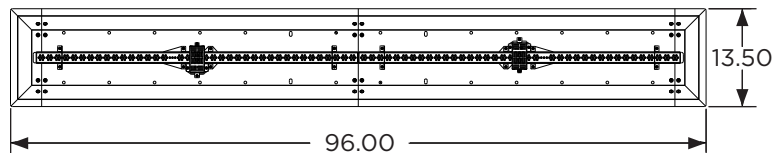


TOP VIEW

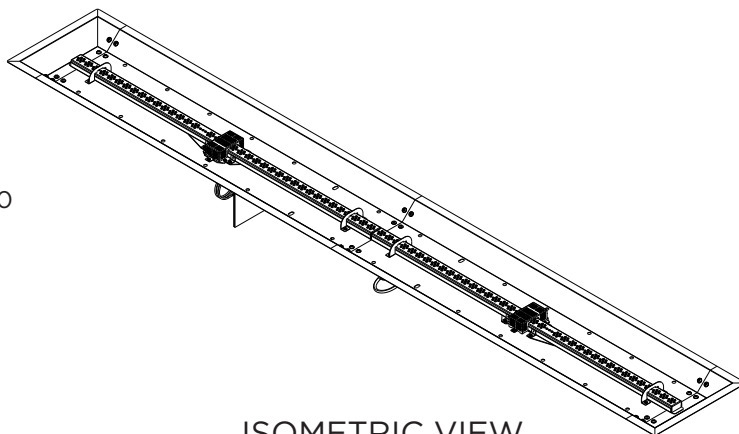

ISOMETRIC VIEW

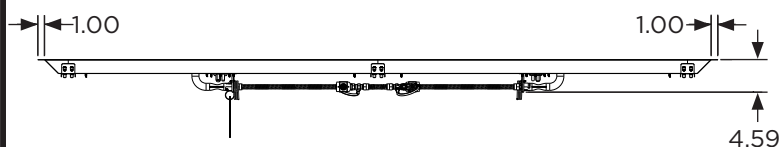

FRONT VIEW



RIGHT VIEW

| ITEM CODE | BTU/hr.<br>(LP) | BTU/hr.<br>(NG) | FIRE<br>MEDIA | LENGTH (in.)<br><i>Packaged</i> | WIDTH (in.)<br><i>Packaged</i> | HEIGHT (in.)<br><i>Packaged</i> | WEIGHT(lbs.)<br><i>Packaged</i> |
|-----------|-----------------|-----------------|---------------|---------------------------------|--------------------------------|---------------------------------|---------------------------------|
| CFP1296-B | 160,000         | 160,000         | 40 lbs.       | 66                              | 27                             | 19                              | 84                              |

### Technical Specifications:

- CLEARANCE TO COMBUSTIBLES**
  - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials
- GAS SUPPLY**
  - Natural Gas - Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
  - Liquid Propane - Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- CONTROLS**
  - Thermocouple safety valve and push-button sparker
  - Valve connected to appliance; intended for installation on enclosure
- LISTING**
  - Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
  - Testing Agency: Underwriters Laboratories (UL LLC)

**Included Items:** Manual control valve (VCSV-L), push-button sparker (CF-SPARKERZ), control panel (VCSV-CP-BLK), natural gas conversion kit, control knob and screws (BL-KNOB), standard fire media (CFG-D)

**Optional Items:** Tempered glass wind guard (GG-1296), additional media options