

SPECIFICATION SHEET



PART NAME: **RELAY**

DESCRIPTION: Hard wired, remotely operated switch

PART No: HUSA05

FREQUENCY: 902 MHz

DIMENSIONS: 2.78" x 1.65" x 1.1" (73 x 42 x 28mm)

CERTIFICATIONS: FCC SZV-STM300U (USA)
IC 5713A-STM300U (Canada)

Line Voltage: 120, 208 and 240 volts

Maximum Current:: 16 Amps

FEATURES: ON/OFF control of the heater
Timer OFF function, 15, 30, 45, 60 minutes.
Can be controlled by multiple switches and remote controls.
Adjustable antenna

NOTE: To be used with wall switch HUSA03 or HUSA04 and optional remote control HUSA06

Can be mounted inside a standard junction box, Attached using a standard knockout and thread connector with nut (included).

The Relay is to be mounted indoors only and protected from the environment.

Use a non-metal electrical enclosure for best RF transmission.


Install in a suitable location taking care with interference through walls and other obstacles.

Note: See the Product Manual for more detail

SINGLE WALL SWITCH & 1 HEATER



Wireless signal

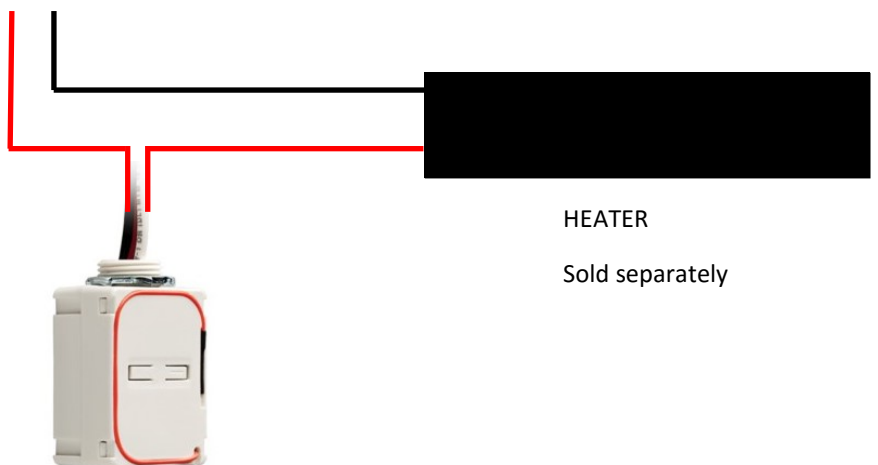

HEATER

Sold separately

SINGLE WALL SWITCH

Sold separately

RELAY

Heatstrip USA LLC.
616 Corporate Way,
1-877-222-0063 (Toll Free)
www.heatstripusa.com
info@heatstripusa.com

PMB 532,
415 Laurel St,
San Diego, CA 92101

Suite 2-5771,
Valley Cottage, NY 10989


HEATSTRIP
USA