

Cutout Specifications

GRILLS	H	W	DEPTH
MODEL	A	B	C
BLZ-3-NG/LP	8 ½	23 ¼	21 ¼
BLZ-4-NG/LP	8 ½	30 ¾	21 ¼
BLZ-5-NG/LP	8 ½	38 ¾	21 ¼
BLZ-4-CHAR	8 ½	30 ¾	21 ¼
BLZ-4LTE2-NG/LP	8 ½	30 ¾	21 ¼
BLZ-5LTE2-NG/LP	8 ½	38 ¾	21 ¼
BLZ-2PRO-NG/LP	10 ½	24 ¾	23 ¾
BLZ-3PRO-NG/LP	10 ½	32 ¼	23 ¾
BLZ-4PRO-NG/LP	10 ½	42 ½	23 ¾
BLZ-4LTE2MG-LP	8 ½	30 ¾	21 ¼

SIDE BURNERS

MODEL	A	B	C
BLZ-SBI-NG/LP	2 1/16	11 ¼	18
BLZ-SB2LTE-NG/LP	8 ½	10 ¾	20 ¾


POWER BURNERS

MODEL	A	B	C
BLZ-PBLTE-NG/LP	8	14	19 ½
BLZ-PROPB-NG/LP	9 ¼	14	19 ½

GRIDDLES

MODEL	A	B	C
BLZ-GRIDDLE-LTE-NG/LP	12	28 ½	24 ¾

ACCESSORIES	H	W	DEPTH
MODEL	A	B	C
BLZ-DDC-39"-R	19 ½	37 ¾	20 ¾
BLZ-DDC-R	19 ½	30 ¼	20 ¾
BLZ-AD25-R	18 ¼	21 ¾	
BLZ-AD32-R	18 ¼	28 ¾	
BLZ-AD40-R	18 ¼	35 ¾	
BLZ-DRWI-R	10	15 ¾	21
BLZ-DRW2-R	19 ¾	15 ¾	21
BLZ-DRW3-R	27 ¾	15 ¾	21
BLZ-TRLP-DRW	24 ¼	18 ½	15 ¾
BLZ-PTH-R	8 ¾	14 ½	8 ¾
BLZ-SV-1420-R/LH	20 ¼	14 ¼	
BLZ-SINGLE 2417-R/LH	24 ¼	17	
BLZ-SH-2014-R	14 ¼	20 ¼	
BLZ-SH-2417-R	17	24 ¼	
BLZ-TREC-DRW	24 ¾	18 1/16	23 1/8
BLZ-TRNW-DRW	24 ¾	12	18 ¾
BLZ-30W-3DRW	27 ¾	27 1/8	21
BLZ-ICEB-WH	20 ¼	20 ¼	20 ¾
BLZ-TRC-CB	5	10 ¾	10 ¾
BLZ-KMDO-SLV	33 1/16	31 ¾	29 ¾
BLZ-DRY-STG	19 ½	30 ¾	19 ¾
BLZ-30CKT-SNK	9	28 ¾	23 1/8

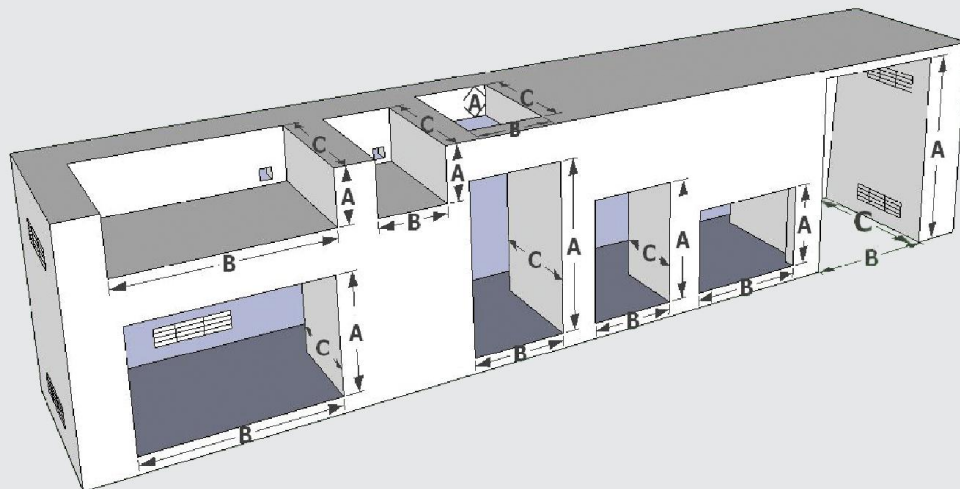


INSULATED JACKETS (OPTIONAL)

	H	W	DEPTH
MODEL	A	B	C
BLZ-3-IJ	9 ⁵ / ₈	25 ⁵ / ₁₆	22 ¹ / ₄
BLZ-4-IJ	9 ⁵ / ₈	33	22 ¹ / ₄
BLZ-5-IJ	9 ⁵ / ₈	40 ³ / ₄	22 ¹ / ₄
BLZ-2PRO-IJ	10 ³ / ₄	27 ⁵ / ₈	24 ⁷ / ₈
BLZ-3PRO-IJ	11 ¹ / ₂	34 ³ / ₄	24 ⁷ / ₈
BLZ-4PRO-IJ	10 ⁷ / ₈	45	24 ⁷ / ₈
BLZ-SB2-IJ	9 ⁵ / ₈	13	22 ¹ / ₄
BLZ-PB-IJ	9	16 ¹ / ₂	20 ⁵ / ₈
BLZ-PROB-IJ	10 ¹ / ₄	16 ¹ / ₂	20 ⁵ / ₈
BLZ-GRIDDLE-IJ	12 ³ / ₄	30 ⁵ / ₈	25

REFRIGERATOR AND TRIM KITS

MODEL	A	B	C
BLZ-SSRF130	33 ³ / ₄	21 ⁵ / ₁₆	23
BLZ-SSRF-40DH	33 ³ / ₄	21 ⁵ / ₁₆	23 ¹ / ₂
BLZ-SSRF-50DH	34 ¹ / ₂	24 ¹ / ₂	24 ¹ / ₂
BLZ-TRIMKIT-4.1/4.5	33 ³ / ₄	21 ⁵ / ₁₆	
BLZ-TRIMKIT-5.2	34 ¹ / ₂	24 ¹ / ₂	
BLZ-ICEMAKR-50GR	34	16 ⁵ / ₈	27 ⁵ / ₈
BLZ-TRIMKIT-ICEMKR	34	16 ⁵ / ₈	

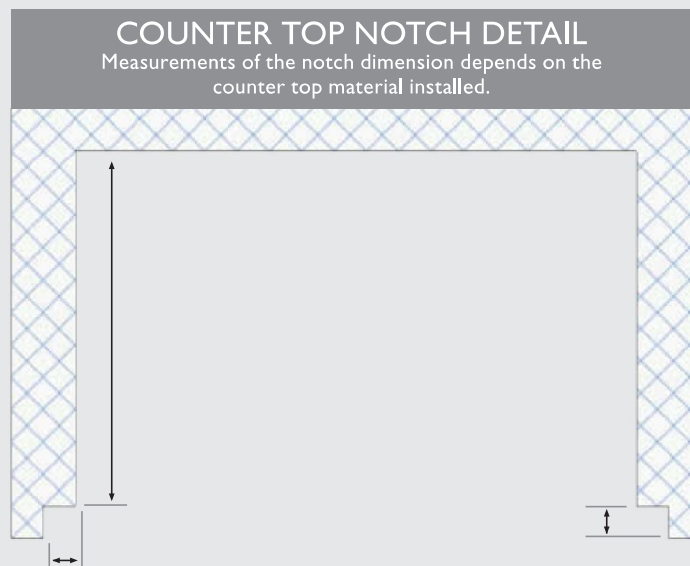

- Your application will have additional requirements, consult owner's manual for full instructions.
- Ensure your island cavity is adequately vented. Number of vents shown in diagram is for informational purposes only. Consult your local licensed professional for adequate requirements.
- Ensure your outdoor kitchen is constructed out of non-combustible materials.
- If your outdoor kitchen is constructed of combustible materials, an insulated jacket is REQUIRED.
- Cutout dimensions do not allow for lid clearance or other measurement requirements. Consult the Owner's Manual for specifics.