



FN-24/30-CHOL



CALIFORNIA PROPOSITION 65 WARNING

WARNING: This product can expose you to chemicals, including titanium dioxide, which is known in the state of California to cause cancer and lithium Carbonate, which is known in the state of California to cause birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

Note: Before stacking the logs, do so without the burner in operation and wait for all component pieces to be completely cool from any testing of the burner. Always wear protective gloves when handling the gas logs or burner components.


IMPORTANT: In the event a replacement log is needed, please reference the log breakdown below to ensure the correct log is ordered. The total length of each log is noted next to the model number at the end of these instructions for identifying each log accurately.

Note: The referenced placement of the smaller top logs can be changed to fit the preferences of the homeowner. Should this be desired, take care when restacking to allow passageways for the flame to move through the top log set. Stacking too closely together and or placing directly in the vacant space between the bottom two logs can smother the flame potentially creating venting problems and excess sooting.

WARNING: This is a vented set of gas log whose exhaust must be properly vented. Only use this vented gas log set in a fully functioning fireplace and chimney in good repair.

Parts List

A-0305



H-0540F 21"



H-0523F 13.5"



H-0524F 13.5"



H-0298F 10"



H-0535F 8.5"



H-0537F 11.5"



H-0538F 11"



H-0004F 9.5"



FN-24/30-CHOL

Instructions for 24" Configuration

Step 1: Place brick riser on grate towards back and centered left to right on the grate.



Then place back log A-0540F (largest log in the set) on top of the brick riser as shown and centered left to right on the grate.


H-0540F



Step 2: Place the left & right fronts log H-0519F & H-0357F at the front of the grate as shown below.

H-0523F


H-0524F

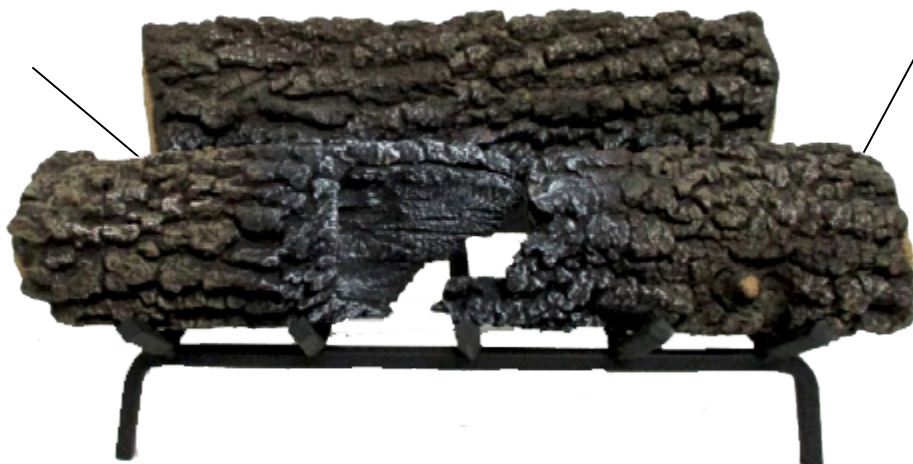

FN-24/30-CHOL

Instructions for 24" Configuration

Step 3: Place the left log H-0537F, middle log H-0298F & right log H-0538F as shown below.

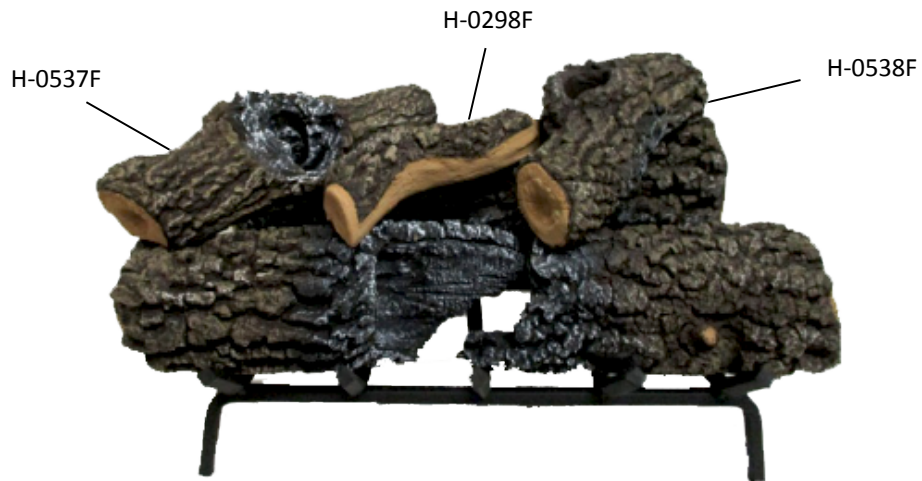

Step 4: Place logs H-0004F & H-0535F as shown below.




FN-24/30-CHOL

Instructions for 30" Configuration

Step 1: Place brick riser on grate towards back.




Then place back log A-0540F (largest log in the set) on top of the brick riser as shown below. Then place the left front log H-0519F & right front log H-0357F as shown below.

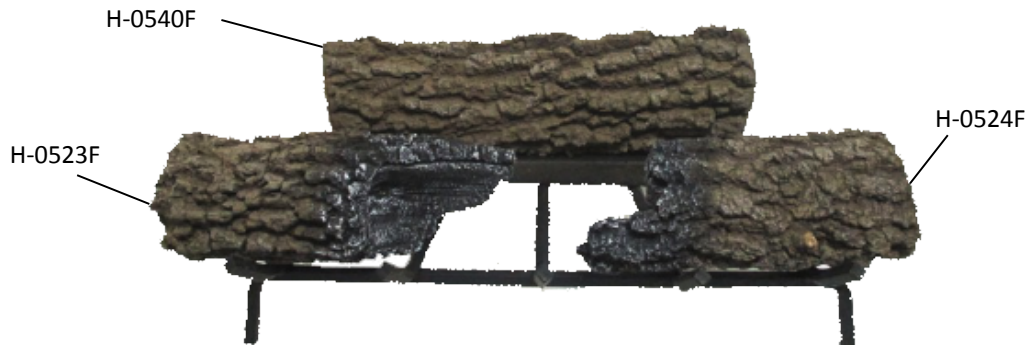

Step 2: Place log H-0004F & H-0298F as shown below.

Then, place log H-0538F as shown below. Do not place this log until the others are in place to prevent bottom logs from toppling.

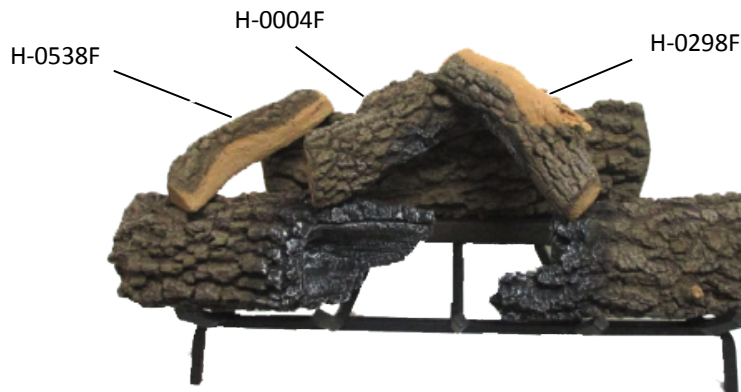

Step 3: Place logs # H-0535F & H-0537F as shown below.

