



2017 CATALOG

THE BEST ROOM IN THE HOUSE  
ISN'T IN THE HOUSE AT ALL

## OUTDOOR FIREPLACES

Kalea Bay	8
OD42	10
Key West See-Through	12

## FIRE FURNISHINGS

Key West Bistro	16
Key West Coffee Table	18

## BURNER SYSTEMS

Ignition Types	22
Listed Burners	26
Round Pan	26
Round Flat Disc	28
Square Pan	30
Linear Pan	32
Non-Listed	34
AnF Outdoor Living Enclosures	36
Burners	38

## PAVER ACCESSORIES

Flexframe Kits	42
Paver Kit Control Panels	44
Vent Kits	45

## JEWELRY

How Much Media	48
Media	50
Glass	52
Fire Pit Log Sets	54

## OPTIONAL ACCESSORIES

Controls	58
Glass Windshields	59
Lids	60
MSI Kits	61
Vent Kit	61
Hoses & Regulators	62
Key Valves	63
Valves & Fittings	64
Flex Lines	65

## DEALER TOOLS

Kiosk	66
Authorized Dealer Banner	66
Jewelry Display	67
Glass Tower	67
Glass Sample Kit	67



Firegear has partnered with CADdetails to provide you free and easy access to CAD drawings in multiple CAD and BIM formats, specifications, 3D models, product brochures, video and related documents. To access the Firegear CADdetails files, visit our home page [www.firegearoutdoors.com](http://www.firegearoutdoors.com), click on the CADdetails logo and follow the registration process.



# OUR STORY



**SKYTECH**  
PRODUCTS GROUP

In 1996, founders Chris Flick and Corbit Beasey started American Flame in Beasey's garage. Soon after, Flick and Beasey expanded their efforts with a second company, Skytech Systems. Together, the two companies established a commanding presence in the hearth industry. For more than a decade now, the families of companies are referred to as Skytech Products Group.

Flick attributes the companies' lasting success to three foundational credos:







A human being always answers the phone  
Customer service is king  
Try to ship within 24 hours

In 2013, Skytech purchased Firegear as a base for its entry into the outdoor hearth category. Skytech was convinced it could add depth and breadth to Firegear's product offering while infusing its timeless credos. Firegear continues to prove itself as a leader in the outdoor categories and has gained the trust of its customers and the respect of its peers. Manufacturers, Distributors and Dealers recognize Firegear for its product offering, knowledge base and their belief in the Skytech electronics that accompany Firegear's electronically operated systems.

Skytech Products Group continues to operate with one purpose – to provide extraordinary customer service. Our free technical support line is manned with live technicians during normal business hours. In addition to the technical support line, help videos are now available at [firegearoutdoors.com](http://firegearoutdoors.com) and [skytechpg.com](http://skytechpg.com) to assist customers on their own schedule. Please know that we are committed to serving our customers before, during and after the sale.



# ICON LEGEND

<b>BEST</b>	Thermocouple Flame Sense	 Intertek Listed	 Available in Canada
<b>BETTER</b>	Thermocouple Manual Safety	 Underwriters Laboratories Listed	 Liquid Propane
<b>GOOD</b>	Match Throw	 Available on CAD Details	 Natural Gas
			 Made in USA

# MAP POLICY

## MINIMUM ADVERTISED POLICY

Skytech Products Group-Retail, including Skytech Systems and Firegear Outdoors ("SPG-Retail"), a Division of Skytech Products Group, has developed a Minimum Advertised Pricing (MAP) policy (the "Policy") for all products sold by and purchased from SPG-Retail by and through traditional and/or online retailers ("Products"). In an effort to protect the image and value of SPG-Retail products and to maintain fair and equitable promotional and sales activity among its distributors, dealers, retailers and other resellers (each, a "Retailer"), SPG-Retail has developed the MAP Policy effective immediately. The MAP Policy and its terms and conditions are as follows:

## POLICY

Subject to certain exceptions set forth below, no Retailer shall, at any time, advertise or promote any SPG-Retail Products for sale or resale at a price lower than the MAP pricing established by SPG-Retail for such Products.

## APPLICATION

The MAP Policy shall apply to all promotions and/or advertisements of any Products purchased from SPG-Retail that appear in any media form, including, without limitation, written or electronic flyers, posters, coupons, mailers, inserts, newspapers, magazines, catalogs, mail order catalogs, Internet, online, or similar electronic media, websites, email newsletters, email solicitations, television, radio, and/or public signage. The MAP Policy shall not apply to (a) any in-store advertising displayed by a Retailer, in-store displays, point-of-sale signs, hang tags or bar codes, or similar product price packaging which merely state the price of such product; (b) the promotion or advertisement of discontinued Product, so long as such Product is clearly marked as discontinued within said advertisement or promotion; and (c) the actual price at which any Products are sold to an individual consumer at or from a Retailer's physical location or via telephone.

## OTHER TERMS & CONDITIONS

MAP pricing is subject to change from time to time at the sole discretion of SPG-Retail and can be accessed by contacting SPG-Retail Divisions at (888) 672 8929, or by written request via email at [skytechii@skytechpg.com](mailto:skytechii@skytechpg.com) or [info@firegearoutdoors.com](mailto:info@firegearoutdoors.com). It shall be the responsibility of all Retailers to remain current as to MAP Policy, pricing, and any changes thereto.

The MAP Policy shall apply to all Products sold to SPG-Retail distributors and resold thereby to any Internet or online dealers and retailers, and such distributors shall take all necessary steps to enforce the MAP Policy in connection with each and every such resale.

By accepting Products from SPG-Retail and in consideration of continued access to Products and the benefits realized as an SPG-Retail preferred, approved Retailer, each Retailer accepts and all Products they purchase from SPG-Retail shall be and remain subject to the MAP Policy as set forth herein. Should it be determined that any Product subject to the MAP Policy is or has been advertised or promoted at a price below the MAP pricing established for said Product by SPG-Retail at any time, the violating Retailer shall immediately take all steps necessary to cure said violation and bring its advertising, promotion, pricing and sales activity into compliance with the MAP Policy. SPG-Retail hereby, at any time, reserves the right to discontinue the shipment of Products to the violating Retailer and/or its distributor, and the right to terminate future sales of Products to said violating Retailer and/or its distributor, subject to the parties' respective financial and confidential obligations that shall survive such termination.







# OUTDOOR FIREPLACES








# KALEA BAY

## SERIES OF OUTDOOR LINEAR FIREPLACES

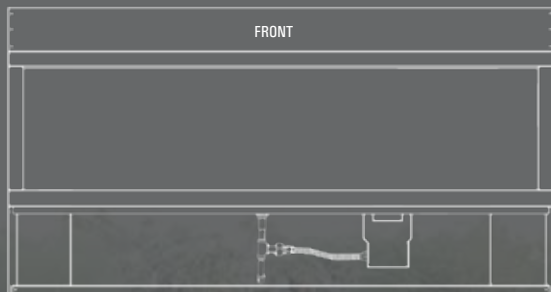

### FEATURES



- One fireplace single sided or see-through fireplace (convert to a see-through fireplace by simply removing the back panel and installing the additional windshield clips and windshield included from the factory)
- Clean contemporary outdoor linear gas fireplace, no chimney or venting required
- Firebox and burner assembly constructed of corrosion resistant 304 Stainless Steel
- Drop-in burner system for ease of installation and serviceability
- Available in four (4) opening sizes: 36" x 16" / 48" x 16" / 60" x 16" / 72" x 16" (actual opening)
- TFS (Thermocouple Flame Sense) battery operated electronic ignition system
- Includes On/Off/High/Low remote control (RCAF-3)
- Tempered glass windshield included to protect the flame in windy conditions
- Available in Natural Gas (NG) or Liquid Propane (LP) models
- Optional controls include wireless timer, wireless wall on/off switch, wireless wall high/low wall controls, wired switch and home/pool automation system capabilities
- Warranty: Five (5) year on stainless steel components. Two (2) year on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts
- Tested and approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- Each Kalea Bay includes two (2) 12" x 6" vents to provide the required 18 square inches of cross ventilation

### MODELS

Lava Rock and/or Glass is required to operate the burner. See owners manual.

OFP-36LTFS-N / P	Kalea Bay Linear Outdoor Fireplace- 36" w x 16" h x 16" d Opening Dimensions – Constructed of weather resistant 304 Stainless Steel Firebox and Burner, TFS (Thermocouple Flame Sense) Battery Operated Electronic Ignition System, On/Off/High/Low Remote Control included. Converts to See-Through Fireplace by removing back panel. Must order gas specific Natural Gas (31,000 Btu on High, 18,500 Btu on Low) Liquid Propane (30,000 Btu on High, 19,500 Btu on Low)
OFP-48LTFS-N / P	Kalea Bay Linear Outdoor Fireplace- 48" w x 16" h x 16" d Opening Dimensions – Constructed of weather resistant 304 Stainless Steel Firebox and Burner, TFS (Thermocouple Flame Sense) Battery Operated Electronic Ignition System, On/Off/High/Low Remote Control included. Converts to See-Through Fireplace by removing back panel. Must order gas specific Natural Gas (43,500 Btu on High, 24,500 Btu on Low) Liquid Propane (42,500 Btu on High, 29,000 Btu on Low)
OFP-60LTFS-N / P	Kalea Bay Linear Outdoor Fireplace- 60" w x 16" h x 16" d Opening Dimensions – Constructed of weather resistant 304 Stainless Steel Firebox and Burner, TFS (Thermocouple Flame Sense) Battery Operated Electronic Ignition System, On/Off/High/Low Remote Control included. Converts to See-Through Fireplace by removing back panel. Must order gas specific Natural Gas (50,000 Btu on High, 36,000 Btu on Low) Liquid Propane (50,000 Btu on High, 36,000 Btu on Low)
OFP-72LTFS-N / P	Kalea Bay Linear Outdoor Fireplace- 72" w x 16" h x 16" d Opening Dimensions – Constructed of weather resistant 304 Stainless Steel Firebox and Burner, TFS (Thermocouple Flame Sense) Battery Operated Electronic Ignition System, On/Off/High/Low Remote Control included. Converts to See-Through Fireplace by removing back panel. Must order gas specific Natural Gas (65,000 Btu on High, 42,000 Btu on Low) Liquid Propane (60,000 Btu on High, 45,000 Btu on Low)

### OPTIONAL ACCESSORIES

326-930	Driftwood six (6) piece twig set
TM-R-AF1TX	Wireless wall mount timer (30/60/120min)
1322WT	Wireless Wall Mount On/Off/High/Low Transmitter
1001D-AF1TX	Wireless wall mount switch (On/Off)
WS	Wired wall mount switch (On/Off)
AF-4000ADP24(80)	110 volts AC adapter, converts to 7.5 DC volts for TFS systems
AF-4000HAT	Home/Pool automation transmitter system (works with most manufacturers systems)



FOR OUTDOOR USE ONLY!



2" TRIM REVEALED




ON/OFF/HIGH/LOW  
REMOTE INCLUDED





# OD42

## OUTDOOR FIREPLACE

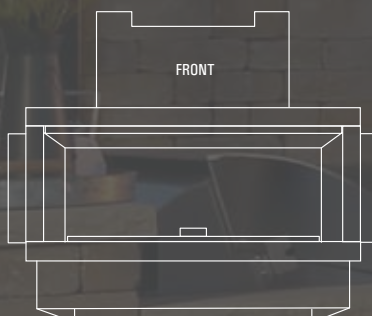

### FEATURES



- 42" Stainless Steel Firebox with Reflective Panels
- 30" Stainless Steel Burner comes with Copper Reflective Fireglass
- Viewing window is 35 1/4" x 12 3/4"
- Clean contemporary outdoor linear gas fireplace, no chimney or venting required
- Battery Operated Electronic Ignition with Safety Valve. The Safety Valve will turn the gas OFF in case of flame loss
- Includes On/Off Switch
- A Tempered Glass Windshield is included to protect the flame in windy conditions
- Available with your choice of a 2" or 4" Brushed Stainless Steel Faceplate
- Includes Weather Cover to protect your fireplace when not in operation
- Natural Gas and Propane models available - 44,500 Btu Natural Gas / 43,500 Btu Propane
- Warranty: Five (5) year on stainless steel components. Two (2) year on gas valve, electronic components and pilot igniter system. Commercial Applications: One (1) year warranty on all parts
- Tested to CAN/CGA-2.17-M91 / IAS 4-96 (US) / CGA CR97-003 (CAN) 4001172

### MODELS

- |          |   |
|----------|---|
| OD42-N   | Outdoor Linear Fireplace includes 2" Brushed Stainless Steel Faceplate, Copper Reflective Glass, Weather Cover, Wall Switch - Natural Gas |
| OD42-P   | Outdoor Linear Fireplace includes 2" Brushed Stainless Steel Faceplate, Copper Reflective Glass, Weather Cover, Wall Switch - Propane     |
| OD42-4-N | Outdoor Linear Fireplace includes 4" Brushed Stainless Steel Faceplate, Copper Reflective Glass, Weather Cover, Wall Switch - Natural Gas |
| OD42-4-P | Outdoor Linear Fireplace includes 4" Brushed Stainless Steel Faceplate, Copper Reflective Glass, Weather Cover, Wall Switch - Propane     |

### OPTIONAL ACCESSORIES

- |               |   |
|---------------|---|
| 326-900       | Steel stud framing kit. Overall dimensions 60" wide x 20" deep x 52 1/2" high |
| 326-930       | Driftwood six (6) piece twig set  |
| 1001-A        | Wireless hand held remote (On/Off)  |
| VENT-KIT-6X12 | Includes two (2) 6" tall x 12" wide vents with mounting screws                |







FOR OUTDOOR USE ONLY!





# KEY WEST SEE-THROUGH

## OUTDOOR SEE-THROUGH FIREPLACE

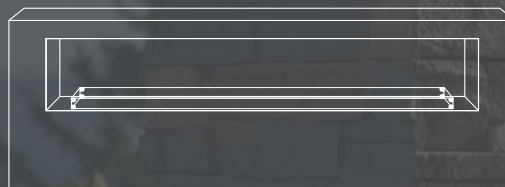

### FEATURES: KWST 42



- Steel Stud Framing Kit (KD - Knock Down) with Stainless Steel Reflective Side Walls and Ceiling Panels
- Overall Dimensions: 64 1/16" Wide x 51" Tall x 19" Deep
- Viewing window: 42" Wide x 20 7/16" Tall
- FPB-30LTFS-N or FPB-30LTFS-P Stainless Steel Burner with Fireglass
- Battery operated Thermocouple Flame Sense "TFS" Electronic Ignition System features a safety shut OFF in case of loss of flame and auto re-light
- Includes On/Off/High/Low remote control (RCAF-3)
- Natural Gas & Propane models available
- 30% to 50% turn down from high to low - Natural Gas (42,000 Btu on High, 23,000 Btu on low) Propane (42,000 Btu on high, 30,000 Btu on low)
- Optional controls include wireless timer, wireless wall on/off switch, wireless wall high/low wall controls and wireless switch
- Warranty: Five (5) year on stainless steel components. Two (2) year on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty
- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories

### FEATURES: KWST 82



- Unfinished Enclosure (assembled) with a 6" x 12" Vent Kit included
- Overall dimensions: 102" Wide x 54 1/2" Tall x 24" Deep
- Viewing window: 81 1/2" Wide x 19 1/2" Tall
- Two (2) FPB-30LTFS-N or two (2) FPB-30LTFS-P Stainless Steel Burner with Fireglass
- Battery operated Thermocouple Flame Sense "TFS" Electronic Ignition System features a shut OFF in case of loss of flame and auto re-light
- Includes On/Off/High/Low remote control (RCAF-3)
- Natural Gas & Propane models available
- 30% to 50% turn down from high to low - Natural Gas (84,000 Btu on High, 46,000 Btu on low) Propane (84,000 Btu on high, 60,000 Btu on low)
- Optional controls include wireless timer, wireless wall on/off switch, wireless wall high/low wall controls and wireless switch
- Warranty: Five (5) year on stainless steel components. Two (2) year on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty
- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories

## MODELS

KWST-42-N	FPB-30LTFS-N or P, Steel Stud Framing Kit (KD - Knock Down) Ready to assemble, pre-drilled and labeled. Stainless Steel Reflective Side Walls and Ceiling Panel, Fireglass (10lb.), GWS-3810 Glass Windshield, On/Off/High/Low Remote Control (RCAF-3), VENT-KIT-6X12
KWST-42-P	
KWST-82-N	Two (2) FPB-30LTFS-N or P, Ready to Finish Enclosure (Assembled), Fireglass (20lb.), GWS-6810 Glass Windshield, On/Off/High/Low Remote Control (RCAF-3), VENT-KIT-6X12
KWST-82-P	

## OPTIONAL ACCESSORIES

377-909	Key West See Through kit propane drawer kit (KWST-42-N only)
326-930	Driftwood six (6) piece twig set
TM-R-AF1TX	Wireless wall mount timer (30/60/120min)
1322WT	Wireless Wall Mount On/Off/High/Low Transmitter
1001D-AF1TX	Wireless wall mount switch (On/Off)
WS	Wired wall mount switch (On/Off)
AF-4000ADP24(80)	110 volts AC adapter, converts to 7.5 DC volts for TFS systems
AF-4000HAT	Home/Pool automation transmitter system (works with most manufacturers systems)
LID-30L	Linear stainless steel lid with brushed finish for the KWST-42
LID-68L	Linear stainless steel lid with brushed finish for the KWST-82

Lava Rock and/or Glass is required to operate the burner. Please see page 50 - 52 for options







# FIRE FURNISH





# INGS



# KEY WEST BISTRO

FIRE FURNISHING FOR OUTDOOR LIVING



## FEATURES



- The base of the Bistro Fire Table is finished with an Iron Grey ultraviolet powder coating
- Table measures 24 5/8" Tall (floor to top), Top measures 35 7/8" Square with Mitered Corners
- Choice of Iron Grey or Stainless Steel Top
- 35,000 Btu, operates on an 20 lb. Propane Tank hidden inside the table (tank sold separately)
- Match Light Ignition with Safety Valve that turns the gas supply off in case of flame loss
- Dining Leaf insert included, matches top color, creates a flat surface when optional Glass Windshield is removed
- Ships as Propane, Natural Gas Conversion Kit available (376-968)
- Tested and Listed by Intertek for installation in USA and Canada
- Five (5) Year Limited Lifetime Warranty

Glass is required to operate the burner. Please see page 50 - 52 for options

## TABLE TOPS



IRON GREY - KWBTO-L/IG



STAINLESS STEEL - KWBTO-L/SS

## MODELS

KWBTO-L/IG

Key West Bistro Table with Iron Grey Base and Top, KWBTO-L, 286-924 Iron Grey Top, 34,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately).

KWBTO-L/SS

Key West Bistro Table with Iron Grey Base and Stainless Steel Top, 286-927 Stainless Steel Top, 34,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately).

## OPTIONAL ACCESSORIES

- |         |  |
|---------|--|
| 286-968 | Key West Bistro Table Natural Gas conversion kit   |
| 326-930 | Driftwood six (6) piece twig set   |
| 286-932 | Tempered Glass Windshield (14 1/2" Long x 14 1/2" Wide x 6" Tall) Black Polyester Cover included |
| 286-938 | Protective Weather Cover   |




FOR OUTDOOR USE ONLY!



# KEY WEST COFFEE TABLE

FIRE FURNISHING FOR OUTDOOR LIVING

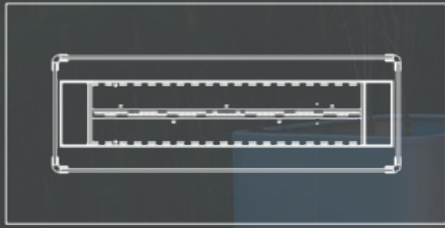

## FEATURES




- The base of the Coffee Fire Table is finished with a Sunset Bronze ultraviolet powder coating
- Table measures 19 1/4" Tall (floor to top) - Top measures 48" Length x 24" Width
- Choice of Stainless Steel or Sunset Bronze Top
- 49,000 Btu, operates on an 11 lb. Propane Tank hidden inside the table (tank sold separately)
- Battery Operated Electronic Ignition System with Safety Valve that turns off the gas supply in case of flame loss
- Dining Leaf insert included, matches top color, creates a flat surface when optional Glass Windshield is removed
- Ships as Propane, Natural Gas Conversion Kit available (376-968)
- Tested and Listed by Intertek for installation in USA and Canada

Glass is required to operate the burner. Please see page 50 - 52 for options

## TABLE TOPS



STAINLESS STEEL - KWCH-P-SS

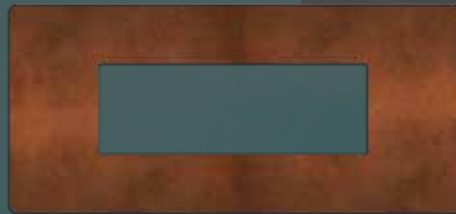

SUNSET BRONZE - KWCH-P-BR

## MODELS

KWCH-P-SS

Key West Coffee Table with Stainless Steel Top, KWCH-L1, 377-927 Table Top, 49,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately).

KWCH-P-BR

Key West Coffee Table with Sunset Bronze Top, KWCH-L1, 377-926 Table Top, 49,000 Btu Liquid Propane. Requires 10 lbs. of Fireglass (sold separately).

## OPTIONAL ACCESSORIES

- |          |  |
|----------|--|
| 376-968  | Natural Gas conversion kit for Key West Coffee Table (KWCH-P-SS & KWCH-P-BR), 50,000 BTU |
| 326-930  | Driftwood six (6) piece twig set   |
| GWS-3810 | Tempered Glass Windshield (38" Long x 12 7/8" Wide x 7 1/2" Tall)                        |
| 377-938  | Protective Weather Cover for Key West Coffee Table                                       |



FOR OUTDOOR USE ONLY!



# BURNER SYS





# SYSTEMS



# IGNITION TYPE

## MATCH THROW

### (MT)



## HOW TO LIGHT

1. Insert key into shut-off valve and secure key onto square end of the valve.
2. Light a long match or Butane lighter and hold it near the burner.
3. Turn the key counter-clockwise on gas valve (until it stops) to allow gas to flow and simultaneously apply the long burning match or Butane lighter as close to the end of the burner as possible.
4. Gas should ignite within ten (10) seconds or less. If fire pit does not light within ten (10) seconds turn key clockwise to turn OFF the gas supply. Ensure there is not too much media on top of the burner that might inhibit gas flow and try again in 5-minutes.

## FEATURES

GOOD   

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- Pans Available in Round, Square and Flat Disc Configurations in a Variety of Sizes
- Warranty: Five (5) year on stainless steel components. Two (2) year on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts
- Optional Accessory: Manual Spark Igniter "MSI" Kit featuring Piezo Ignition (MSI-BSMTI)


Lava Rock and/or Glass is required to operate the burner. Please see page 50 - 52 for options



# IGNITION TYPE

# THERMOCOUPLE MANUAL SAFETY

## (TMS)

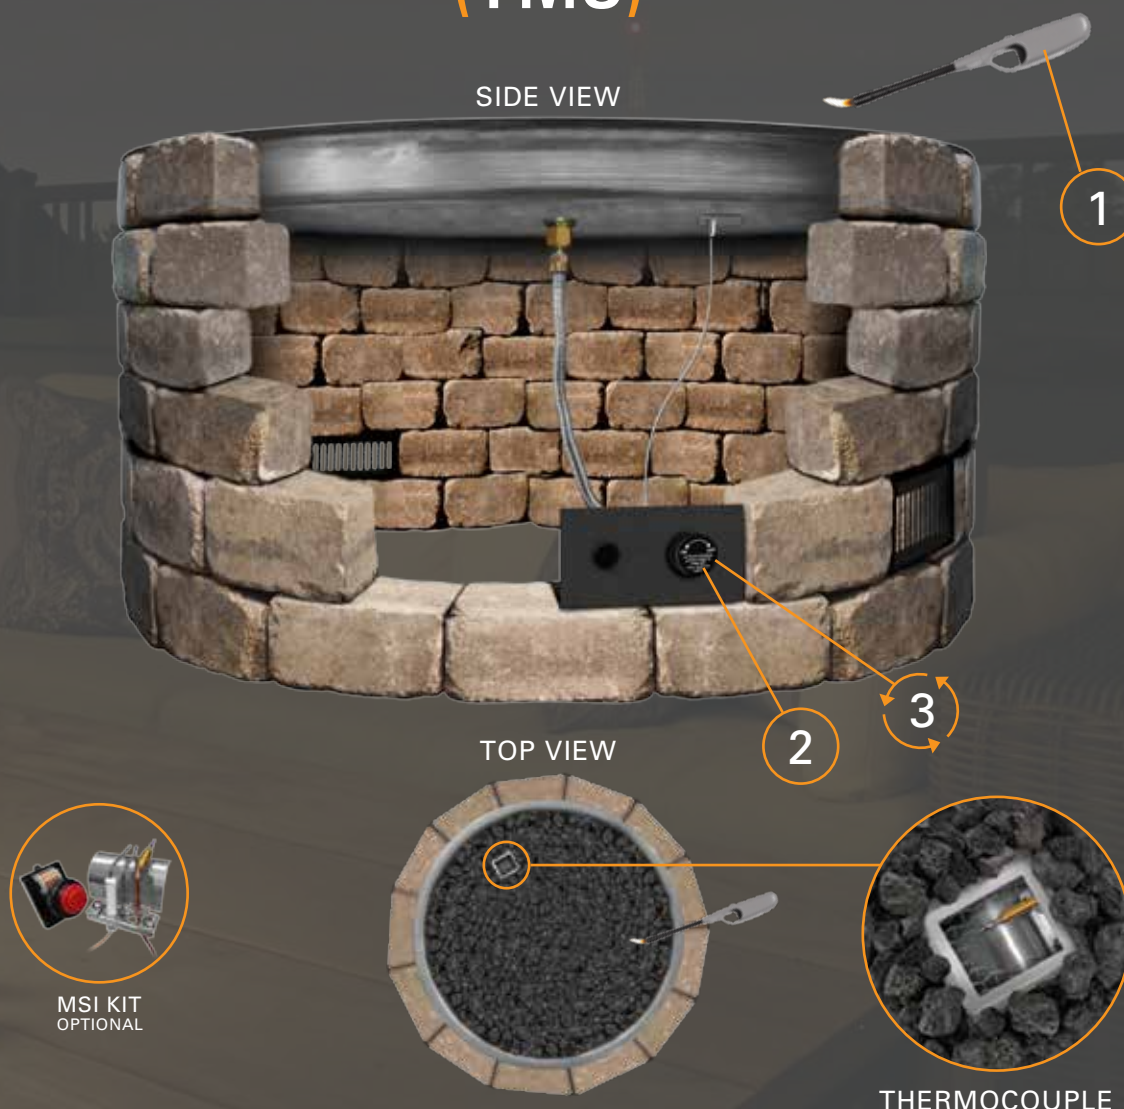

## HOW TO LIGHT

1. Light a long match or Butane lighter and hold it near the burner.
2. Rotate the control knob of the gas valve counter-clockwise to the ON position.
3. Depress control knob inward and push to light the burner at the same time.
4. After the fire pit lights continue to depress the control knob for thirty (30) seconds then release knob. If the fire pit does not light within thirty (30) seconds, release knob, turn knob clockwise to turn OFF and wait 5 minutes before trying again.

## FEATURES

BETTER



- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- Thermocouple Manual Safety TMS Technology
- Safety Valve turns gas OFF when flame goes out
- Robust Ignition System With Full Btu Output
- Pans Available in Round, Square and Flat Disc Configurations in a Variety of Sizes
- Warranty: Five (5) year on stainless steel components. Two (2) year on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts
- Optional Accessory: Manual Spark Igniter "MSI" Kit featuring Piezo Ignition (MSI-BSTMS)

Lava Rock and/or Glass is required to operate the burner. Please see page 50 - 52 for options

# IGNITION TYPE

# THERMOCOUPLE FLAME SENSE

## (TFS)

SIDE VIEW



1

TOP VIEW



IGNITER & THERMOCOUPLE



AF-4000ADP24(80)  
OPTIONAL

## HOW TO LIGHT

1. Press the ON button on the hand-held remote transmitter. You will hear the igniter probe begin sparking for fifteen (15) seconds and the fire pit will ignite.
2. If the fire pit does not light the module will start to "beep" one time every second indicating an ignition error. If this occurs press the OFF button on the transmitter and repeat step 1.
3. If fire pit does not light after second try, turn main gas OFF, wait five (5) minutes and repeat steps 1-3.

## FEATURES

BEST



- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- Thermocouple Flame Sense TFS technology with Reliable Direct Spark Ignition (Non Piloted version)
- Battery Operated Electronic Ignition with Safety Valve
- Pans Available in Round, Square and Flat Disc Configurations in a Variety of Sizes
- Ignition System features automatic re-light
- Robust Ignition System with full Btu output
- Includes On/Off/High/Low Remote Control (RCAF-3TX)
- 40% - 50% Turn Down From High to Low (varies by model)
- Warranty: Five (5) year on stainless steel components. Two (2) year on gas valve, electronic components and pilot igniter assembly. Commercial Applications: One (1) year warranty on all parts
- Optional Accessory: A/C adapter for continuous power (AF-4000ADP24[80]) (Pictured above)

Lava Rock and/or Glass is required to operate the burner. Please see page 50 - 52 for options



## TFS ADVANTAGES



The outdoor fire pit industry's only battery operated electronic ignition system

Can be operated by up to three (3) optional controls at the same time

Optional A/C adapter for continuous power when needed

Home / Pool automation system friendly, using the optional AF-4000HAT

## USING THE AF-4000HAT TO CONNECT TO YOUR EXISTING HOME/POOL SYSTEM

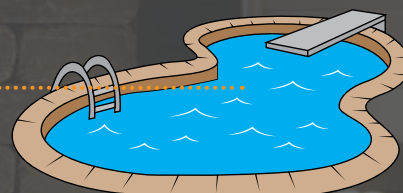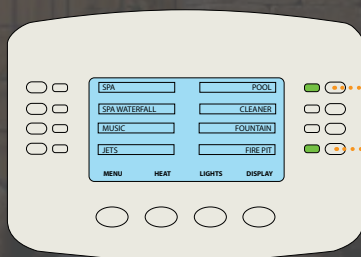

WIRED

WIRED

This is Firegear's Home/Pool Automation Transmitter. It allows you to operate your Firegear TFS product from the same controller you're used to using your pool system. It's important to note that even though you are using the HAT, you can still use your original remote that came with your TFS unit.



AF-4000HAT

WIRELESS



## OPTIONAL CONTROLS FOR THE TFS SYSTEM



1332WT



TM-R-AF1TX



WS



1001D-AF1TX



# ROUND PAN

BURNER SYSTEMS TESTED & LISTED BY UNDERWRITERS LABORATORIES

## ROUND STAINLESS STEEL TFS BURNER SYSTEMS

BEST



FPB-19RBSTFS-N	19" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TFS Electronic Ignition, for Natural Gas, 80,000 Btu on High, 45,000 Btu on Low
FPB-25RBSTFS-N	25" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low
FPB-29RBSTFS-N	29" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low
FPB-33RBSTFS-N	33" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low
FPB-19RBSTFS-P	19" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 79,000 Btu on High, 47,400 Btu on Low
FPB-25RBSTFS-P	25" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low
FPB-29RBSTFS-P	29" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low
FPB-33RBSTFS-P	33" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low



## ROUND STAINLESS STEEL TMS BURNER SYSTEMS

BETTER



FPB-19RBSTMS-N	19" Stainless Pan with Stainless Steel 16" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu
FPB-25RBSTMS-N	25" Stainless Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu
FPB-29RBSTMS-N	29" Stainless Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu
FPB-33RBSTMS-N	33" Stainless Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu



## ROUND STAINLESS STEEL MT BURNER SYSTEMS

GOOD



FPB-16RBSMT-N	16" Stainless Pan with 12" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 45,500 Btu
FPB-19RBSMT-N	19" Stainless Pan with 16" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu
FPB-25RBSMT-N	25" Stainless Pan with 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu
FPB-29RBSMT-N	29" Stainless Pan with 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu
FPB-33RBSMT-N	33" Stainless Pan with 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu



Lava Rock and/or Glass is required to operate the burner. Please see page 50 - 52 for options





## TFS OPTIONAL ACCESSORIES

WS	Wired wall mount switch (On/Off)
TM-R-AF1TX	Wireless wall mount timer (30/60/120min)
1001D-AF1TX	Wireless wall mount switch (On/Off)
1322WT	Wireless Wall Mount On/Off/High/Low Transmitter
AF-4000ADP24(80)	110 volts AC adapter, converts to 7.5 DC volts for TFS systems
AF-4000HAT	Home/Pool automation transmitter system (works with most manufacturers systems)
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws
LIDS	Stainless Steel lids with brushed finished available on page 60
WINDSHIELDS	Tempered glass windshields available on page 59

## TMS OPTIONAL ACCESSORIES

LPK#41	Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-19,25/29/33RBSTMS-N
MSI-BSTMS	Manual Spark Ignition Kit for FPB Series TMS Systems featuring the Burning Spur. Kit Includes: Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition wiring, AAA Battery
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws
LIDS	Stainless Steel lids with brushed finished available on page 60
WINDSHIELDS	Tempered glass windshields available on page 59

## MT OPTIONAL ACCESSORIES

LPK#47	Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-16RBSMT-N, 45,000 Btu
LPK#41	Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-19/25/29/33RBSMT-N, 65,000 Btu
MSI-BSMTI	Manual Spark Ignition Kit for FPB Series Match Throw Systems featuring the Burning Spur. Kit includes: Mounting Plate, Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition Wiring, AAA Battery
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws
LIDS	Stainless Steel lids with brushed finished available on page 60
WINDSHIELDS	Tempered glass windshields available on page 59

For fire pits built with pavers, refer to page 44 & 45 for Paver Kit Control Panels & Paver Vent Kits

Custom shapes and sizes available by quote



# ROUND FLAT DISC

BURNER SYSTEMS TESTED & LISTED BY UNDERWRITERS LABORATORIES

## FLAT DISC STAINLESS STEEL TFS BURNER SYSTEMS

BEST



FPB-29DBSTFS-N 29" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low

FPB-34DBSTFS-N 34" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low

FPB-44DBSTFS-N 44" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low

FPB-29DBSTFS-P 29" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low

FPB-34DBSTFS-P 34" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low

FPB-44DBSTFS-P 44" Round Stainless Steel Disc, Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low



## FLAT DISC STAINLESS STEEL TMS BURNER SYSTEMS


BETTER



FPB-29DBSTMS-N 29" Round Stainless Steel Disc with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu

FPB-34DBSTMS-N 34" Round Stainless Steel Disc with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu

FPB-44DBSTMS-N 44" Round Stainless Steel Disc with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,000 Btu

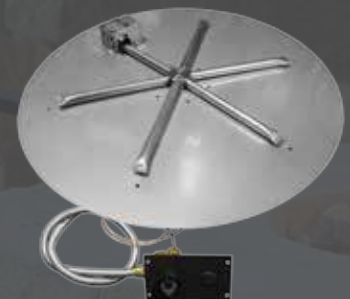

## FLAT DISC STAINLESS STEEL MT BURNER SYSTEMS


GOOD



FPB-29DBSMT-N 29" Stainless Steel Disc, 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu

FPB-34DBSMT-N 34" Stainless Steel Disc, 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu

FPB-44DBSMT-N 44" Stainless Steel Disc, 22" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu

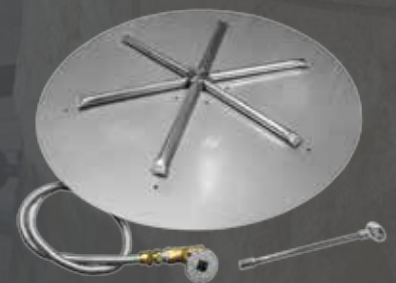





## TFS OPTIONAL ACCESSORIES

WS	Wired wall mount switch (On/Off)
TM-R-AF1TX	Wireless wall mount timer (30/60/120min)
1001D-AF1TX	Wireless wall mount switch (On/Off)
1322WT	Wireless Wall Mount On/Off/High/Low Transmitter
AF-4000ADP24(80)	110 volts AC adapter, converts to 7.5 DC volts for TFS systems
AF-4000HAT	Home/Pool automation transmitter system (works with most manufacturers systems)
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws

## TMS OPTIONAL ACCESSORIES

LPK#41	Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-29,34,44DBSTMS-N, 65,000 Btu
MSI-BSTMS	Manual Spark Ignition Kit for FPB Series TMS Systems featuring the Burning Spur. Kit. Includes: Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition wiring, AAA Battery
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws

## MT OPTIONAL ACCESSORIES

LPK#41	Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-29,34/44DBSMT-N, 65,000 Btu
MSI-BSMTI	Manual Spark Ignition Kit for FPB Series Match Throw Systems featuring the Burning Spur. Kit includes: Mounting Plate, Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition Wiring, AAA Battery
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws

For fire pits built with pavers, refer to page 44 & 45 for Paver Kit Control Panels & Paver Vent Kits

Custom shapes and sizes available by quote



# SQUARE PAN

BURNER SYSTEMS TESTED & LISTED BY UNDERWRITERS LABORATORIES

## SQUARE STAINLESS STEEL TFS BURNER SYSTEMS

BEST



FPB-20SBSTFS-N	20" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TFS Electronic Ignition, for Natural Gas, 80,000 Btu on High, 48,000 Btu on Low
FPB-26SBSTFS-N	26" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low
FPB-32SBSTFS-N	32" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low
FPB-38SBSTFS-N	38" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Natural Gas, 105,000 Btu on High, 51,000 Btu on Low
FPB-20SBSTFS-P	20" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 79,000 Btu on High, 47,400 Btu on Low
FPB-26SBSTFS-P	26" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low
FPB-32SBSTFS-P	32" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low
FPB-38SBSTFS-P	38" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TFS Electronic Ignition, for Liquid Propane, 100,000 Btu on High, 49,500 Btu on Low




## SQUARE STAINLESS STEEL TMS BURNER SYSTEMS

BETTER



FPB-20SBSTMS-N	20" Stainless Steel Pan with Stainless Steel 16" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu
FPB-26SBSTMS-N	26" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu
FPB-32SBSTMS-N	32" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu
FPB-38SBSTMS-N	38" Stainless Steel Pan with Stainless Steel 22" Burning Spur, TMS Ignition, for Natural Gas, 65,500 Btu

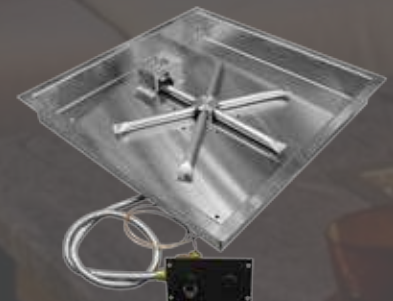

## SQUARE STAINLESS STEEL MT BURNER SYSTEMS

GOOD



FPB-20SBSMT-N	20" Stainless Steel Pan with Stainless Steel 16" Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu
FPB-26SBSMT-N	26" Stainless Steel Pan with Stainless Steel 22" Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu
FPB-32SBSMT-N	32" Stainless Steel Pan with Stainless Steel 22" Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu
FPB-38SBSMT-N	38" Stainless Steel Pan with Stainless Steel 22" Burning Spur, MT Ignition, for Natural Gas, 65,000 Btu







## TFS OPTIONAL ACCESSORIES

WS	Wired wall mount switch (On/Off)
TM-R-AF1TX	Wireless wall mount timer (30/60/120min)
1001D-AF1TX	Wireless wall mount switch (On/Off)
1322WT	Wireless Wall Mount On/Off/High/Low Transmitter
AF-4000ADP24(80)	110 volts AC adapter, converts to 7.5 DC volts for TFS systems
AF-4000HAT	Home/Pool automation transmitter system (works with most manufacturers systems)
LIDS	Stainless Steel lids with brushed finished available on page 60
WINDSHIELDS	Tempered glass windshields available on page 59
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws

## TMS OPTIONAL ACCESSORIES

LPK#41	Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-19/25/29/33RBSMT-N, FPB-20/26/32/38SBSMT-N, FPB-34/44DBSMT-N, 65,000 Btu
MSI-BSTMS	Manual Spark Ignition Kit for FPB Series TMS Systems featuring the Burning Spur. Kit Includes: Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition wiring, AAA Battery
LIDS	Stainless Steel lids with brushed finished available on page 60
WINDSHIELDS	Tempered glass windshields available on page 59
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws

## MT OPTIONAL ACCESSORIES

LPK#41	Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-20/26/32/38SBSMT-N, 65,000 Btu
MSI-BSMTI	Manual Spark Ignition Kit for FPB Series Match Throw Systems featuring the Burning Spur. Kit includes: Mounting Plate, Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition Wiring, AAA Battery
LIDS	Stainless Steel lids with brushed finished available on page 60
WINDSHIELDS	Tempered glass windshields available on page 59
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws


For fire pits built with pavers, refer to page 44 & 45 for Paver Kit Control Panels & Paver Vent Kits

Custom shapes and sizes available by quote



# LINEAR PAN L SERIES

THE COMPLETE CUSTOMIZABLE OUTDOOR BURNER SYSTEM  
TESTED & LISTED BY UNDERWRITERS LABORATORIES

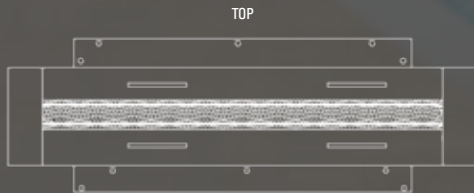

## FEATURES

- Tested and Approved to: ANSI Z21.97-2014/CSA 2.41-2014 standards by Underwriters Laboratories
- Available in Thermocouple Flame Sense (TFS) Piloted Version and Match Throw (MT) systems
- Combine any two sizes end to end for a complete custom burner in various lengths
- Adjustable burner cradle flanges allow for varying thickness's of top finishing materials (Granite, Marble, Stone, Tile etc.) Ranging from 1/2" to 2 3/4" thick
- Installation cradle remains in place allowing it to be installed under the surface of the top finishing material - no fear of warping, which can cause cracked top surfaces
- Easy "Lift-Out" burner assembly for easy access to service as needed
- Industry best clearances to combustibles
- Thermocouple Flame Sense (TFS) includes On/Off/High/Low remote control
- Stainless Steel Ignition Components for greater reliability
- Warranty: Five (5) year on stainless steel components. Two (2) year on gas valve and electronic igniter assembly. Commercial Applications: One (1) year warranty on all parts

## L SERIES TFS BURNER SYSTEMS

BEST



FPB-24LTFS-N

"L" Series 24" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Natural Gas: 35,000 Btu's High | 20,000 Btu's Low

FPB-30LTFS-N

"L" Series 30" Stainless steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Natural Gas: 42,000 Btu's High | 23,000 Btu's Low

FPB-36LTFS-N

"L" Series 36" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Natural Gas: 55,000 Btu's High | 37,000 Btu's Low

FPB-24LTFS-P

"L" Series 24" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Liquid Propane: 35,000 Btu's High | 20,000 Btu's Low

FPB-30LTFS-P

"L" Series 30" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Liquid Propane: 42,000 Btu's High | 23,000 Btu's Low

FPB-36LTFS-P

"L" Series 36" Stainless Steel Burner and Pan in Burner Cradle - TFS Electronic Ignition System with On/Off/Hi/Low Remote Control for Liquid Propane: 55,000 Btu's High | 37,000 Btu's Low

Lava Rock and/or Glass is required to operate the burner. Please see page 50 - 52 for options



## L SERIES MT BURNER SYSTEMS



FPB-24LMT-N

"L" Series 24" Stainless Steel Burner and Pan in Burner Cradle - Match Throw System includes Key Valve, Key Valve Cover and Key, 35,000 Btu Natural Gas

FPB-30LMT-N

"L" Series 30" Stainless Steel Burner and Pan in Burner Cradle - Match Throw System includes Key Valve, Key Valve Cover and Key, 45,000 Btu Natural Gas

FPB-36LMT-N

"L" Series 36" Stainless Steel Burner and Pan in Burner Cradle - Match Throw System includes Key Valve, Key Valve Cover and Key, 55,000 Btu Natural Gas

For fire pits built with pavers, refer to page 44 & 45 for Paver Kit Control Panels & Paver Vent Kits

## L SERIES OPTIONAL ACCESSORIES

TM-R-AF1TX

Wireless wall mount timer (30/60/120min)

1001D-AF1TX

Wireless wall mount switch (On/Off)

1322WT

Wireless Wall Mount On/Off/High/Low Transmitter

WS

Wired wall mount switch (On/Off)

AF-4000ADP24(80)

110 volts AC adapter, converts to 7.5 DC volts for TFS systems

AF-4000HAT

Home/Pool automation transmitter system (works with most manufacturers systems)

LPK#50

Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-24LMT-N, 35,000 Btu

LPK#48

Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-30LMT-N, 45,000 Btu

LPK#44

Liquid Propane (LP) Conversion Kit. Converts fire pit from Natural Gas to LP Gas. Includes: Orifice/Air Shutter, rating plate label sticker and instructions. For use with FPB-36LMT-N, 55,000 Btu

LIDS

Stainless Steel lids with brushed finished available on page 60

WINDSHIELDS

Tempered glass windshields available on page 59

VENT-KIT-6X12

Includes two (2) 6" tall x 12" wide vents with mounting screws

TRIM-L24

3/4" stainless steel decorative trim fits FPB-24L Series

TRIM-L30

3/4" stainless steel decorative trim fits FPB-30L Series

TRIM-L36

3/4" stainless steel decorative trim fits FPB-36L Series

TRIM-L48

3/4" stainless steel decorative trim fits (2) FPB-24L Series end to end

TRIM-L60

3/4" stainless steel decorative trim fits (2) FPB-30L Series end to end

TRIM-L72

3/4" stainless steel decorative trim fits (2) FPB-36L Series end to end

## COMBINING L SERIES BURNERS

Take any two (2) burners and combine them together to create a completely custom fire feature.



# NON-LISTED

FACTORY TESTED - HIGH BTU OUTPUT

## ROUND STAINLESS STEEL NON-LISTED HIGH BTU MT BURNER SYSTEMS

FPB-19RBS16MT-N 19" Round Stainless Steel Pan, Stainless Steel 16" Burning Spur, MT, for Natural Gas, 60,000 Btu

FPB-25RBS22MT-N 25" Round Stainless Steel Pan, Stainless Steel 22" Burning Spur, MT, for Natural Gas, 100,000 Btu

FPB-29RBS22MT-N 29" Round Stainless Steel Pan, Stainless Steel 22" Burning Spur, MT, for Natural Gas, 100,000 Btu

FPB-33RBS31MT-N 33" Round Stainless Steel Pan, Stainless Steel 31" Burning Spur, MT, for Natural Gas, 160,000 Btu



## SQUARE STAINLESS STEEL NON-LISTED HIGH BTU MT BURNER SYSTEMS

FPB-20SBS16MT-N 20" Square Stainless Steel Pan, Stainless Steel 16" Burning Spur, MT, for Natural Gas, 60,000 Btu

FPB-26SBS22MT-N 26" Square Stainless Steel Pan, Stainless Steel 22" Burning Spur, MT, for Natural Gas, 100,000 Btu

FPB-32SBS31MT-N 32" Square Stainless Steel Pan, Stainless Steel 31" Burning Spur, MT, for Natural Gas, 160,000 Btu

FPB-38SBS36MT-N 38" Square Stainless Steel Pan, Stainless Steel 36" Burning Spur, MT, for Natural Gas, 183,000 Btu




## ROUND FLAT DISC STAINLESS STEEL NON-LISTED HIGH BTU MT BURNER SYSTEMS

FPB-29DBS22MT-N 29" Round Stainless Steel Disc, 22" Stainless Steel Burning Spur, MT ignition for Natural Gas, 100,000 BTU

FPB-34DBS31MT-N 34" Round Stainless Steel Disc, 31" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 160,000 Btu

FPB-44DBS36MT-N 44" Round Stainless Steel Disc, 36" Stainless Steel Burning Spur, MT Ignition, for Natural Gas, 183,000 Btu

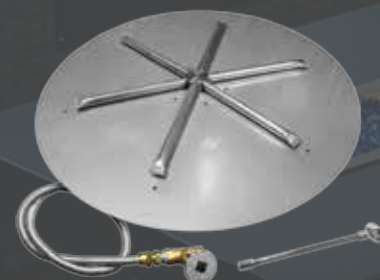

## LINE OF FIRE

LOF-30MT-N Stainless Steel Pan & Burner, MSI Ignition for Natural Gas, 45,000 Btu

LOF-36MT-N Stainless Steel Pan & Burner, MSI Ignition for Natural Gas, 65,000 Btu

LOF-30MSI-N Stainless Steel Burner, MSI Ignition for Natural Gas, 45,000 Btu

LOF-36MSI-N Stainless Steel Burner, MSI Ignition for Natural Gas, 65,000 Btu



Lava Rock and/or Glass is required to operate the burner. Please see page 50 - 52 for options



For fire pits built with pavers, refer to page 44 & 45 for  
Paver Kit Control Panels & Paver Vent Kits

## ROUND NON-LISTED OPTIONAL ACCESSORIES

OAS-LP45	Propane Conversion Kit (Orifice/Air Shutter) for 16" Burning Spur, 55,000 Btu
OAS-LP35	Propane Conversion Kit (Orifice/Air Shutter) for 22" Burning Spur, 99,000 Btu
OAS-LP29	Propane Conversion Kit (Orifice/Air Shutter) for 31" Burning Spur, 150,000 Btu
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws

## SQUARE NON-LISTED OPTIONAL ACCESSORIES

OAS-LP45	Propane Conversion Kit (Orifice/Air Shutter) for 16" Burning Spur, 55,000 Btu
OAS-LP35	Propane Conversion Kit (Orifice/Air Shutter) for 22" Burning Spur, 99,000 Btu
OAS-LP29	Propane Conversion Kit (Orifice/Air Shutter) for 31" Burning Spur, 150,000 Btu
OAS-LP25	Propane Conversion Kit (Orifice/Air Shutter) for 36" Burning Spur, 182,000 Btu
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws

## FLAT DISC NON-LISTED OPTIONAL ACCESSORIES

OAS-LP35	Propane Conversion Kit (Orifice/Air Shutter) for 22" Burning Spur, 99,000 Btu
OAS-LP29	Propane Conversion Kit (Orifice/Air Shutter) for 31" Burning Spur, 150,000 Btu
OAS-LP25	Propane Conversion Kit (Orifice/Air Shutter) for 36" Burning Spur, 182,000 Btu
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws

## LINE OF FIRE NON-LISTED OPTIONAL ACCESSORIES

OAS-LP49	Propane Conversion Kit (Orifice/Air Shutter) for LOF-30 Series. 43,000 Btu
OAS-LP41	Propane Conversion Kit (Orifice/Air Shutter) for LOF-36 Series. 65,000 Btu
LID-LOF30	Linear stainless steel lid with brushed finish for the LOF-30 Series
LID-LOF36	Linear stainless steel lid with brushed finish for the LOF-36 Series
VENT-KIT-6X12	Includes two (2) 6" tall x 12" wide vents with mounting screws



# AnF (Assemble n Finish)

## OUTDOOR LIVING ENCLOSURES

### FEATURES



- Assemble within minutes of opening the packaging
- AnF framework is constructed of 16 gauge Galvanized steel and powder coated with Zinc Epoxy Primer – engineered to protect from outdoor elements
- Zinc Epoxy Powder Coating is used in a number of applications including automotive coatings
- Exterior sides are factory clad with 1/2" PermaBase® cement board. PermaBase is impact resistant, extremely durable and dimensionally stable. It has overall flexural, compressive and tensile strength characteristics, highly moisture resistant and will not rot, disintegrate or swell when exposed to water
- Pre-punched holes and self tapping stainless steel screws allow for quick assembly
- Heavy duty adjustable Zinc Plated leveling legs with large flat bottom for stability
- Top is constructed of 12mm MGO (Magnesium Oxide Board)
- Burner template marked on top for Firegear's most popular size burners
- Each AnF includes two (2) 12" x 6" vents to provide the required 18 square inches of cross ventilation
- Each AnF cabinet ships on its own specially designed skid. The packaging is engineered to help protect from potential damage in shipping
- Round units may be stacked three high for easy storage
- Compression tested with 700lbs - no structural failure
- Built to last, backed up by a five (5) year limited warranty



ROUND




LINEAR




SQUARE

### ROUND ASSEMBLY

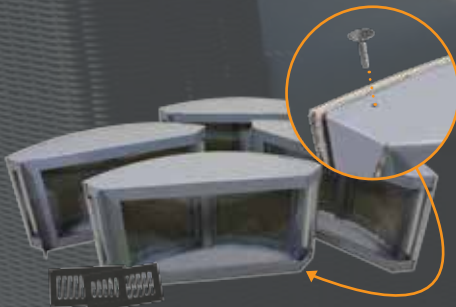


The AnF Round ships as four (4) individual pieces. Start by installing the leveling legs into the bottom of the unit. Make sure you screw the bolt in until there is about 1" of clearance.

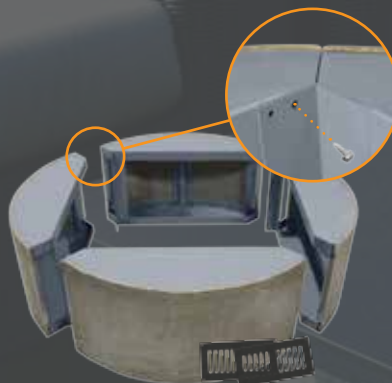

Place the four (4) pieces together. Line up the holes on each piece with the corresponding holes and drill in the self tapping screws. Do this for all eight (8) screws.



Install the 45° angle cross bars. This allows the round pit to be used for both Firegear round and square pans.

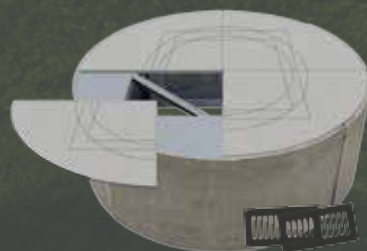

The AnF comes with a 12mm MGO top. This piece is marked for Firegear's most common square and round burners. Cut out your desired burner size, then attach the board and the installation is complete.



## MODELS

### AnF ROUND SERIES

ANF-R42	42" diameter x 18" tall round enclosure
ANF-R48	48" diameter x 18" tall round enclosure
ANF-R60	60" diameter x 18" tall round enclosure

### AnF LINEAR SERIES

ANF-L48	48" long x 24" wide x 18" tall - linear enclosure
ANF-L66	66" long x 24" wide x 18" tall - linear enclosure
ANF-L74	74" long x 24" wide x 18" tall - linear enclosure
ANF-L96	96" long x 24" wide x 18" tall - linear enclosure

### AnF SQUARE SERIES

ANF-S48	48" diameter x 18" tall square enclosure
ANF-S60	60" diameter x 18" tall square enclosure

## COMBINATIONS

AnF ENCLOSURES & FIRE PIT BURNER COMBINATIONS

### AnF ROUND PACKAGES - TFS **BEST**

ANFR42-19RTFS-N	42" Round AnF with a 19" Round TFS System (Natural Gas)
ANFR42-19RTFS-P	42" Round AnF with a 19" Round TFS System (Propane)
ANFR48-19RTFS-N	48" Round AnF with a 19" Round TFS System (Natural Gas)
ANFR48-19RTFS-P	48" Round AnF with a 19" Round TFS System (Propane)



### AnF ROUND PACKAGES - TMS **BETTER**

ANFR42-19RTMS-N	42" Round AnF with a 19" Round TMS System (Natural Gas), LP conversion kit available
ANFR48-19RTMS-N	48" Round AnF with a 19" Round TMS System (Natural Gas), LP conversion kit available



### AnF ROUND PACKAGES - MT **GOOD**

ANFR42-19RMT-N	42" Round AnF with a 19" Round MT System (Natural Gas), LP conversion kit available
ANFR48-19RMT-N	48" Round AnF with a 19" Round MT System (Natural Gas), LP conversion kit available


### AnF LINEAR PACKAGES - TFS **BEST**

ANFL48-30LTFS-N	48" Linear AnF with a 30" L Series TFS System (Natural Gas)
ANFL48-30LTFS-P	48" Linear AnF with a 30" L Series TFS System (Propane)



### AnF LINEAR PACKAGES - MT **GOOD**

ANFL48-30LMT-N	48" Linear AnF with a 30" L Series MT System (Natural Gas), LP conversion kit available
ANFL48-LOF30MT-N	48" Linear AnF with a 30" Line of Fire MT System (Natural Gas), LP conversion kit available

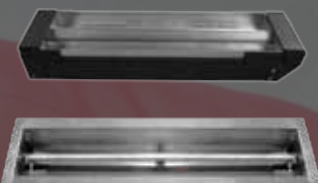



# BURNERS


## BURNING SPUR

For a natural-looking flame that mimics a wood-burning fire, the Burning Spur's innovative design and superior construction (made of 304 stainless steel) is the choice of outdoor fire professionals. Backed by our five (5) year warranty, Firegear Burning Spur's will keep the fire going strong, season after season.

To design the ultimate campfire feature, choose the Burning Spur, Burning Spur kit or pan/disc burner system that fits your design and ignition system. Pans and burners are available in a range of sizes, from 16" to 44".

## FEATURES

- Constructed of corrosion resistant 304 stainless steel in order to stay robust in all weather conditions
- Every leg has been specifically designed to be able to house an ignition system
- Internal dam built inside the center of the Burning Spur helps prohibit water flowing back into the gas line
- The legs feature a pitched design letting water run off easily
- The bottom hub features weep holes for water release so there is no freeze / thaw damage
- LP conversion kits available in order to convert from Natural Gas to Propane
- Cooling points between each spur leg helps prevent heat transfer to the outer edge to avoid top material from cracking
- We offer a consumer warranty of five (5) years, also a commercial warranty of one (1) year
- The stock sizes come in 12", 16", 22", 31", 36" (measured tip to tip)

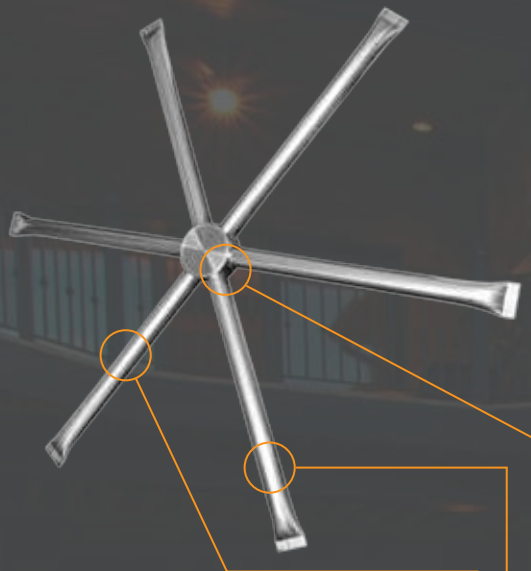

### SPUR KIT - MT

Burner, Orifice, 1/2" OD Flare x 1/2" MIP, 46" Stainless Steel Tranquiline Gas Flex, 1/2" OD Flare x 1/2" FIP, Key Valve, Polished Chrome Cover and 8" Polished Chrome Key



### SPUR ONLY - MT

Burner, Orifice, 1/2" Flare x 1/2" OD FIP

## MODELS

KIT	SPUR	DESCRIPTION	LP ORIFICE	BTU (NG)	BTU (LP)
DBS-12K	DBS-12	12" - 304 Stainless Steel Burning Spur	OAS-LP52	42,000 Btu	33,000 Btu
DBS-16K	DBS-16	16" - 304 Stainless Steel Burning Spur	OAS-LP45	60,000 Btu	55,000 Btu
DBS-22K	DBS-22	22" - 304 Stainless Steel Burning Spur	OAS-LP35	100,000 Btu	99,000 Btu
DBS-31K	DBS-31	31" - 304 Stainless Steel Burning Spur	OAS-LP29	160,000 Btu	150,000 Btu
DBS-36K	DBS-36	36" - 304 Stainless Steel Burning Spur	OAS-LP25	183,000 Btu	182,000 Btu





# FIRE RING



## MODELS

FG-FR-19S-R	19" - 201 Stainless Steel Fire Ring
FG-FR-24S-R	24" - 201 Stainless Steel Fire Ring
FG-FR-30S-R	30" - 201 Stainless Steel Fire Ring
FG-FR-36S-R	36" - 201 Stainless Steel Fire Ring

## OPTIONAL ACCESSORIES

FG-SB-F	Universal LP Conversion Kit for all size Fire Rings
---------	---

# PAVER ACCESS





# SSORIES



# FLEXFRAME KITS




Allows you to remove the burner system without removing any pavers


The Flexframe allows you to fill the gap between the inside opening and the burner pans or disc





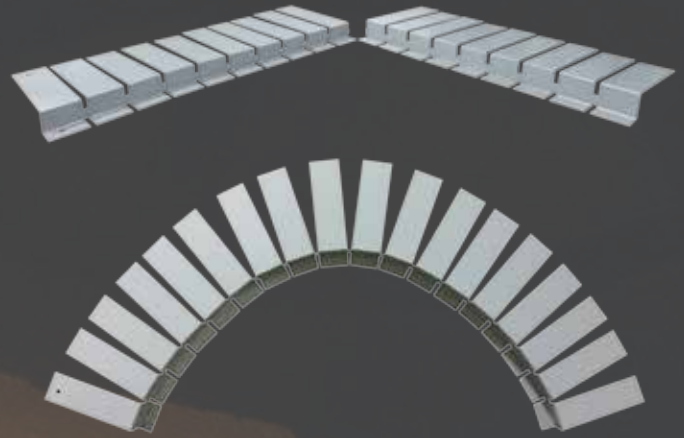


The flexframe can be bent or cut to fit any shape (square, linear or round) fire pit.

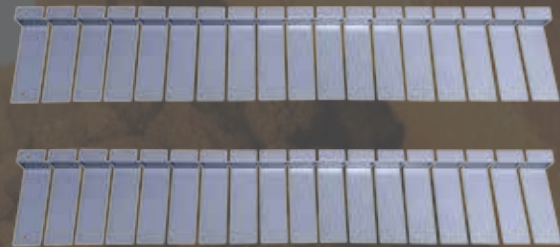

### FLEXFRAME-PC

Constructed of Zinc Epoxy Coated 16 Gauge Galvanized Steel. Engineered to protect against outdoor elements - two (2) 44" pieces per package

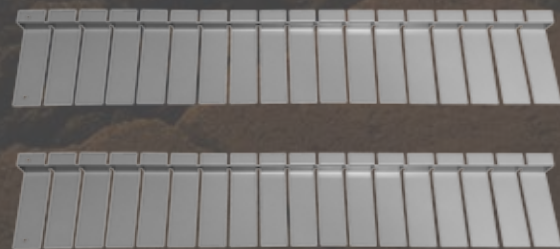


### FLEXFRAME-SS

Constructed of 16 Gauge 304 Stainless Steel. Engineered to protect against outdoor elements including salt water environments - two (2) 44" pieces per package.



# PAVER KIT CONTROL PANELS

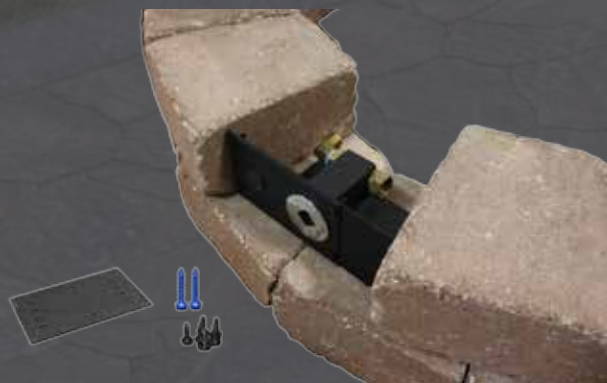

## PAVER-KIT-MT

For use when building fire pit enclosures with pavers used with Match Throw "MT" Burner Systems.

Includes: Face Plate for Key Valve with Rubber Plug for MSI hole, Paver Kit Bracket and Extender, Screws, Fittings, Tapcon® concrete anchors, Key Valve Kit included as part of the FPB Series Kit



## PAVER-KIT-MT-MSI

For use when building fire pit enclosures with pavers used with Match Throw "MT" Burner Systems.

Includes: Face plate for Key Valve and MSI, Paver Kit Bracket and Extender, Screws, Battery Operated Piezo Igniter Assembly, 48" Ignition Wire, AAA Battery, Ignition Hood, Screen Fittings, Tapcon® concrete anchors, Key Valve Kit included as part of FPB Series Kit



## PAVER-KIT-TMS

For use when building fire pit enclosures with pavers with FPB Series Thermocouple Manual Safety "TMS" Burner Systems.

Includes: Paver Kit Bracket and Extender, Screws, Fittings, Tapcon® concrete anchors, TMS Valve Kit and Face Plate included as part of FPB Series Kit.



## PAVER-KIT-TMS-MSI

For use when building fire pit enclosures with pavers with FPB Series Thermocouple Manual Safety "TMS" Burner System.

Includes: Paver Kit Bracket and Extender, Screws, Battery Operated Piezo Igniter Assembly, 48" Ignition Wire, AAA Battery, Ignition Hood, Screen, Fittings, Tapcon® concrete anchors, TMS Valve Kit with Face Plate included as part of FPB Series Kit.



# VENT KITS

FOR PAVER KIT CONTROL PANELS



## PAVER-VENT-4


Paver Vent Kit: includes two (2) 3 <sup>5</sup>/<sub>8</sub>" tall x 8" wide vents with mounting plate, extension plate extends overall size up to 10" wide and two (2) Tapcon® concrete anchors. Each vent provides 18 square inches of ventilation.



## PAVER-VENT-6

Paver Vent Kit: includes two (2) 5 <sup>5</sup>/<sub>8</sub>" tall x 8" wide vents with mounting plate, extension plate extends overall size up to 10" wide and two (2) Tapcon® concrete anchors. Each vent provides 18 square inches of ventilation.

# JEWELRY

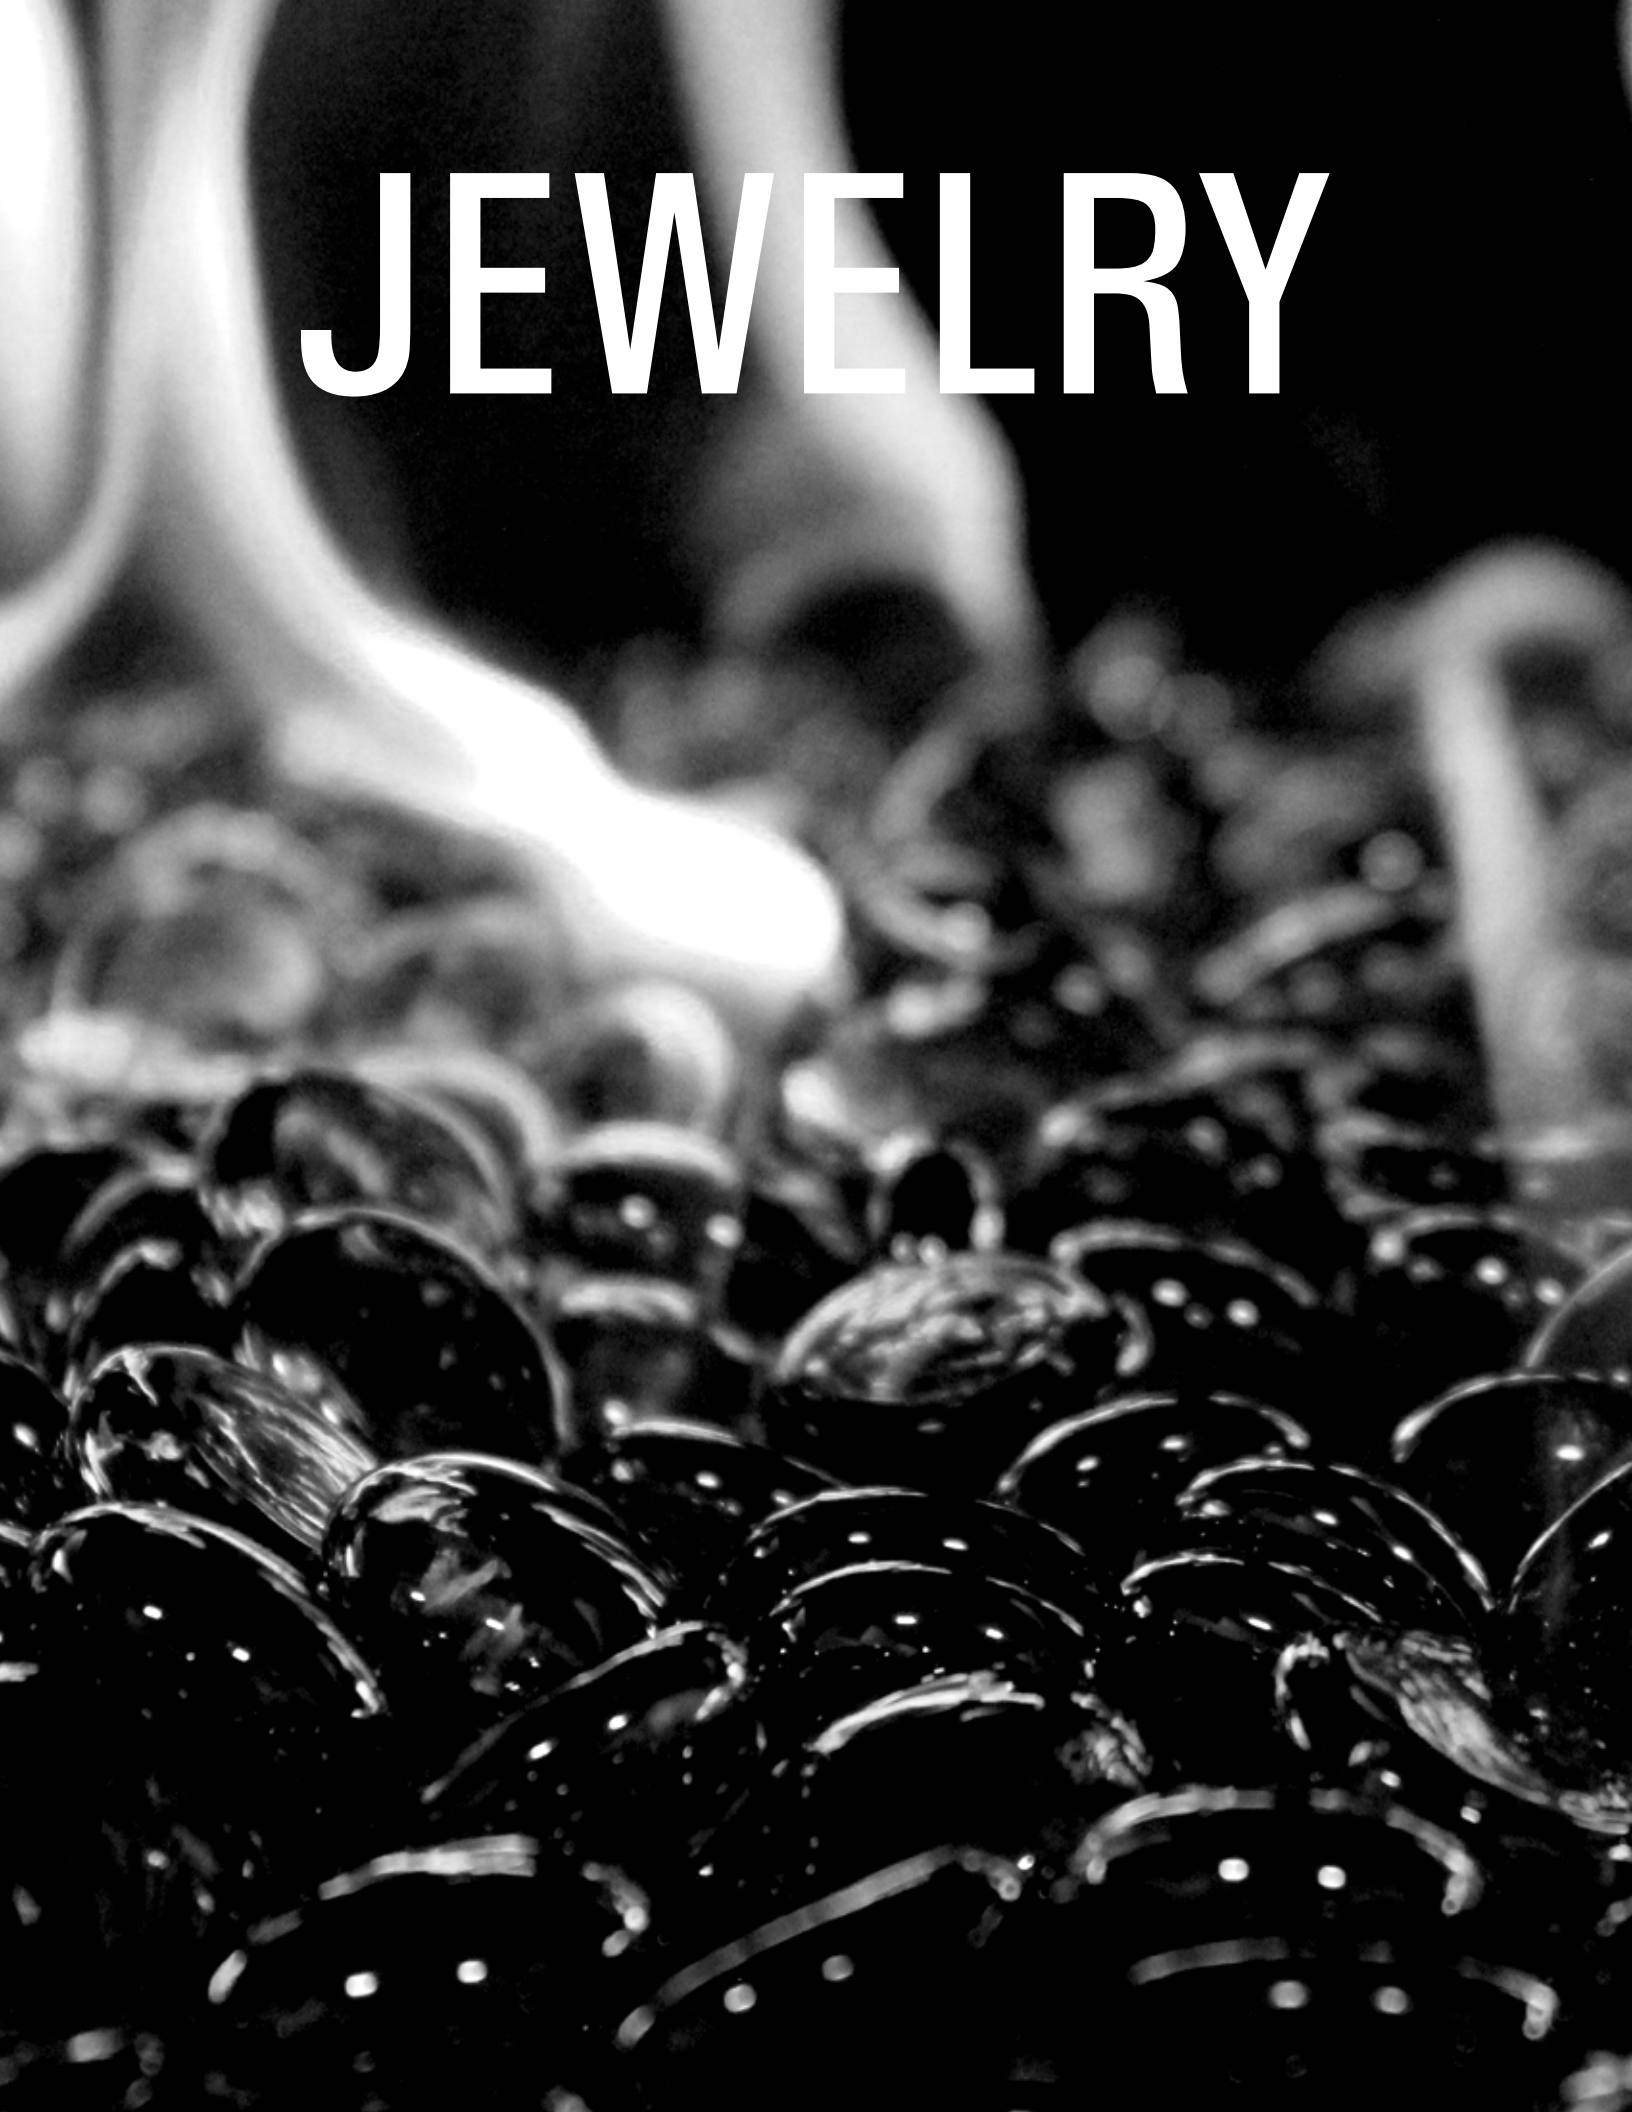





# HOW MUCH?

HOW MUCH MEDIA SHOULD I USE?

## ROUND FIRE PITS

INSIDE DIAMETER OF FIRE PIT	LAVA ROCK ONLY	LAVA ROCK AS A BASE	GLASS ON TOP OF LAVA ROCK	LAVA STONES ON TOP OF LAVA ROCK	LAVA BOULDERS ON TOP OF LAVA ROCK
16"	10 lbs	5 lbs	10 lbs	10 lbs	1/4 box
19"	15 lbs	10 lbs	20 lbs	15 lbs	1/2 box
25"	20 lbs	15 lbs	30 lbs	20 lbs	3/4 box
29"	25 lbs	20 lbs	40 lbs	25 lbs	1 box
33"	30 lbs	25 lbs	50 lbs	30 lbs	1 box
34"	30 lbs	25 lbs	50 lbs	30 lbs	1 box
44"	50 lbs	35 lbs	70 lbs	50 lbs	2 - 3 boxes

## SQUARE FIRE PITS


INSIDE DIAMETER OF FIRE PIT	LAVA ROCK ONLY	LAVA ROCK AS A BASE	GLASS ON TOP OF LAVA ROCK	LAVA STONES ON TOP OF LAVA ROCK	LAVA BOULDERS ON TOP OF LAVA ROCK
20"	15 lbs	10 lbs	20 lbs	15 lbs	1/2 box
26"	20 lbs	15 lbs	30 lbs	20 lbs	3/4 box
32"	30 lbs	25 lbs	50 lbs	30 lbs	1 box
38"	35 lbs	30 lbs	60 lbs	35 lbs	1 1/4 box

## LINEAR FIRE PITS

LENGTH OF FIRE PIT	LAVA ROCK ONLY	GLASS ONLY	LAVA STONES ONLY
24"	10 lbs	10 lbs	6 lbs
30"	10 lbs	13 lbs	10 lbs
36"	15 lbs	15 lbs	12 lbs
48"	16 lbs	20 lbs	16 lbs
54"	18 lbs	23 lbs	18 lbs
60"	20 lbs	26 lbs	20 lbs
66"	22 lbs	28 lbs	22 lbs
72"	24 lbs	30 lbs	24 lbs

### LAVA ROCK ONLY

When using lava rock, use enough to cover entire burner. Do not over-fill. Just use enough to hide the burner from view.

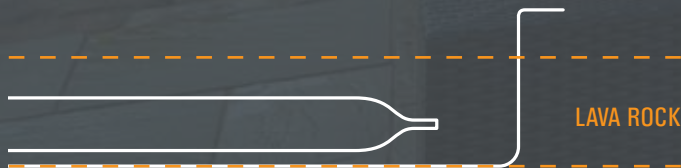


### LAVA ROCK & GLASS

In order to use glass, you must lay down a layer of lava rock. Fill the pan with lava rock until it is level with the top of the burner. Then take your glass and lay it on top of the lava rock and burner. The glass should only be 3/4" to 1" thick, or just enough to cover the burner.



### LAVA ROCK & LAVA STONES

In order to use lava stones, you must lay down a layer of lava rock. Fill the pan with lava rock until it is level with the top of the burner. Then take your lava stones and lay it on top of the lava rock and burner. The lava stones should only be one layer thick, just enough to cover the burner.

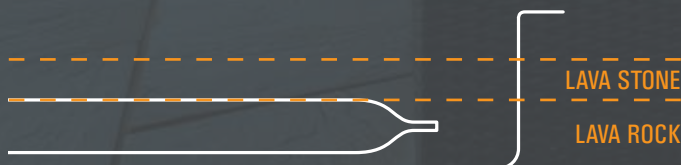

### LAVA ROCK & LAVA BOULDERS

In order to use lava boulders, you must lay down a bottom layer of lava rock. Fill the pan with lava rock until it is level with the top of the burner. Then take your lava boulders and lay it on top of the lava rock and burner. Lava boulders are 6" to 12" in diameter.









# MEDIA

FOR YOUR FIRE PIT

## LAVA ROCK FG-LAVA-50 / FG-LAVA-10



Mined from the earth, these dark rocks contrast beautifully against a bright flame. Each rock is approximately 1" to 2" in diameter.



50lb. Bag  
Sold in approx. one  
(1) cubic foot bags



10lb. Bag

## LAVA STONE FG-LS-50



Made from tumbled lava rock, these stones lend a casual elegance. Each stone is approximately 1 - 2" in diameter.



Sold in 50 lb. bags

## LAVA BOULDER FG-LB-30



These rugged rocks are 6" to 12" in diameter, for a coastal, straight-off-the-beach style.



Sold in a 30 lb. box.









# GLASS

FOR YOUR FIRE PIT

## FIREGLASS Large broken approximately 1/2" to 3/4" in size




Pepper  
GL-BLACK



Blueberry  
GL-DARK BLUE



Seabreeze  
GL-SEABREEZE



Crystal  
GL-CRYSTAL



Caribbean  
GL-LT BLUE



Cola  
GL-COPPER



Mint  
GL-GREEN

## LIQUID GLASS Glass beads approximately 16-18mm in size



Cobalt  
GB-COBALT



H2O  
GB-CLEAR



Midnight  
GB-BLACK



Sky  
GB-LT BLUE



Tequila  
GB-GOLD



White  
GB-WHITE

## REFLECTIVE GLASS Mirror finish broken reflective approximately 1/2" to 3/4" in size



Copper  
GRL-COPPER



Ebony  
GRL-BLACK



Bronze  
GRL-BRONZE



Tahiti  
GRL-TAHITI



Gold Finger  
GR-GOLD



Cobalt  
GR-COBALT

1/4" to 3/8"  
Small Reflective Glass





All glass is sold in 5 lb bags. There are eight (8) bags per case.

## JEWELRY DISPLAY FG-JEWELRY-POP-2

A retail point of purchase display for all of the glass that Firegear has to offer. The POP display holds up to forty-four (44) bags of glass.



GLASS  
NOT INCLUDED

## GLASS TOWER GL-GLASS TOWER

Spinning display with eighteen (18) glass cylinders. 13 inches tall x 10 inches in diameter.



## GLASS SAMPLE KIT GL-SAMPLE-KIT

Eighteen (18) different types of glass including Large Fireglass, Beaded, and Reflective.





# LOG SETS

FOR YOUR FIRE PIT



## SPIT FIRE

Model#: L-SF



This seventeen (17) piece refractory log set is a great alternative to enjoy your fire feature without the mess of real wood and ashes.

- Compatible with pits larger than 19"
- Refractory concrete material
- Ships as one (1) box, weights approx 52 lb.
- Five (5) Year limited warranty



## BEACH FIRE

Model#: L-BF



The modest version of the Spit Fire, this eight (8) piece set is designed for smaller fire pit burners or used as an accent piece on larger burners.

- Compatible with pits smaller than 20"
- Refractory concrete material
- Ships as one (1) box, weights approx 20 lb.
- Five (5) Year limited warranty







### SEDONA

Model#: L-SEDONA



The Sedona is the Grand Daddy of all the Firegear log sets. This nineteen (19) piece majestic fire pit log set can stack as high as 32".

- Compatible with pits larger than 25"
- Refractory concrete material
- Ships in three (3) boxes, approx 200 lb, ships LTL
- Five (5) Year limited warranty



### DRIFTWOOD TWIG SET

Model#: 326-930



Beach washed and twisted driftwood twigs inspired this design. The coloration in this six (6) piece log set is truly unique.

- Compatible with any size fire
- Ceramic fiber composition
- Ships one (1) box, weighs approx 22 lb.
- One (1) Year limited warranty

# ACCESSORIE





ES



# CONTROLS



## 1322WT

Wireless Wall Mount On/Off/High/Low Transmitter, twenty (20) foot range, surface mount, battery operated, uses two 3-volt button cell batteries (included) - (TFS units only)



## TM-R-AF1TX

Wireless Wall Timer (30min/60min/120min), twenty (20) foot range, surface mount, battery operated, uses two 3-volt button cell batteries (included) - (TFS units only)



## WS

Wired wall mount switch (On/Off)



## 1001D-AF1TX

Wireless wall mount switch (On/Off), twenty (20) foot range, surface mount, battery operated, uses two 3-volt button cell batteries (included) - (TFS units only)



## 1001-A

Wireless hand held remote (On/Off), battery operated, receiver with learn function, and a snap on wall plate for the receiver (TFS units only)



## AF-4000HAT

Home/Pool Automation System Link (works with most manufacturers systems)



## AF-4000ADP24(80)

110 volts AC adapter, converts to 7.5 DC volts for TFS systems. Requires a weatherproof enclosure.



# WINDSHIELDS



## SQUARE



GWS-2424

Tempered glass windshield for a 20" square pan



## LINEAR



GWS-3810

Tempered glass windshield - 38" long x 10" wide

GWS-4410

Tempered glass windshield - 44" long x 10" wide

GWS-3812

Tempered glass windshield - 38" long x 12" wide

GWS-4312

Tempered glass windshield - 43" long x 12" wide

GWS-8512

Tempered glass windshield - 85" long x 12" wide

# LIDS

Firegear lids are constructed of corrosion resistant 304 Stainless Steel with brushed finish and handle. These lids are great for covering your fire pit without logs when not in use.



## ROUND

LID-16R	Stainless steel lid for a 16" round pan
LID-19R	Stainless steel lid for a 19" round pan
LID-25R	Stainless steel lid for a 25" round pan
LID-29R	Stainless steel lid for a 29" round pan
LID-33R	Stainless steel lid for a 33" round pan



## SQUARE

LID-20S	Stainless steel lid for a 20" square pan
LID-26S	Stainless steel lid for a 26" square pan
LID-32S	Stainless steel lid for a 32" square pan
LID-38S	Stainless steel lid for a 38" square pan



## LINEAR

LID-24L	Stainless steel lid for a 24" L Series burner
LID-30L	Stainless steel lid for a 30" L Series burner
LID-36L	Stainless steel lid for a 36" L Series burner
LID-60L	Stainless steel lid for (2) FPB-24L end to end
LID-68L	Stainless steel lid for (2) FPB-30L end to end
LID-84L	Stainless steel lid for (2) FPB-36L end to end

---

LID-LOF30	Stainless steel lid for a 30" Line of Fire
LID-LOF36	Stainless steel lid for a 36" Line of Fire






# MSI KITS & VENTS




## MSI-BSMTI NG LP

Manual Spark Ignition Kit for FPB Series Match Throw Systems featuring the Burning Spur. Kit includes: Mounting Plate, Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition Wiring, AAA Battery

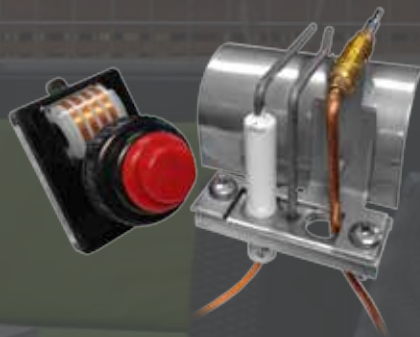

## MSI-BSTMS NG LP

Manual Spark Ignition Kit for FPB Series TMS Systems featuring the Burning Spur. Kit Includes: Spark Igniter Module, Ignition Hood, Ignition Hood Screen, Ignition Rain Shield, 2-Probe Spark Igniter, Burner Rain Shield and Bracket, Ignition wiring, AAA Battery.

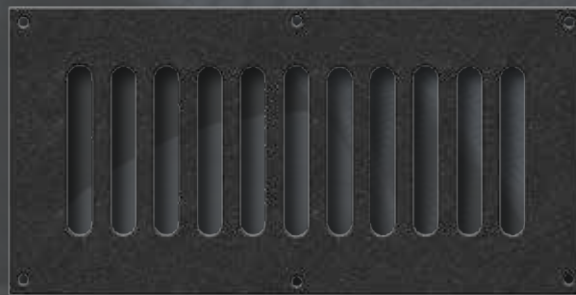

## VENT-KIT-6X12 NG LP

Vent kit: includes two (2) 6" tall x 12" wide vents with mounting screws. Each vent provides 18 square inches of ventilation

# HOSES & REGULATORS



## FG-32LPHRK

32" Liquid Propane Hose and Regulator Kit, Rated at 85,375 Btu 10" WC.  
CSA - AGA / CGA Approved,  $\frac{3}{8}$ " Flared ID



## FG-12QDK

Quick Disconnect Kit for use with Natural Gas or Liquid Propane - 12' (144"),  $\frac{3}{8}$ " I.D. Gray PVC Galvanized Steel Hose, Quick Disconnect Fitting and Socket Dust Cap, 80,000 Btu. CSA-AGA/CGA approved to -40 Degrees F



## FG-60LPHRK

60" Liquid Propane Hose and Regulator Kit, Rated at 130,000 Btu 10" WC.  
CSA - AGA / CGA Approved,  $\frac{3}{8}$ " Flared ID



## FG-LPRK

Rated at 100,000 Btu Liquid Propane Regulator,  $\frac{3}{8}$ " MPT Adapter and Acme Quick Connect. CSA-AGA/CGA approved



# KEY VALVES



**KVSC-PC-8** 

Standard Capacity Straight Key Valve with Polished Chrome Cover and 8" Key, 158,000 Btu @ 1/2 PSI



**KVHC-PC-8** 

High Capacity Straight Key Valve with Polished Chrome Cover and 8" Key, 350,000 Btu @ 1/2 PSI



**KEY-BLK-3** 

3" Flat Black Key for Key Valve



**KEY-PC-3** 

3" Polished Chrome Key for Key Valve



**KEY-PC-8** 

8" Polished Chrome Key for Key Valve



**KEY-PC-12** 

12" Polished Chrome Key for Key Valve



**KC-BLK** 

Key Valve Cover - Flat Black. Will not fit the PAVER-KIT-MT Control Panels.

*Fits KVSC Valve ONLY!*



**KEY-PC** 

Key Valve Cover - Polished Chrome

# VALVES & FITTINGS



**01-387**  
Connector Ball Valve  
3/8" OD Flare x 1/2" FIP



**01-487**  
Connector Ball Valve  
1/2" OD Flare x 1/2" FIP



**01-266**  
Flare Ball Valve  
3/8" OD Flare x 3/8" OD Flare



**01-288**  
Flare Ball Valve  
1/2" OD Flare x 1/2" OD Flare



**U1-6C-S**  
Steel Gas Flare Fitting, 3/8" OD Flare x 3/8" MIP (Tapped 1/8" FIP)



**U1-6D-S**  
Steel Gas Flare Fitting, 3/8" OD Flare x 1/2" MIP (Tapped 3/8" FIP)



**U3-6C-S**  
Steel Gas Flare Fitting, 3/8" OD Flare x 3/8" FIP



**U1-8D-S**  
Steel Gas Flare Fitting, 1/2" OD Flare x 1/2" MIP (Tapped 3/8" FIP)



**49-66**  
Steel Gas Flare Fitting, 3/8" OD Flare x 3/8" MIP Elbow



**50-68**  
Steel Gas Flare Fitting, 3/8" OD Flare x 1/2" FIP Elbow



**U1-8C-S**  
Steel Gas Flare Fitting, 1/2" OD Flare x 3/8" MIP (Tapped 1/4" FIP)



**50-88**  
Steel Gas Flare Fitting, 1/2" OD Flare x 1/2" FIP Elbow



**U3-8C-S**  
Steel Gas Flare Fitting, 1/2" OD Flare x 3/8" FIP



**U3-8D-S**  
Steel Gas Flare Fitting, 1/2" OD Flare x 1/2" FIP



**49-88**  
Steel Gas Flare Fitting, 1/2" OD Flare x 1/2" MIP Elbow




**46-88**  
Brass Female Connector, 1/2" OD x 1/2" FIP



**46-66**  
Brass Female Connector, 3/8" OD x 3/8" FIP




**42-R-86**  
Brass Reducing Union, 1/2" x 3/8"



**46-86**  
Brass Female Connector, 1/2" OD x 3/8" FIP



**48-86**  
Brass Female Connector, 1/2" OD x 3/8" MIP



**U3-6D-S**  
Steel Gas Flare Fitting, 3/8" OD Flare x 1/2" FIP



**113BS-E5**  
Schedule 40 Black Steel Pipe Nipple, 5" Long 3/4" MIP



**113BS-C**  
Schedule 40 Black Steel Pipe Nipple, Close 3/8" MIP



**BS309-6**  
Schedule 40 Black Steel 90 Degree Elbow, 3/8"



**SS499-8**  
1/2" 304 Stainless Steel coupling




**SS4310-8**  
1/2" 304 Stainless Steel street elbow



# FLEX LINES

CSA Approved Stainless Steel Gas Hearth Connectors Available in  $\frac{3}{8}$ " &  $\frac{1}{2}$ " OD with Flared Fittings  
Stainless or Black Coated Stainless.

Tranquiline "Non-Whistling" Gas Flex Lines with and without fittings. For flex lines with fittings, call for part numbers and pricing.



## T100 SERIES

T100-9898-10	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 10", with $\frac{3}{8}$ " OD flare nuts
T100-9898-16	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 16", with $\frac{3}{8}$ " OD flare nuts
T100-9898-22	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 22", with $\frac{3}{8}$ " OD flare nuts
T100-9898-28	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 28", with $\frac{3}{8}$ " OD flare nuts
T100-9898-34	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 34", with $\frac{3}{8}$ " OD flare nuts

## T200 SERIES

T200-9898-10	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 10", with $\frac{1}{2}$ " OD flare nuts
T200-9898-16	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 16", with $\frac{1}{2}$ " OD flare nuts
T200-9898-22	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 22", with $\frac{1}{2}$ " OD flare nuts
T200-9898-28	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 28", with $\frac{1}{2}$ " OD flare nuts
T200-9898-34	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 34", with $\frac{1}{2}$ " OD flare nuts
T200-9898-46	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 46", with $\frac{1}{2}$ " OD flare nuts



## T102 SERIES

T102-9898-10	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 10", with $\frac{3}{8}$ " OD flare nuts, Black Coated
T102-9898-16	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 16", with $\frac{3}{8}$ " OD flare nuts, Black Coated
T102-9898-22	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 22", with $\frac{3}{8}$ " OD flare nuts, Black Coated
T102-9898-28	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 28", with $\frac{3}{8}$ " OD flare nuts, Black Coated
T102-9898-34	Tranquiline flex connector, $\frac{3}{8}$ " OD ( $\frac{1}{4}$ " ID) x 34", with $\frac{3}{8}$ " OD flare nuts, Black Coated

## T202 SERIES

T202-9898-10	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 10", with $\frac{1}{2}$ " OD flare nuts, Black Coated
T202-9898-16	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 16", with $\frac{1}{2}$ " OD flare nuts, Black Coated
T202-9898-22	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 22", with $\frac{1}{2}$ " OD flare nuts, Black Coated
T202-9898-28	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 28", with $\frac{1}{2}$ " OD flare nuts, Black Coated
T202-9898-34	Tranquiline flex connector, $\frac{1}{2}$ " OD ( $\frac{3}{8}$ " ID) x 34", with $\frac{1}{2}$ " OD flare nuts, Black Coated



# DEALER TOOLS

THE SELLING TOOLS YOU NEED

## FIREGEAR KIOSK FG-KIOSK-KIT

The Firegear three-sided spinning kiosk provides a step-by-step guide on how to select the proper components to build a fire pit.

Includes: FG-KIOSK-OUTDOOR, DBS-22, KIOSK-FPB-16MT, KIOSK-FPB-20TMS, FPB-30LTFS, KIOSK-GLASS-JARS.



Dimensions: 75" Tall x 22" Wide

## FIREGEAR BANNER FG-AD-BANNER

Firegear authorized dealer banner. 2 feet high x 4 feet long







## JEWELRY DISPLAY FG-JEWELRY-POP-2

A retail point of purchase display for all of the glass that Firegear has to offer. The POP display holds up to forty-four (44) bags of glass.



GLASS  
NOT INCLUDED

Dimensions: 64" Tall x 26" Wide x 17" Deep

## GLASS TOWER GL-GLASS TOWER

Spinning display with eighteen (18) glass cylinders. 13 inches tall x 10 inches in diameter.



## GLASS SAMPLE KIT GL-SAMPLE-KIT

Eighteen (18) different types of glass including Large Fireglass, Beaded, and Reflective.





9230 CONSERVATION WAY  
FORT WAYNE, IN 46809

TECHNICAL SUPPORT: 1.855.498.8324  
SALES SUPPORT: 1.888.672.8929

[www.firegearoutdoors.com](http://www.firegearoutdoors.com)

INSTALLATION INSTRUCTIONS & SPECIFICATION  
BOOK AVAILABLE ONLINE