



QUALITY FIREPLACE & GRILL PRODUCTS

4301 WESTGROVE DRIVE ADDISON, TEXAS 75001 (972) 250-3113 1-800-833-1139 Fax: (972) 250-3016





Radco and CSA Approved Vented Log Sets with Low Profile Valve Assemblies

USA MANUFACTURER OF QUALITY PRODUCTS

> GAS LOGS VENTED VENT-FREE CSA/RADCO





SHOWN ABOVE "TEXAS HICKORY FIRE"

BURNER ASSEMBLIES WITH SKYTECH 3-IN-1 VALVE




(SHOWN WITH OPTIONAL CEBB EMBER BED BURNER)

- RATED AT 225° F
- COMPACT SIZE LOW PROFILE
- 3-IN-1 VALVE IS MANUAL VALVE THAT CAN BE CONVERTED TO ON/OFF REMOTE OR VARIABLE MOTORIZED ON/OFF HIGH/LOW REMOTE
- RADCO AND CSA SYSTEMS
- CAN BE USED WITH ALL VENTED LOG MODELS EXCEPT "BIG TEX"
- REGULATOR NOT INCLUDED ON RADCO SETS


3 VALVES IN 1



MANUAL ON/OFF (STD)



ON/OFF REMOTE (WITH AF-2000S SOLENOID)



ON/OFF HIGH/LOW REMOTE (WITH AF-1005 MVHL MOTOR)


MINIMUM FIREPLACE DIMENSIONS - SINGLE SIDED FIREPLACE



LOG SET SIZE WITH SKYTECH 3-IN-1 VALVE	MEASURING POINT FROM FRONT OF FIREPLACE	MINIMUM DEPTH OF FIREPLACE	MINIMUM WIDTH OF FIREPLACE, 5.5" FROM FRONT
MODEL SIZE	A	В	C
16	5.5	14	29
18	5.5	14	29
21	5.5	15.5	34
24	5.5	17	38
30	5.5	18	44
36	5.5	19	50

 $\star\star\star$ PLEASE NOTE THAT NO EXTRA DEPTH IS REQUIRED FOR CEBB $\star\star\star$

MINIMUM FIREPLACE SIZES FOR SEE-THRU LOG SETS

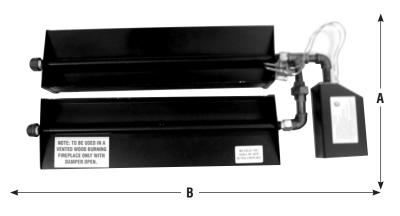

SEE-THRU LOG SET WITH SKYTECH 3-IN-1 VALVE	MINIMUM DEPTH OF FIREPLACE	MINIMUM WIDTH OF FIREPLACE
MODEL SIZE	Α	В
16	14	29
18	14	29
21	15.5	34
24	17	38
30	18	44
36	19	50