


GRILLIGHT

Light removal and battery replacement instructions


1

Depress release clip.




2

Pull light out of handle.

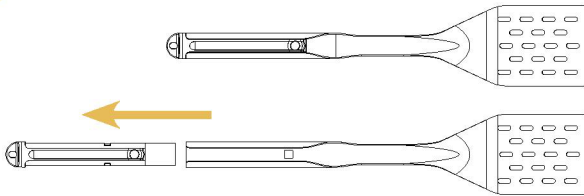


3

Unscrew light head.




4

Slide battery holder out of light body.



5

Remove batteries from battery holder and replace. To reassemble - reverse instructions.

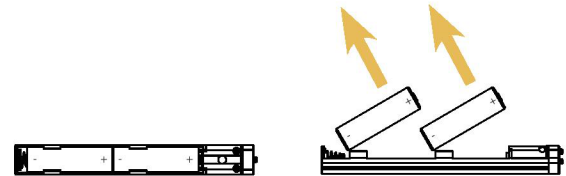

email: sales@grillight.com

write to: Holton Products LLC

3900 Dave Ward Dr. • STE 1900 PMB# 231

Conway, AR 72034

650.918.0967 • www.grillight.com