


Model no:

RB36S25MKIW1

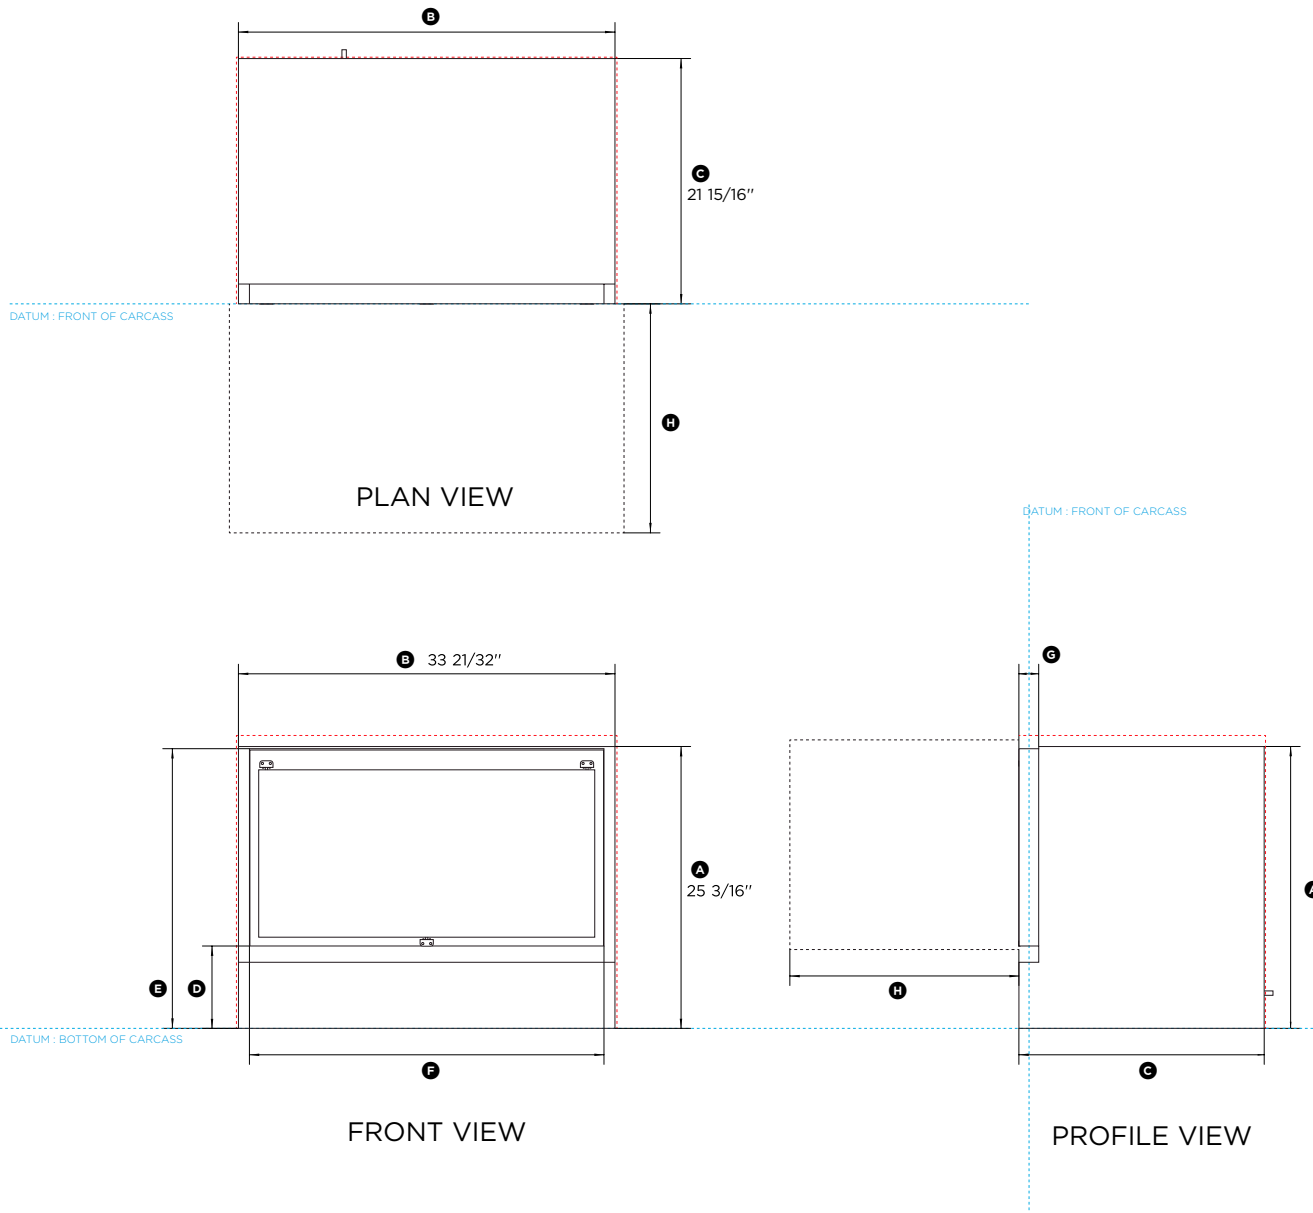

Product Dimensions	in
Ⓐ Overall height* of CoolDrawer™**	25 3/16"
Ⓑ Overall width* of CoolDrawer™	33 11/16"
Ⓒ Depth of CoolDrawer™ chassis (includes power terminal)	21 15/16"
Ⓓ Height from bottom datum to bottom of drawer front	7 3/8"
Ⓔ Height from bottom datum to top of drawer front	25"
Ⓕ Width of drawer front	31 11/16"
Ⓖ Depth of drawer front	1 3/4"
Ⓗ Depth of drawer (open) measured from front datum	20 1/2"

* Does not include the custom door panel or handle to be manufactured and fitted by cabinetmaker.

Minimum Clearances	in
Minimum inside height of cavity from bottom datum*	26 3/16"
Minimum inside width of cabinetry	34"
Minimum inside depth of cavity from front datum	22 1/16"

* Minimum internal height of cabinetry can be 25 3/8" if outlet duct is not used. Please refer to installation manual for details.

DATE: 19.11.2015

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. www.fisherpaykel.com