



Specifications

LCD Screen	42-inch diagonal Color Active Matrix TFT LED LCD
Resolution	1920 x 1080 full-HD 1080p
Aspect Ratio	16:9
Backlight Brightness - Surface Luminance, white	700 nits (cd/m ²)
Contrast Ratio	1300:1
Viewing Angle	178° x 178°
Response Time	12 milliseconds
TV formats	1080p, 1080i, 720p, 720i, 480p, 480i
Input Connectors:	
Tuner	Antenna/CATV (ATSC/QAM/NTSC) x1
HDMI	HDMI™ Input x 2
Video Composite	S-Video x1 and Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x2
PC	15-pin D-sub VGA plus Stereo Audio
Control Set	RS232 Serial, Discrete IR Control, Concealed rear IR Window
Audio Out	Digital SPDIF x 1 (fixed) Analog 1/8" headphone jack (variable)
SB-4217 Speaker bar included (DS-4217P, DS- 4717TSL, DS-4717TSP optional)	10-watt x 2 channel water-resistant detachable speaker module
Exterior	Powder-coated aluminum
Colors	Black, Silver and White
Input Power	100-240 VAC, 50-60 Hz 2.8 A Max (2.25a @ 120VAC)
Operating Temp.	-40° to 122° F. (-40° to 50° C.) *
Non-op. Temp. (Off-mode with power applied)	-40° to 140° F. (-40° to 60° C.) The non-operating temperature feature requires power to be applied
Accessories Included	Water-resistant remote control
Dimensions Landscape	39.43in W x 23.41in H (26.3in H with speaker) x 5.57in D 1002mm W x 595mm H (670mm H with speaker) x 141mm D
Dimensions Portrait	23.41in W x 39.43in H x (42.33in H with optional speaker) x 5.57in D 595mm W x 1002mm H (1075mm H with optional speaker) x 141 mm D
Weight	55.0 lbs; 59.0 lbs with speakers 24.9kg ; 26.8kg with speakers
Residential Warranty	Two year, in-factory, parts and labor
Commercial Warranty	Two year, in-factory, parts and labor
Mount Pattern	400 mm x 400 mm


Landscape Dimensions SB-4217HD & DS-4217TSL

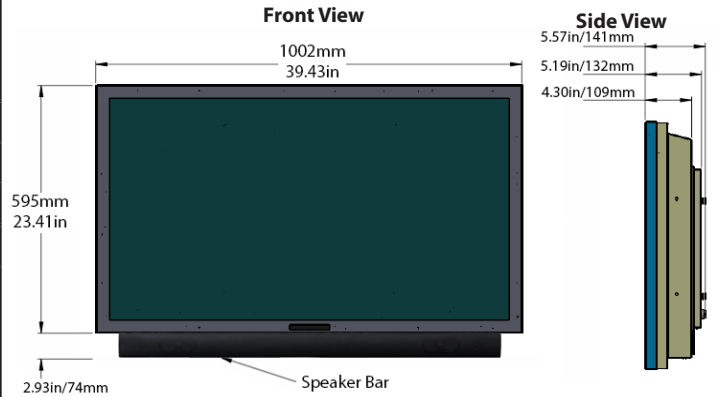

**Speaker bar shown in bottom mount configuration
can also be top mounted.
Speaker bar included with SB-4217HD, optional with DS-4217TSL**

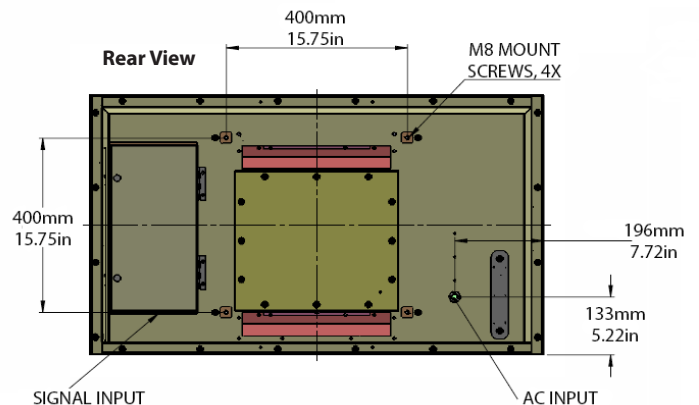

Portrait Dimensions DS-4217P & DS-4217TSP

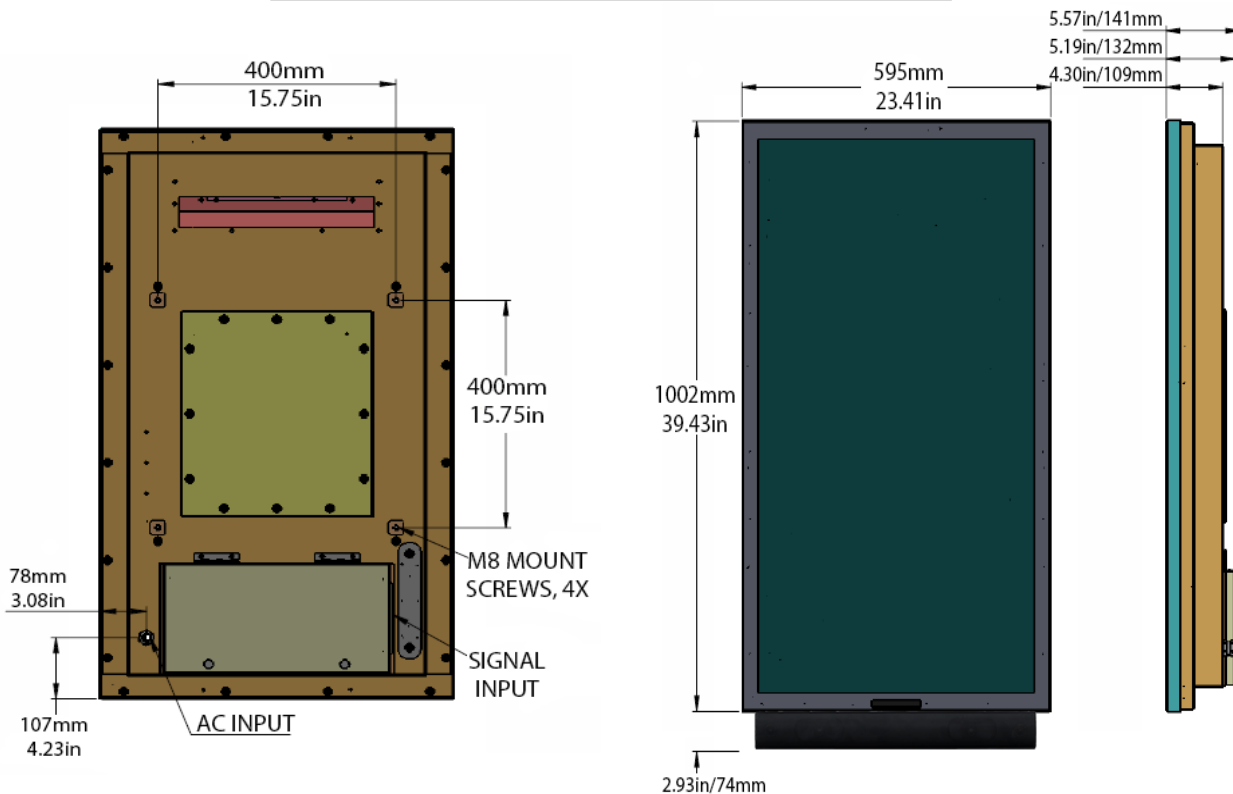

Speaker bar shown in bottom mount configuration can also be top mounted.
Speaker bar optional with DS-4217P and DS-4217TSP