

SCR600BLBI



33.5" x 23.63" x 23.5" (H x W x D)

Commercially listed built-in undercounter beverage center in 24" footprint, with black cabinet, glass door, and lock

Highlights:

Includes adjustable glass shelves for flexible storage

Commercially approved for use in foodservice establishments

Flexible design allows built-in or freestanding use

Glass door provides tempting display of products inside

Product Features:


Commercially approved	ETL-S Approved to ANSI-NSF Standard 7 and CalCode Compliant
Slim undercounter dimensions	Less than 24 inches wide to fit tight spaces
Built-in capable	Make the best use of space by installing your appliance under the counter and flush with other cabinets
Fully finished black cabinet	Allows the unit to be used freestanding
Double pane tempered glass door	Heat resistant design provides clear view to promote impulse buys
Factory installed lock	Keep contents secure with a key lock on the door
Interior light on rocker switch	Turn the light on when you need it and off when you're done with a convenient rocker switch
Automatic defrost	Reduced user maintenance with automatic defrost
Hidden evaporator	Seamless design ensures easier cleaning





SCR600BLBI Specifications:

Overview	
Height to Cabinet	33.5"
Width	23.63"
Depth	23.5"
Depth with Handle	25.5"
Depth with door at 90°	46.0"
Capacity	5.5 cu.ft.
Defrost Type	Automatic
Door	Glass
Cabinet	Black
US Electrical Safety	UL
Canadian Electrical Safety	ULC
Sanitation	ETL-S
Amps	1.3
Shipping Weight	122.0 lbs.
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
Refrigerator Features	
Door Swing	RHD
Reversible	Yes
Height Adjustable	1
Shelf Type	Glass
Shelf Qty	4
Adjustable Shelves	Yes
Thermostat Type	Dial
Fan Type	Exterior
Refrigerant Type	R134a
Refrigerant Amount	1.8oz.
High Side PSI	285.0
Low Side PSI	70.0
Level Legs Qty	4
Interior Light	Yes
Dimensions	
Interior Height	26.0"
Interior Width	20.75"
Interior Depth	17.5"
Compressor Step Height	6.0"
Compressor Step Width	20.75"
Compressor Step Depth	5.0"

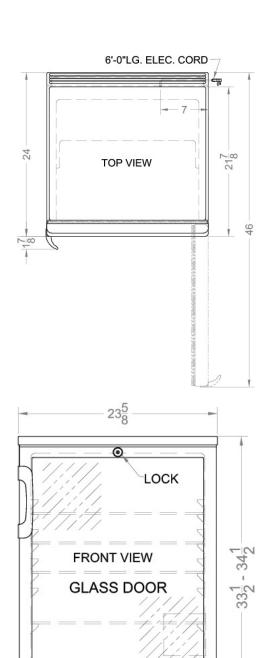

ELEC. CORD

