
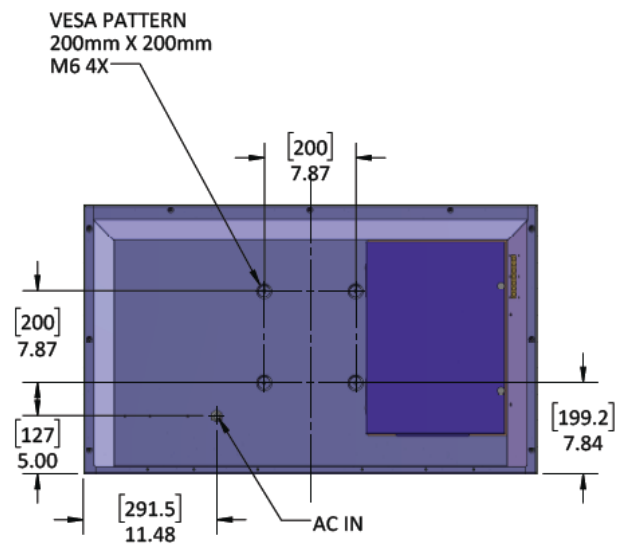


# Specifications

## SunBriteTV Model SB-4374HD

LCD Screen	43-inch diagonal Color Active Matrix TFT LED LCD
Resolution	3840 x 2160 UHD 4k
Aspect Ratio	16:9
Contrast Ratio	4000:1
Frame Rate	60hz
H/V Viewing Angle	178° by 178°
Response Time	6.5 milliseconds
TV formats	2160p*, 1080p, 1080i, 720p, 720i, 480p, 480i * using HDMI only
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC/QAM) x1
HDMI	HDMI Input x4 (Supports HDMI 1.4, HDMI 2.0, HDCP 1.4 & HDCP 2.2)
Video Composite	Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x1
Control Set	Discrete IR Control, Concealed rear IR receiver
Audio Out	Tos-Link Optical audio (Fixed) Analog RCA jacks (variable)
Speakers	20 Watt downfiring internal speakers
Exterior	Powder-coated aluminum
Colors	Black only
Input Power	100-240 VAC, 50-60 Hz 2.8A Max (205 watts/1.8a@120v)
Operating Temp.	-24° to 104° F. (-31° to 40° C.)
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Weatherproof remote control with battery, Dust Cover
TV Dimensions	39" W x 23.2" H x 3.75" D 992mm W x 590mm H x 95mm D
TV Weight	30 lbs. (31.75 kgs)
Residential Warranty	tbd
Commercial Warranty	tbd
Vesa Mount Pattern	200mm x 200mm

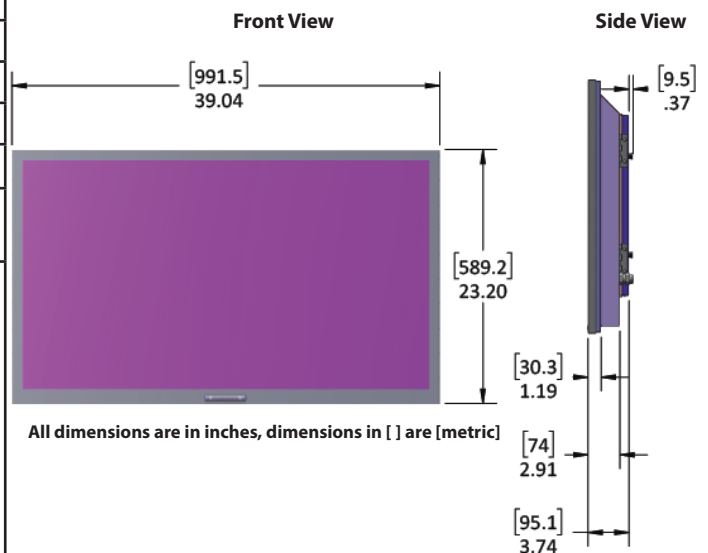



Specifications are subject to change.

# Specifications

## SunBriteTV Model SB-5574HD

LCD Screen	55-inch diagonal Color Active Matrix TFT LED LCD
Resolution	3840 x 2160 UHD 4k
Aspect Ratio	16:9
Contrast Ratio	4000:1
Frame Rate	60hz
H/V Viewing Angle	178° by 178°
Response Time	6.5 milliseconds
TV formats	2160p*, 1080p, 1080i, 720p, 720i, 480p, 480i * using HDMI only
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC/QAM) x1
HDMI	HDMI Input x4 (Supports HDMI 1.4, HDMI 2.0, HDCP 1.4 & HDCP 2.2)
Video Composite	Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x1
Control Set	Discrete IR Control, Concealed rear IR receiver
Audio Out	Tos-Link Optical audio (Fixed) Analog RCA jacks (variable)
Speakers	20 Watt downfiring internal speakers
Exterior	Powder-coated aluminum
Colors	Black only
Input Power	100-240 VAC, 50-60 Hz 2.8A Max (205 watts/1.8a@120v)
Operating Temp.	-24° to 104° F. (-31° to 40° C.)
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Weatherproof remote control with battery, Dust Cover
TV Dimensions	49.6" W x 29" H x 3.86" D 1480mm W x 863mm H x 102mm D
TV Weight	51 lbs.(23.1 kgs)
Residential Warranty	tbd
Commercial Warranty	tbd
Vesa Mount Pattern	400mm x 400mm



Specifications are subject to change.

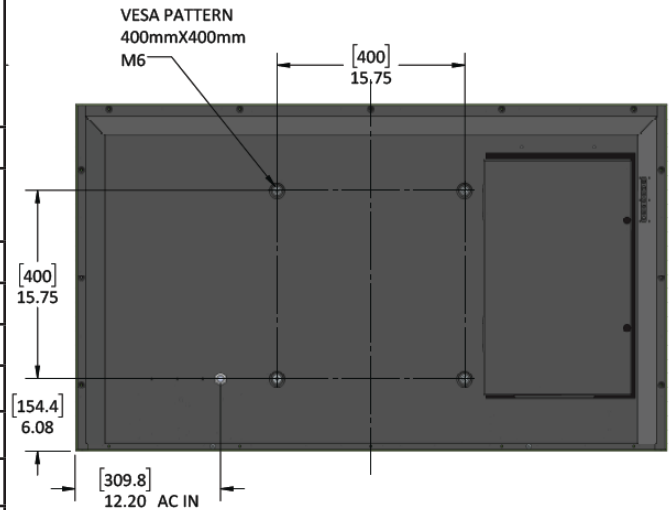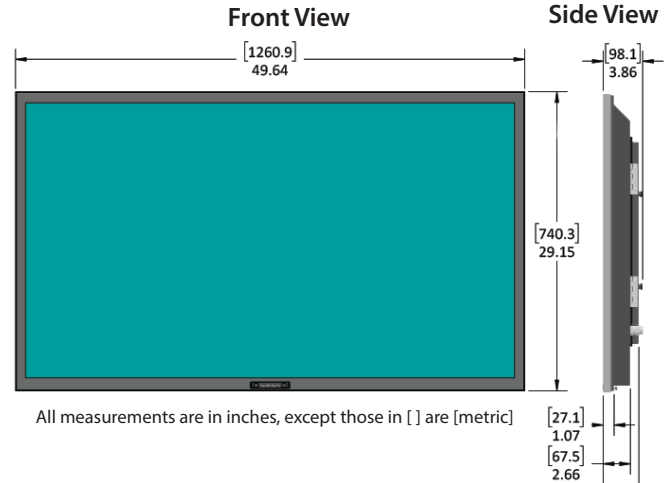

# Specifications

## SunBriteTV Model SB-6574HD

LCD Screen	65-inch diagonal Color Active Matrix TFT LED LCD
Resolution	3840 x 2160 UHD 4k
Aspect Ratio	16:9
Contrast Ratio	4000:1
Frame Rate	60hz
H/V Viewing Angle	178° by 178°
Response Time	6.5 milliseconds
TV formats	2160p*, 1080p, 1080i, 720p, 720i, 480p, 480i * using HDMI only
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC/QAM) x1
HDMI	HDMI Input x4 (Supports HDMI 1.4, HDMI 2.0, HDCP 1.4 & HDCP 2.2)
Video Composite	Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x1
Control Set	Discrete IR Control, Concealed rear IR receiver
Audio Out	Tos-Link Optical audio (Fixed) Analog RCA jacks (variable)
Speakers	20 Watt downfiring internal speakers
Exterior	Powder-coated aluminum
Colors	Black only
Input Power	100-240 VAC, 50-60 Hz 2.8A Max (205 watts/1.8a@120v)
Operating Temp.	-24° to 104° F. (-31° to 40° C.)
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Weatherproof remote control with battery, Dust Cover
TV Dimensions	58.2" W x 34" H x 4.00" D 1480mm W x 863mm H x 102mm D
TV Weight	70.0 lbs.(31.75 kgs)
Residential Warranty	tbd
Commercial Warranty	tbd
Vesa Mount Pattern	400mm x 400mm

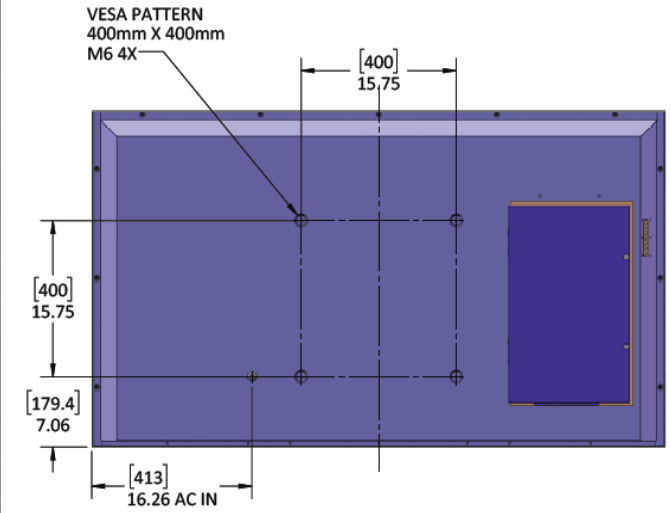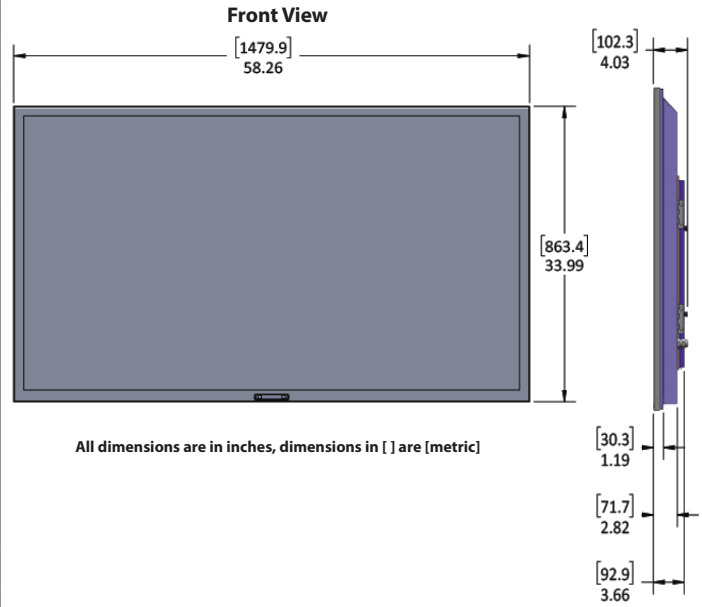

Specifications are subject to change.