



## Villa Flora 30-Inch Round Bistro Table



Customer Service

[CustomerService@ShoppersChoice.com](mailto:CustomerService@ShoppersChoice.com)

Monday - Friday 7-9, Sat. 9-3, Sun. 12-6 CST

Toll Free: 1-877-743-2269















[www.ShoppersChoice.com](http://www.ShoppersChoice.com)
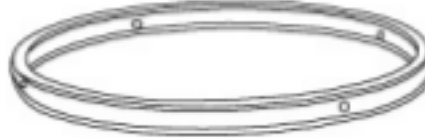
## WARNING

Please read instructions carefully and thoroughly before assembling. Check parts against the parts list to make sure you have all the parts needed for proper assembly. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly. **DO NOT ATTEMPT TO ASSEMBLE IF PARTS ARE MISSING OR DAMAGED. IMPROPER ASSEMBLY MAY RESULT IN DAMAGE OR SERIOUS INJURY**

Place table on a non-abrasive flat surface, and prevent from scratching.

## PARTS LIST

PART	DESCRIPTION	PICTURE	QTY
A	TABLE TOP		1
B	TABLE LEG		4
C	LEG CONNECTOR BRACE		1
D	BOLT		4
E	LARGE FLAT WASHER		4
F	LARGE LOCK WASHER		4
G	NUT		4
H	NUT COVER		4
I	BOLT		4
J	SMALL FLAT WASHER		4
K	SMALL LOCK WASHER		4
L	PVC COVER		4
M	WRENCH		1
N	HEX SCREW DRIVER		1



1

Carefully turn the table top (A) upside down on a soft surface. Loosely attach the table legs (B) to table top (A) with bolts (D) through large flat washers (E), large lock washers (F) and nut (G) using wrench (N).As shown in figure 1 and figure 3.

Do not tighten the bolts at this point.

(Figure 1)

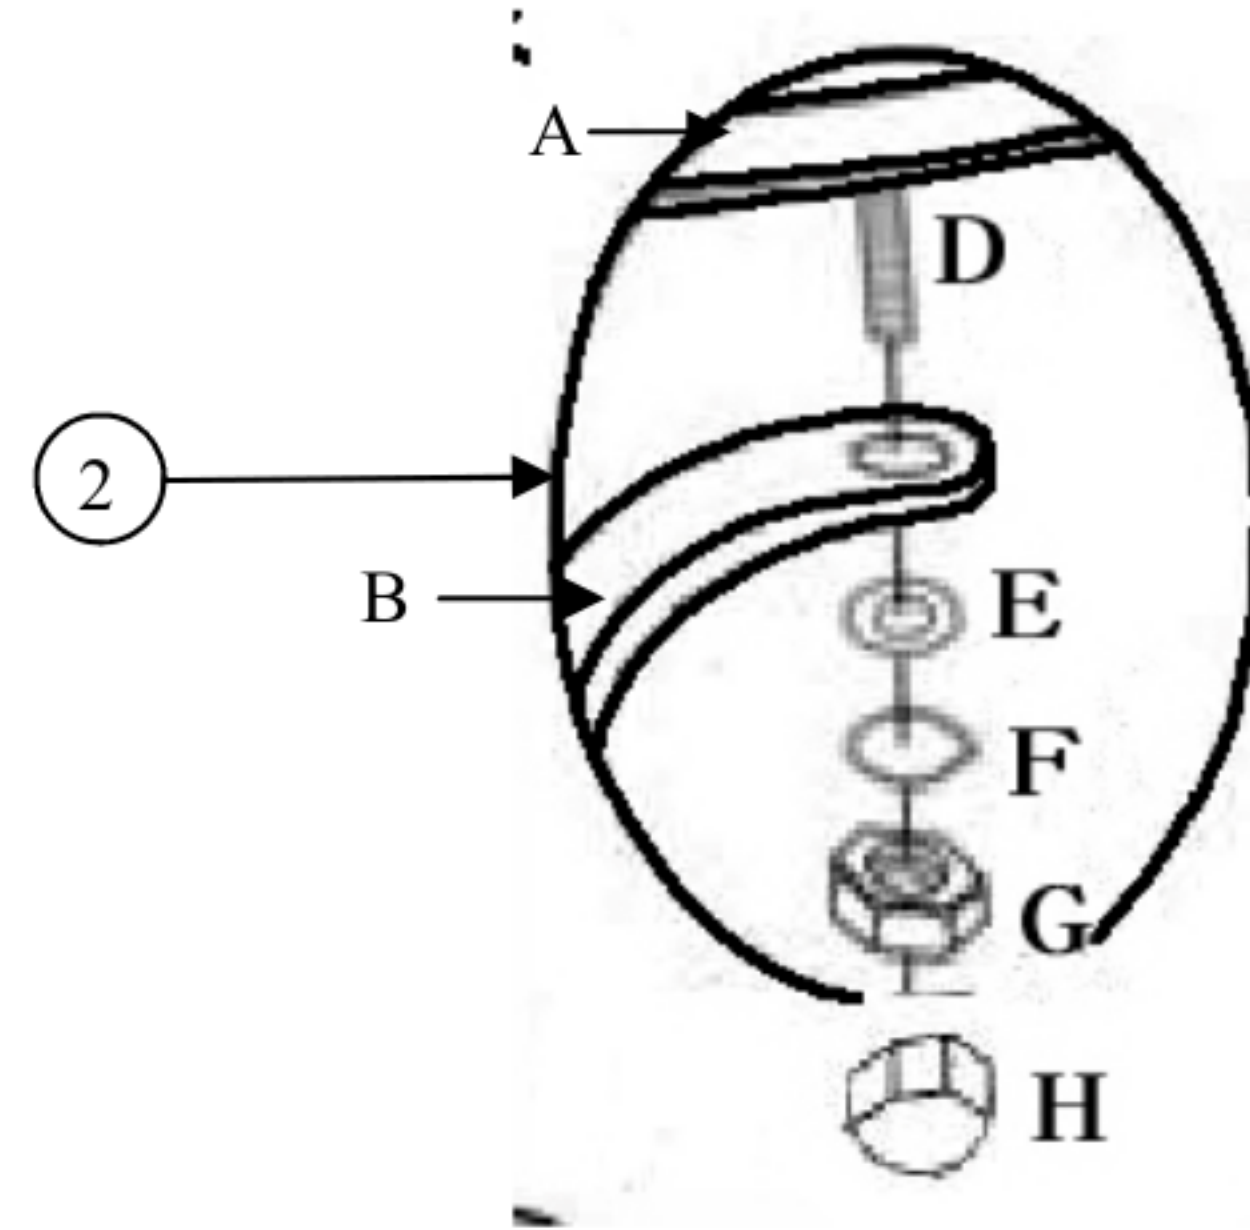


Figure 1

2

Loosely attach the leg connector brace (C) to table legs (B) with bolts (I) through small flat washers (J), and small lock washers (K) using hex screw driver (O).As shown in figure 2 and figure 3.

Do not tighten the bolts at this point.

(Figure 2)

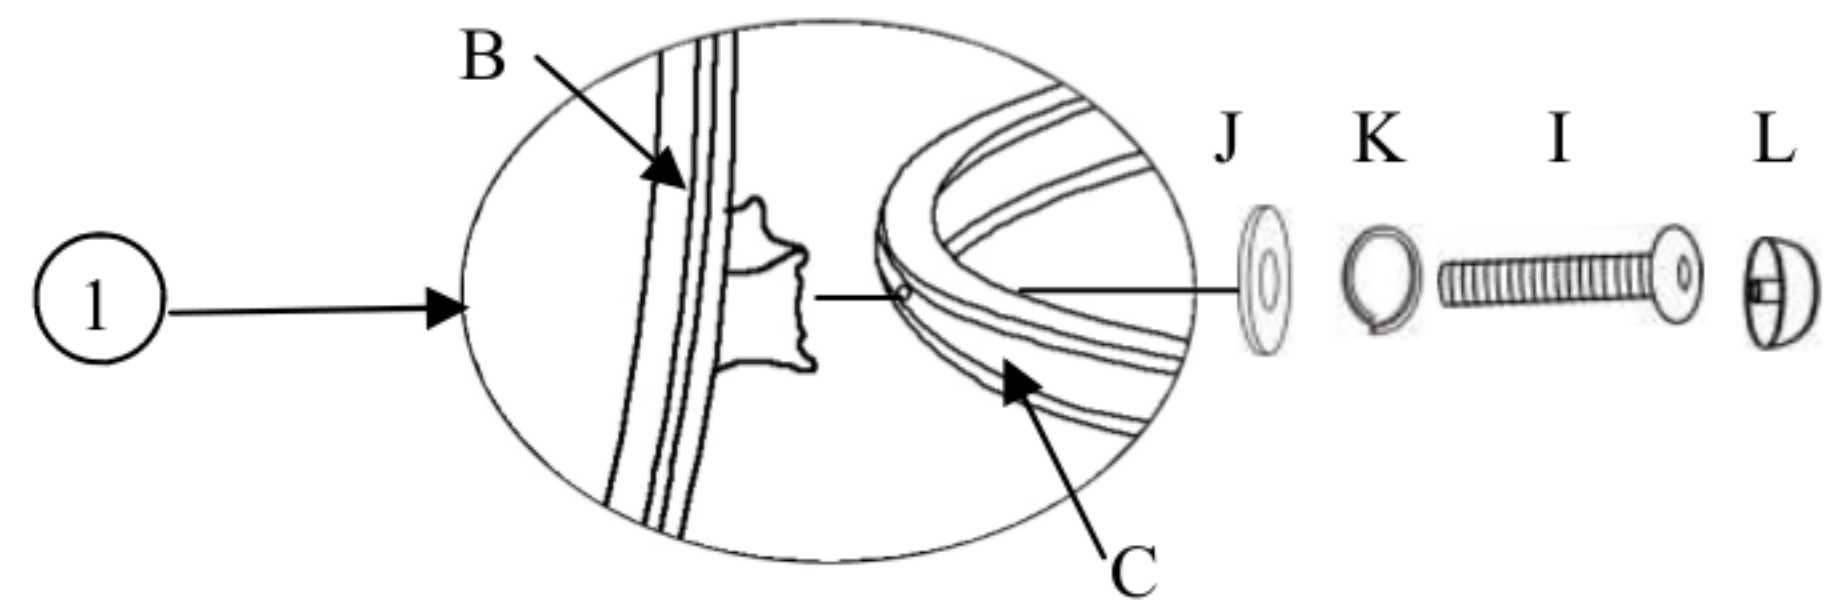


Figure 2

3

Once all the table legs are aligned correctly, tighten all bolts (D&I) with wrench (M) and hex screw driver (N). With the help of another person, carefully turn the table to the upright position. Cover all bolts (D&I) with nut cover (H) and PVC cover (L).

(Figure 3)

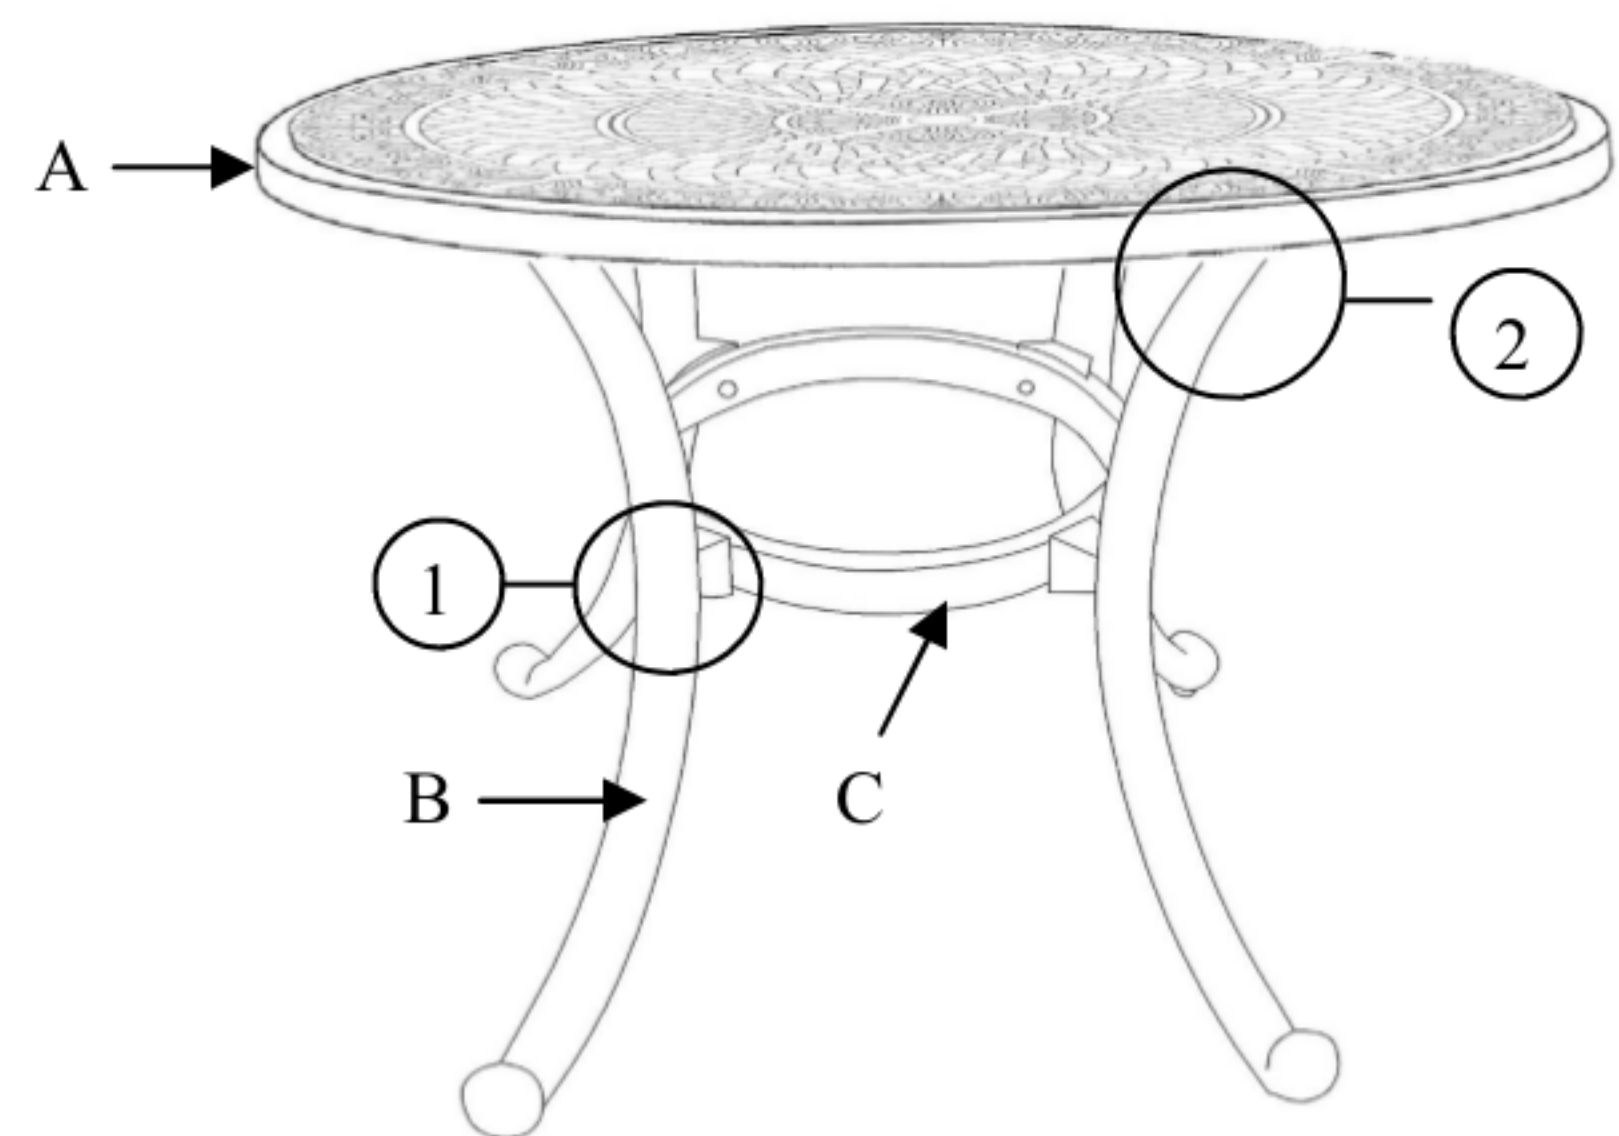


Figure 3