


Temperature Probe description and placement

The temperature probe is made of braided stainless but avoid exposing the thermocouple wires to direct flame this can damage the probe. You can order replacement probes from www.theperfectdraft.com you can insert the probe under the lid of your pit. Or drill a hole into the top of your lid and insert the probe. (Do not pinch the probe wires)



Food Shown was cooked using the
Perfect Draft BBQ Blower!

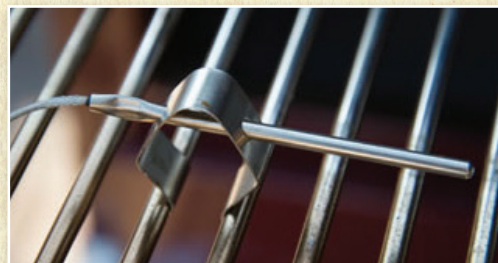

What's included with your BBQ Blower

1. The Perfect Draft BBQ Blower with High Temperature Magnets
2. 12-volt Battery Charger
3. 8 foot Thermometer probe
4. 1" Safety hook with wing nut & screw
5. (On board) Rechargeable 12-volt Samsung Battery
6. 120mm variable speed Fan
7. Adapter Spacer

CAUTION:

Always connect the Adapter Spacer to the Perfect Draft while it's connected to the fire box failure to do so can result in damage to the outer shell of the Blower





Perfect Draft BBQ Blower Quick Start Guide

Perfect Draft BBQ Blower Quick Start Guide



"Fully Charge the on board 12-volt battery before using the unit only use the Charger that came with the Perfect Draft or you will damage the battery." Installing The Perfect Draft BBQ Blower with safety hook with adapter spacer.

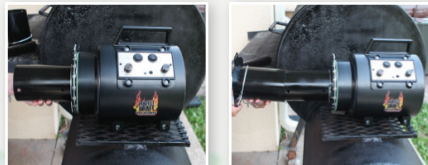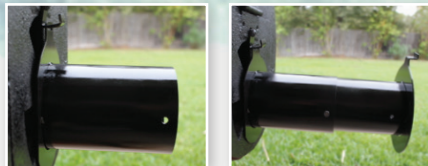

1

Drill a 1/4" inch hole just above your air intake on your firebox. Insert the screw and safety hook into your firebox. Connect the hook end of the adapter to the face of the Perfect Draft.

2

Connected and secure the Adapter to the Blower Once connected, hook the Perfect Draft onto your firebox.



The Perfect Draft comes with **2 Types of Adapters** if your smoker firebox is larger than 24" you need to buy our Flex Hose to connect to your Perfect Draft Blower.



New Flexible Adapter (sold separately)

1

Attached the slot end of the adapter into the safety hook slot.

2

Slide the hose clamp on the adapter

3

Slide the flexible hose on the adapter and secure it with the clamp

4

Attached the other adapter to the front of the Blower and secure it with the hose clamp.

Operating Your BBQ Blower

When starting your BBQ fire add your desired charcoal and wood and light it. Next attach your Perfect Draft and put the switch on manual operation to help regulate the airflow to get the fire going. Once you have a good fire flip the switch to automatic mode and set to your desired temperature 250 degrees.


How to adjust your Stack Exhaust (Flute) when using Your Perfect Draft

- ✓ Open the stack damper **100%** when starting your fire
- ✓ Close stack damper **50% - 60%** for medium to high temperature smoking
- ✓ Close stack damper **75% - 85%** for low temperature smoking
- ✓ If the Perfect Draft has trouble maintaining the temperature adjust the stack exhaust as needed.



Controlling the BBQ Blower in Automatic Mode

Note: The user can't control the fan speed in Automatic mode

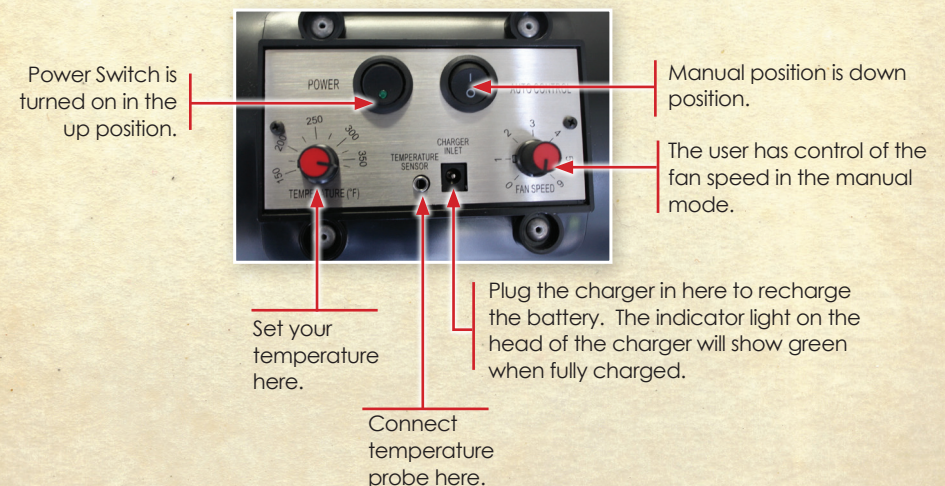

Now Enjoy your Perfect Draft Blower!