# DRGB3601



**Four 15,000 BTU burners found on the DRGB3601 are versatile boil a pot of water and simmer delicate sauces.**

**The 5.2 cubic foot oven is spacious enough to hold multiple dishes at the same time, while the convection feature ensures even cooking temperatures through out the oven cavity 22,000 Oven BTU Burner.**

**For searing and broiling recipes, our range boasts a powerful 16,500 BTU Infrared broiler.**

**Our commercial grade stainless steel griddle is thermostatically controlled for precise cooking temperatures. The included grease trap makes for an easy clean-up.**

**Constructed using all stainless steel, the DRGB3601 meets the highest standards of both quality and durability, in an industry that demands perfection.**

NXR

# Product Spec Sheet

**DRGB3601 ALL-GAS FREESTANDING RANGE with GRIDDLE ( 36 Inch )**

| Control Panel Features | |
|---|---|
| Manual Oven Control | Yes |
| Two Tone Control Knobs with Stainless Steel Bezel | 6 |

| Cooktop | |
|---|---|
| 15,000 BTU Sealed High-Output Burner with 620 BTU Variable Simr | 4 |
| 18,000 BTU Infrared Griddle | Yes |
| Full-Length Grates ( front to back ) | 2 |
| Electronic Ignition with Auto Re-Ignition | Yes |

| Oven Feathers | |
|---|---|
| Capacity | 5.2 Cu. Ft. |
| Manual Convection Cooking Mode | Yes |
| Bake Burner | 22,000 BTU |
| Infrared Broiler Burner | 16,500 BTU |
| Broil Pan | Included |
| Blue Interior | Yes |
| Racks | 2 |
| Halogen Lights | 2 |

| Additional Features | |
|---|---|
| Four Inch Stainless Steel Backsplash | Yes |
| Full Stainless Steel Side Panels | Yes |
| Professional Handle | Yes |
| Full adjustable -Heavy-Duty Legs | Yes |

| Specifications | |
|---|---|
| Electrical Rating | 120V/60Hz/15 or 20A |
| Product Weight | 385 Lbs. |
| Shiping Weight ( Approx. ) | 424 Lbs. |

## Electrical Power Supply Requirements

**• Use 120V, 60Hz, properly grounded branch circuit protected by a 15-amp or 20-amp circuit breaker or time delay fuse.**

Your range must be electrically grounded in accordance with local codes or, in the absence of local codes, in accordance with the National Electrical Code (ANSI/NFPA 70, latest edition). In Canada, electrical grounding must be in accordance with the current CSA C22.1 Canadian Electrical Code Part 1 and/or local codes. A copy of this standard may be obtained from: The National Fire Protection Association, 1 Batterymarch Park, Quincy, Massachusetts 02269-9101.

## Gas Supply Requirements

**•Shipped natural gas; accepts standard residential 1/2" NPT gas service line.**

Installation of this range must conform with local codes, or in the absence of local codes, the National Fuel Gas Code (ANSI Z223.1, the latest edition). In Canada, installation must conform to the current Natural Gas Installation Code, CAN/CGA-B149.1 and with local codes where applicable. This range has been design-certified by the American Gas Association according to ANSI Z21.1, latest edition and Canadian Gas Association according to CAN/CGA-1.1 latest edition.

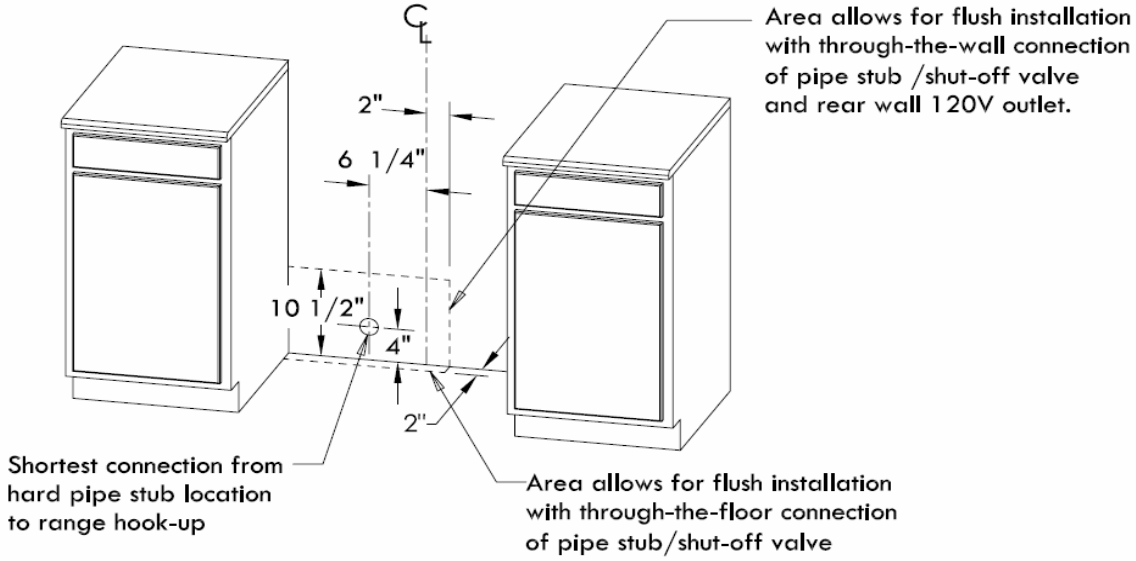


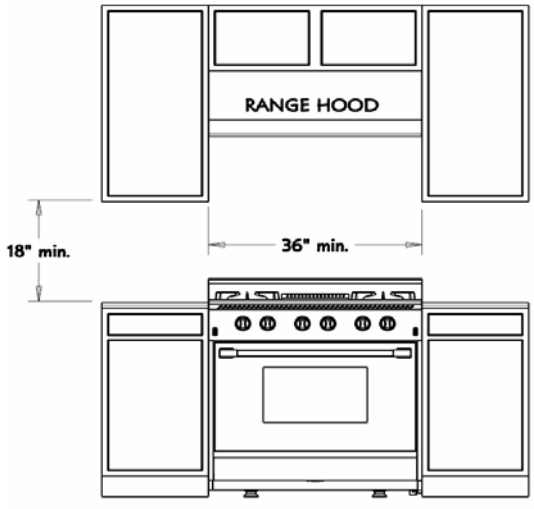


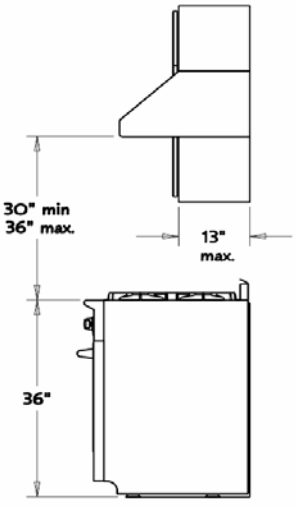


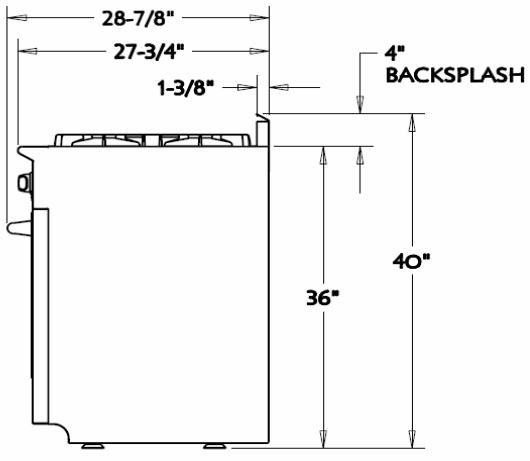


OVERALL DEPTH WITH OVEN DOOR IN FULLY OPEN POSITION = 44 1/2"