



All Electrical Transformers plug into the grill behind the control panel on the left side, if you are looking at the grill from the front.



All Gas Line Connection are at the rear bottom right of the grill, if you are looking at the grill from the front.

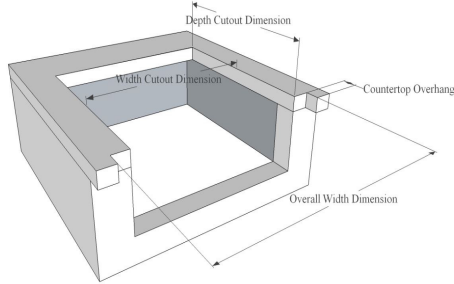

Ventilation of Island:

- *Minimum of 2 vents for an island.
- *Each vent must be at least 20 sq in.
- *Alternate sides of the island is preferred for cross-ventilation.
- *See Owners Manual for full details

Clearance to Combustible Construction:

When choosing a location for your gas grill, you should not locate it under any combustible construction. The side, bottom, and back of the grill should not be any closer than 24" to combustible material.

Model	Product Description	Cutout Dimensions			Overall Dimensions			Total BTU Ratings		Electrical Outlets Needed (110V)	
		Height	Width	Depth	Height	Width	Depth	LP	NG	Rotisserie	Lights
Grills											
CCX2	28" Grill w/ Hood Lights	10 1/4"	25"	20 1/2"	23"	28"	25 1/2"	40,000	40,000	No	Qty 1
C1C28	28" Grill w/ Hood Lights	10 1/4"	26 3/8"	20 1/2"	23"	28"	25 1/2"	40,000	40,000	No	Qty 1
CC(X)3 / C1C34	34" Grill w/ Hood Lights	10 1/4"	31"	20 1/2"	23"	34"	25 1/2"	60,000	60,000	No	Qty 1
CCX4 / C1C36	36" Grill w/ Hood Lights	10 1/4"	32 1/2"	20 1/2"	23"	35 1/2"	25 1/2"	80,000	80,000	No	Qty 1
CS(X)36 / C1S36	36" Grill w/ Hood Lights & Rotis	10 1/4"	32 1/2"	20 1/2"	23"	35 1/2"	25 1/2"	90,000	90,000	Qty 1	Qty 1
CSL(X)36 / C1SL36	36" Grill w/ Hood & LED Lights	10 1/4"	32 1/2"	20 1/2"	23"	35 1/2"	25 1/2"	90,000	90,000	Qty 1	Qty 2
CSL(X)42 / C1SL42	42" Grill w/ Hood & LED Lights	10 1/4"	39 1/2"	20 1/2"	23"	42"	25 1/2"	110,000	110,000	Qty 1	Qty 2
CH(X)50 / C1HY50	50" Hybrid Grill w/ Hood Lights	12 1/2"	47 3/4"	20 1/2"	23"	50"	25 1/2"	40,000	40,000	No	Qty 1
C1CH36	36" Charcoal Grill	12 1/2"	32 1/2"	20 1/2"	23"	35 1/2"	25 1/2"	N/A	N/A	No	No
Side Burners											
CSSB(X) / C1SB	Coyote Single Side Burner	10 1/4"	10 1/8"	13 5/8"	13"	11 3/8"	17"	15,000	15,000	No	No
CDSB(X) / C1DB	Coyote Dual Side Burner	10 1/4"	11 7/8"	20 1/4"	13"	13 1/8"	23 1/4"	30,000	30,000	No	No
CPB / C1PB	Coyote Power Burner	10 1/4"	20 1/2"	21"	13"	24"	24 1/4"	60,000	60,000	No	No
Insulated Jackets											
CJAKTCC2	Insulated Jacket for CC2	11"	28 1/4"	21 3/4"	11"	30 3/4"	22 1/4"	For Combustible Construction			
CJAKTCC3	Insulated Jacket for CC3	11"	34 1/4"	21 3/4"	11"	36 3/4"	22 1/4"	For Combustible Construction			
CJAKTCS36	Insulated Jacket for CS36	11"	35 3/4"	21 3/4"	11"	38 1/4"	22 1/4"	For Combustible Construction			
CJAKTCS42	Insulated Jacket for CS42	11"	42 1/2"	21 3/4"	11"	45"	22 1/4"	For Combustible Construction			
Access Doors											
CDA2426	26" Double Access Door	20 1/2"	20 3/4"	N/A	24"	24 1/4"	3"	N/A			
CDA2431	31" Double Access Door	20 1/2"	26 1/2"	N/A	24"	30"	3"	N/A			
CDA2439	39" Double Access Door	20 1/2"	34 1/2"	N/A	24"	38"	3"	N/A			
CSA2014	Single Access Door 20" x 14"	20 1/2"	14 1/2"	N/A	22"	16"	3"	N/A			
CSA1420	Single Access Door 14" x 20"	14 1/2"	20 1/2"	N/A	16"	22"	3"	N/A			
CSA2417	Single Access Door 24" x 17"	24 1/2"	17 1/2"	N/A	26"	19"	3"	N/A			
CSA1724	Single Access Door 17" x 24"	17 1/2"	24 1/2"	N/A	19"	26"	3"	N/A			
Drawers											
C2DC	2 Drawer Cabinet	20 1/2"	14 1/2"	17 1/2"	22"	16 1/4"	18"	N/A			
C3DC	3 Drawer Cabinet	24 1/2"	16 3/4"	17 1/4"	26"	18 1/2"	18"	N/A			
CSSD	Single Storage Drawer	13 1/2"	31 1/2"	20 1/2"	15"	32 1/2"	21 1/4"	N/A			
CDPC31	31" Dry Pantry	20 1/2"	26 1/2"	23"	24"	30"	24"	N/A			
CTC	Pull Out Trash & Recycle	23 7/8"	23 3/4"	18"	26 1/4"	26 3/4"	19"	N/A			
CPOD	LP Tank or Trash Drawer	20 1/2"	14 1/4"	17 1/2"	22"	15 1/2"	18"	N/A			
CPTH	Paper Towel Holder	8 1/4"	13 1/2"	8"	10"	15"	9"	N/A			
CWD	Warming Drawer	9 1/2"	28 1/4"	23 1/2"	10 3/4"	29 1/2"	26 3/4"	Qty 1 Plug Needed - unit is 450 Watt			
Combo Drawers											
CCD-2DC	Double Drawer Combo	20 1/4"	43 3/8"	17 1/8"	24 1/8"	45 1/4"	18 3/8"	N/A			
CCD-2DC31	31" Double Drawer Combo	20 1/2"	26 1/2"	20 1/8"	24"	30"	21 1/8"	N/A			
CCD-POD	Pull Out Drawer Combo	20 3/8"	43 3/8"	16 1/4"	24 1/8"	45 1/4"	17 1/2"	N/A			
CCD-WD	Warming Drawer Combo	19 1/2"	40 5/8"	25 1/4"	20 3/4"	42 1/8"	26 1/2"	Qty 1 Plug Needed - unit is 450 Watt			
Refrigeration & Refreshment Centers											
CBIR	4.1 Outdoor Refrigerator	34"	20 3/4"	23"	33 3/4"	20 1/2"	22 3/4"	Qty 1 Plug Needed - Vented Bottom Front			
C1BIR24	5.5 Outdoor Refrigerator	33 1/4"	23 3/4"	22 3/4"	33"	23 1/2"	22 1/2"	Qty 1 Plug Needed - Vented Bottom Front			
CDIC	Drop In Cooler	12"	23 1/4"	17 1/4"	15"	24 1/2"	18"	Can be turned in either direction			
CPOC	Pull Out Ice Chest	17 1/2"	23 3/4"	24 3/4"	20 1/2"	26 3/4"	25 1/2"	Additional support for weight needed			
CRC	Refreshment Center	10"	29 1/4"	22 3/4"	10 3/4"	30 1/4"	29"	Drain Hose Included			

Cutout Dimensions: Build your bbq island to these specifications to ensure proper fit of the product being used.

Overall Dimensions: Describe the actual dimensions of the product once it is resting/installed in a bbq island.

Clearance to Combustibles: The dimensions required by the manufacturer for clearance to combustible materials.

Total BTU Ratings: These numbers show the total volume of gas used by the product while operating at full capacity.

Important Note to Consumer: This is not intended to replace your Owners' Manual which contains specific safety requirements and consumer guidelines. Please refer to your Owners' Manual prior to installing or operating your built-in bbq. All grills listed are intended for outdoor use only and are not intended to be installed in or on recreational vehicles or boats.

Questions? Visit our website at www.coyoteoutdoor.com